

AD-A273 274

(12)



US Army Corps
of Engineers
Hydrologic Engineering Center

Flood Damage Analysis Within the Readiness Management System

DTIC
GPO 1992 O-466 D

November 1992

93-29170

173PQ

Approved for Public Release. Distribution Unlimited.

PR-20

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188									
1a. REPORT SECURITY CLASSIFICATION Unclassified		1b. RESTRICTIVE MARKINGS											
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION/AVAILABILITY OF REPORT Distribution of this document is unlimited.											
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE													
4. PERFORMING ORGANIZATION REPORT NUMBER(S) PR-20		5. MONITORING ORGANIZATION REPORT NUMBER(S)											
6a. NAME OF PERFORMING ORGANIZATION Hydrologic Engineering Center		6b. OFFICE SYMBOL (if applicable) CEWRC-HEC	7a. NAME OF MONITORING ORGANIZATION										
6c. ADDRESS (City, State, and ZIP Code) 609 Second Street Davis, CA 95616-4687		7b. ADDRESS (City, State, and ZIP Code)											
8a. NAME OF FUNDING/SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (if applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER										
8c. ADDRESS (City, State, and ZIP Code)		10. SOURCE OF FUNDING NUMBERS <table border="1"><tr><td>PROGRAM ELEMENT NO.</td><td>PROJECT NO.</td><td>TASK NO.</td><td>WORK UNIT ACCESSION NO.</td></tr></table>			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT ACCESSION NO.					
PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT ACCESSION NO.										
11. TITLE (Include Security Classification) Flood Damage Analysis Within the Readiness Management System													
12. PERSONAL AUTHOR(S) Thomas B. Johnson (Developmental Assignment from Omaha District) and Michael Burnham													
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM _____ TO _____	14. DATE OF REPORT (Year, Month, Day) November 1992	15. PAGE COUNT 168									
16. SUPPLEMENTARY NOTATION													
17. COSATI CODES <table border="1"><tr><th>FIELD</th><th>GROUP</th><th>SUB-GROUP</th></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table>		FIELD	GROUP	SUB-GROUP							18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) Flood Damage, Readiness Management System, Geographic Information Systems, Near-Real Time, Reservoir Operations, HEC-Data Storage System, HEC-DAMCAL, Geographic Resources Analysis Support System (GRASS), HEC-PBA		
FIELD	GROUP	SUB-GROUP											
19. ABSTRACT (Continue on reverse if necessary and identify by block number) The Readiness Management System (RMS) was developed for the Corps of Engineers Emergency Management offices. The system provides near real-time information for operation of Corps reservoirs during flood emergencies. The RMS presented utilizes GIS technology for developing input data for hydrologic, hydraulic, and flood damage analysis programs. HEC has adapted flood damage programs for use in the RMS to provide near real-time estimates of flood damage for specific events. Existing programs HEC-DAMCAL and HEC-PBA were adapted for use in the RMS.													
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION										
22a. NAME OF RESPONSIBLE INDIVIDUAL Darryl W. Davis, Director, HEC			22b. TELEPHONE (Include Area Code) (916) 756-1104	22c. OFFICE SYMBOL CEWRC-HEC									

Flood Damage Analysis Within the Readiness Management System

November 1992

US Army Corps of Engineers
Hydrologic Engineering Center
609 Second Street
Davis, CA 95616-4687

(916) 756-1104

Accession For	
NTIS	CRA&I <input checked="" type="checkbox"/>
DTIC	TAB <input type="checkbox"/>
Unannounced <input type="checkbox"/>	
Justification	
By	
Distribution /	
Availability Offices	
Dist	Available at GPO Stock No.
A-1	

Final Project Report No. 93-001

PR-20

Flood Damage Analysis within the Readiness Management System

Table of Contents

Section	Page
Preface	iii
1. Introduction	1
1.1. Readiness Management System	1
1.2. Flood Damage Analysis	2
2. System Installation	7
2.1. Directory and File Structure	7
2.2. Installation Procedure	9
3. Flood Damage Computations	10
3.1. Computational Procedure	10
3.2. Input Requirements	10
3.3. Program Operation	15
3.4. Output Capabilities	20

Appendices

Appendix A References	21
Appendix B Study Example	25
Appendix C HEC-DAMCAL Data	31
Appendix D HEC-PBA Data	79

Figure

1. Flood Damage Package	3
-------------------------------	---

Tables

1. Damage Reach Definitions	11
2. Urban Landuse Categories	12
3. Rural Landuse Categories	12

Preface

This report describes application of the Hydrologic Engineering Center Flood Damage Analysis (HEC-FDA) programs used in the Omaha District, Corps of Engineers, Readiness Management System demonstration project below Oahe Dam on the Missouri River. The project applied Geographic Information System (GIS) data, processed and stored using the Geographic Resources Analysis Support System (GRASS), to generate much of the input data to the flood damage programs. The raster formatted data included land use (damage categories), reference flood, topographic, and damage reach boundary variables. The HEC-DAMCAL program used the data to develop, and store in HEC-DSS, elevation-damage and elevation-number of structure relationships by category and damage reach and elevation-crop area relationships by damage reach. These relationships were subsequently retrieved by the HEC-PBA program to generate urban and crop flood damage by damage reach, state, and congressional district boundary.

Thomas Johnson, on developmental assignment to HEC from the Omaha District, was the principal engineer on the project. Omaha District staff provided the GIS data. Staff from the Construction Engineering Research Laboratory (CERL), Corps of Engineers, assisted with the GRASS applications. Donna Lydon, Bob Carl, Dick Fong, and Marilyn Hurst from HEC assisted in various aspects of the study. Loshan Law was responsible for the final report preparation. Michael Burnham, Chief of the Planning Analysis Division, HEC, provided general guidance. Darryl Davis was Director of HEC during the conduct of the study.

Flood Damage Analysis within the Readiness Management System

1. Introduction

1.1. Readiness Management System

The Readiness Management System (RMS) was developed for the Corps of Engineers' Emergency Management offices. The system provides near real-time assessments of the impacts associated with rainfall-runoff, tributary inflows and the operation of Corps reservoirs during emergency situations. The RMS utilizes Geographic Information System (GIS) technology combined with hydrologic, hydraulic and flood damage programs. The system enables users to estimate effects of reservoir operation and tributary inflows on flow conditions for specific stream reaches given various operation scenarios.

The need for the RMS became evident because of an inability to assess downstream impacts during previous dam safety exercises performed by the Omaha District. The damages and/or benefits associated with various operation scenarios were estimated from generalized damage curves. At that time, there was no means of quickly modeling reservoir releases to estimate potential damages. As a result, the potential damages considered as part of the decision making process were crude and lacked adequate support.

Although decisions on reservoir operation are not made by a single entity, the advantages of having a single system as a basis for decision making are numerous. These advantages include:

- A common data base utilized by those involved in the decision making process provides more consistent results.
- More realistic estimates of impacts associated with various reservoir releases by modeling releases using a realistic flood damage model.
- Detailed graphics capabilities within the GIS allow decision makers to quickly visualize flood boundaries and areas impacted.
- Higher degree of confidence in decisions that are made because of increased reliability from using analytical techniques.
- Better documentation of the decision making process because all of the information used in the analysis is stored and can be retrieved at any time.

The primary advantage of having an RMS is the fact that all offices, both Federal and State, are using the same system as a basis for their actions. Once a system is accepted as the standard, it serves as a common basis for making decisions during an actual

emergency. The utilization of a standardized system also provides a means for checks and balances because everyone using it should be getting approximately the same results.

1.2. Flood Damage Analysis

The Hydrologic Engineering Center (HEC) adapted flood damage programs for use in the RMS primarily to provide near real-time estimates of flood damages for specific events. Some of the data needed to compute flood damages was developed using a Geographical Information System (GIS). The Geographic Resources Analysis Support System (GRASS), developed by the U.S. Army Corps of Engineers, Construction Engineering Research Laboratory (CERL), was chosen as the GIS software to be used in the RMS.

HEC used existing flood damage programs with some minor modifications. The Damage Reach Stage-Damage Calculation (HEC-DAMCAL) and Project Benefit Accomplishment (HEC-PBA) programs were adapted for use in the RMS. The Data Storage System (HEC-DSS) is also used in the RMS as a means of storing, manipulating and transferring information. The four major software components used in flood damage calculations are:

- (1) The GRASS GIS package
- (2) The HEC-DAMCAL program
- (3) The HEC-DSS package
- (4) The HEC-PBA program

Figure 1 is a schematic representation of the how the flood damage analysis components interact within the RMS. The following paragraphs describe the operation of each component.

(1) Geographic Resources Analysis Support System, GRASS was developed by the U.S. Army Corps of Engineers, Construction Engineering Research Laboratory (CERL). GRASS was chosen as the GIS software for the RMS and is useful for analyzing and displaying spatial data related to flood damage analysis. The program can be used to generate a data base file which contains information for each grid cell. The attributes listed in the data base file are necessary for calculating flood damages using the HEC-DAMCAL program.

(2) Damage Reach Stage-Damage Calculation, HEC-DAMCAL was developed in the mid 1970's as part of a family of computer programs designed to provide a systematic technique for managing and analyzing spatial data for use in water resources management investigations. The program accesses data stored in a grid cell data base. A more detailed description of how the HEC-DAMCAL program operates is contained in the DAMCAL users manual and is available from the Hydrologic Engineering Center (U.S. Army Corps of Engineers, February 1979).

HEC-DAMCAL has the ability to evaluate damages for existing or future land use conditions. The program also has the ability to evaluate damages associated with:

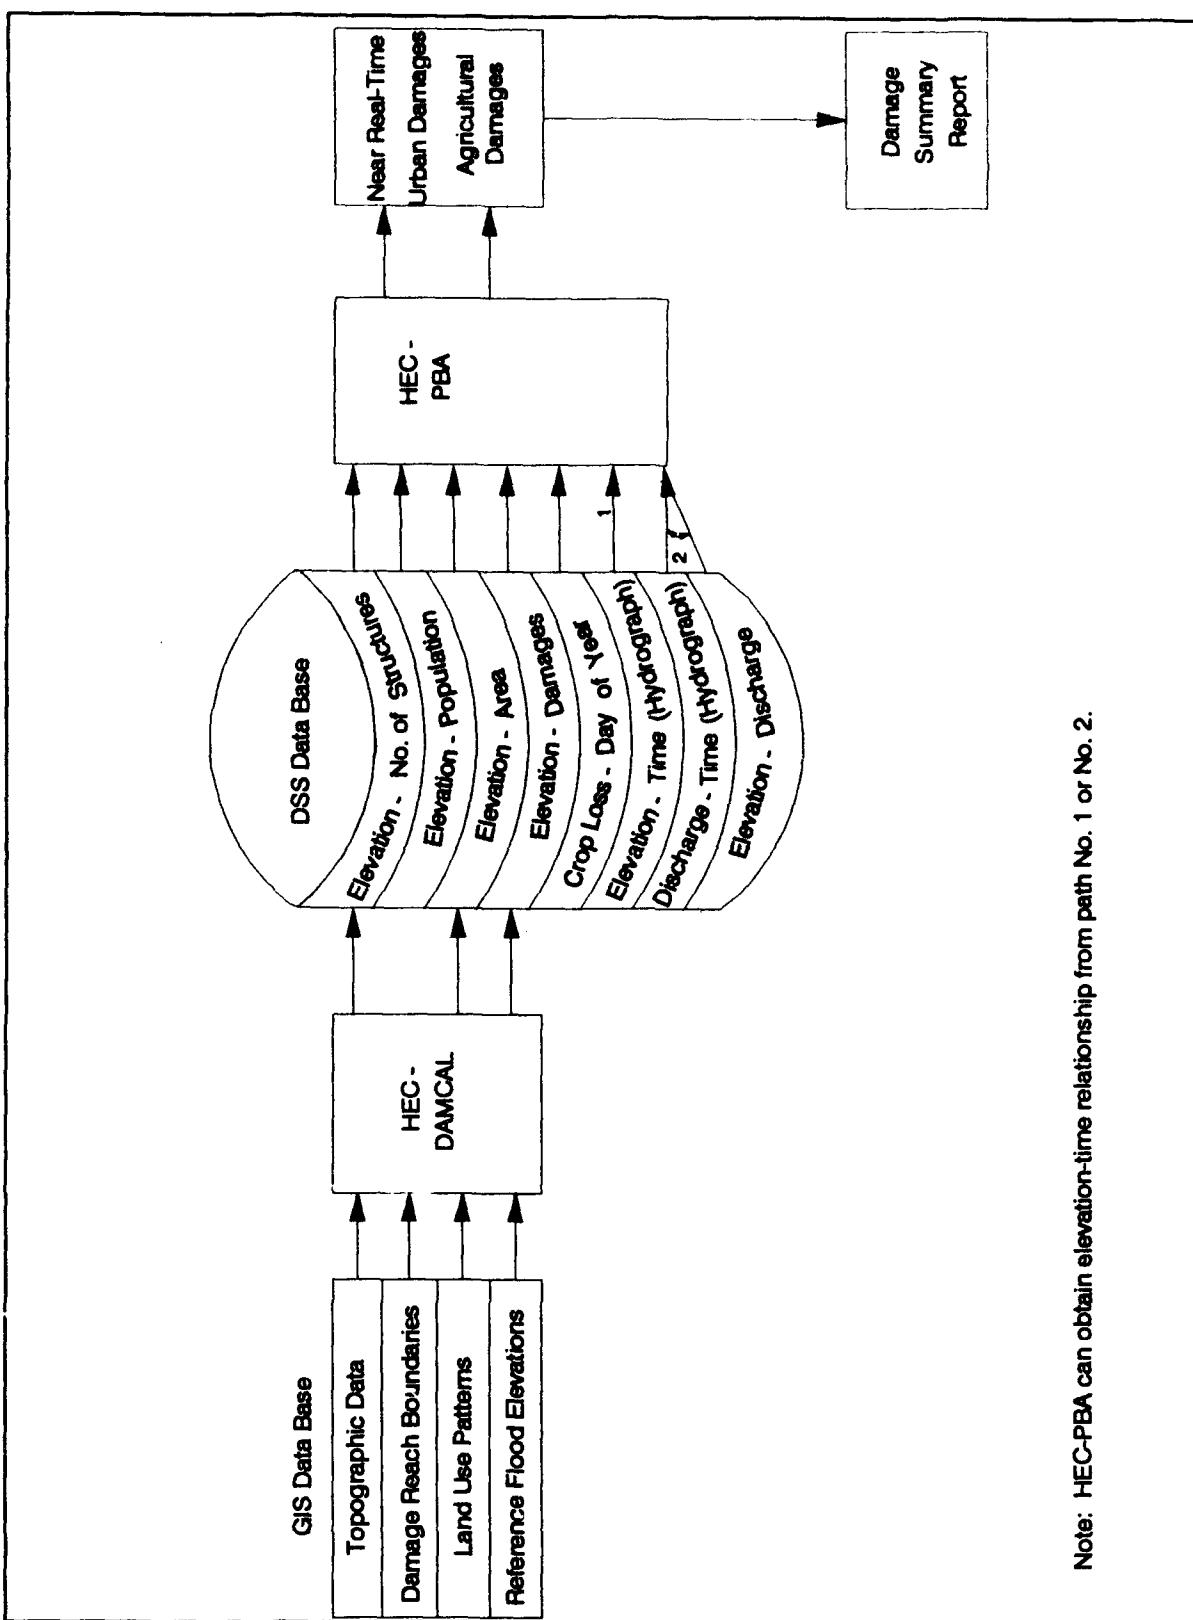


FIGURE 1 Flood Damage Package

Note: HEC-PBA can obtain elevation-time relationship from path No. 1 or No. 2.

- nonstructural alternatives such as flood plain management policies,
- flood proofing alternatives (raising structures or adding flood resistant materials to structures),
- permanent evacuation of structures in the floodplain, and
- any combination of the preceding.

Damage Reaches. HEC-DAMCAL operates on the assumption that all water surface profiles are parallel throughout a damage reach which is one of the basis for the reach delineation. Therefore, the user must evaluate a range of water surface profiles for a study area and define damage reaches that satisfy that criteria as nearly as possible while maintaining the economic detail desired for analysis. After the damage reach boundaries have been chosen, they are encoded into the grid cell data base by assigning each grid cell a damage reach identification number.

The program aggregates elevation-damage relationships from each grid cell within a damage reach to an index location. The index location can be anywhere in the reach. Total damages for a reach are reported based on elevations at the index location.

Reference Flood. In order to account for slope in the water surface profile of a reach, HEC-DAMCAL defines the relationship between flooding at each grid cell and flooding at the index location. This is done by use of the reference flood. The program assumes that all floods are spatially distributed the same as the reference flood. A reference flood is best defined by a hypothetical frequency flood event in the mid range of damage potential. Reference flood water surface elevations must also be encoded into the grid cell data base by assigning a water surface elevation for each cell. If a flood larger than the reference flood is to be analyzed, the reference flood boundaries must be extended to include the entire area of interest. Therefore, some grid cells may have a reference flood elevation which is actually lower than the ground elevation.

Computations. The user must develop an input file for HEC-DAMCAL which defines the format of the grid cell data base, composite damage functions for each land use category, and flood elevations at the index location for each damage reach. Composite damage functions define the potential structural and nonstructural damages for a range of flood depths for each land use category. Flood elevations at the index locations can be specified for single flood events such as the 50-, 10-, 2-, or 1-percent chance exceedance frequency events.

The program assigns a stage-damage relationship to a grid cell based on the land use (damage category) specified and the composite damage function for that particular land use. The stage is converted to elevation the grid cell by setting the zero stage equal to the first floor elevation of the structure. HEC-DAMCAL then aggregates the elevation-damage relationship of each cell by damage category to the index location by adjusting the elevation scale based on the difference in the reference flood elevations. The damages are reported separately for each land use. Land use categories can also be aggregated into a single elevation-damage relationship for the damage reach. If single flood events are specified, the program calculates damages for those events based on the water surface elevations at the index location.

If the user wants to determine what effect flood proofing would have on reducing damages within a reach, they need only specify the land use categories to be flood proofed

and the elevations at the index location below which no flood damage would occur. Similarly, the effects of removing contents (evacuation) can be estimated by specifying the land use categories to be evacuated.

HEC-DAMCAL also calculates elevation-area flooded relationships using the same techniques described previously. Total area flooded within a reach is likewise based on the water surface elevation for a given flood event at the index location. It should be noted that when a user specifies a damage category (land use) to be flood proofed, they are flood proofing all grid cells with that land use classification. Consequently, the area flooded should be determined for non flood proofing conditions.

Another item in which the user may be interested in is the number of structures in each land use category flooded by a single event. HEC-DAMCAL can calculate the elevation-structures flooded relationship by simply defining the average density (structures/developed area) and the percent of the total area that is developed, for each land use category. The number of structures flooded is also based on the flood elevation at the index location.

(3) Project Benefit Accomplishment, HEC-PBA was developed to determine damages prevented (benefits) by existing Corps projects. The program is currently undergoing modifications and has not yet been officially released. A detailed description of the program operation will be contained in the HEC-PBA users manual and will be available from the Hydrologic Engineering Center in the near future.

The HEC-PBA program enables the user to calculate damages to both urban and agricultural areas on a near real-time basis. The program accounts for damages which may have occurred from a previous flood event by using a "look-back" routine. By accounting for any previous damages and time to rebuild in an urban area, the program determines a more realistic value for damages from a single flood event. For agricultural areas the program accounts for previous flood events based on time required for the land to dry out and whether there is sufficient time to replant the crop. If the farmer has experienced a previous flood and replanted, the program also accounts for any reductions in the expected yield. The look-back time period can be several years or a few months, depending on the users preference.

Damage Reaches. HEC-PBA calculates damages based on damage reach definitions. The program does not perform calculations on individual grid cells. Damage reaches are often defined for urban areas and agricultural areas separately. HEC-PBA uses a special crop damage routine which analyzes agricultural damages differently than urban damages.

The damage reach definitions must also be consistent with jurisdictional boundaries. HEC-PBA is able to report damages based on several different boundary definitions such as community, State, County, and Congressional districts. The program aggregates damages for all of the reaches within a specified jurisdictional area. Therefore, it is important that damage reaches do not overlap a boundary line.

Crop Loss Functions. A significant advantage of the HEC-PBA program is its sophisticated crop damage analysis capabilities. The program accounts for the type of crop, planting season, growing season, time to harvest and average yield per acre. Crop damages are calculated based on the time of year that a flood occurs and duration of flooding. The

damage is based on a reduction in the expected yield caused by flooding. Dollar values are then assigned to the lost yield based on expected market values for the crop. Total damages also include losses associated with investments in crop production at the time of the flood.

The program uses crop loss functions to define the relationship between time of the year and potential impacts to crops should flooding occur. Each type of crop has a unique crop loss function. The relationship is based on the percentage of a crop that would be lost due to flooding for both the timing and duration aspects. The program does not account for the depth of flooding and its effects on different crops.

Computations. The user must develop an input file for HEC-PBA which defines the jurisdictional boundaries, damage reaches, crop characteristics, reconstruction time, and period of analysis. Crop loss functions for each crop must also be developed. HEC-PBA obtains the elevation-damage and elevation-area relationships from HEC-DAMCAL. The program is not intended to interface directly with the GIS data base.

HEC-PBA calculates damages using hydrograph data which specifies the flood elevation and time of year the flood occurs. If a hydrograph contains several months of data and more than one flood event exceeds the zero damage elevation, the user must specify the event for which damages are calculated by defining the starting and ending dates of the analysis. A look-back date can be specified prior to the starting date to account for previous events. This establishes the potential damage status at the beginning of the analysis.

Urban damage calculations are based on elevation-damage relationships and hydrograph information. Each damage category is analyzed separately within a damage reach. Agricultural crop damage calculation are based on elevation-area relationships, hydrograph information, and crop loss functions. Each crop type is analyzed separately within a damage reach.

The HEC-PBA program also calculates the number of structures flooded by a single event for each land use category. Closely related to the number of structures flooded is the number of people affected. However, the population affected depends a great deal on the time of day and the day of the week on which the flood occurs. HEC-PBA does not account for these population variations. The program does accept input of elevation-population relationships which are intended to represent a measure of people impacted by a flood.

(4) Data Storage System, HEC-DSS is used for the flood damage analysis within the RMS to transfer information from HEC-DAMCAL to HEC-PBA. The HEC-DSS utility programs used in conjunction with the flood damage programs are: DSSUTL, DISPLAY, REPGEN and DSSPD.

DSSUTL. The DSSUTL program provides a means of performing utility functions on data stored in HEC-DSS. These functions include tabulating, editing, copying, renaming, and deleting data. The program also offers the capability of formatting and copying data into an ASCII sequential file for transfer to another computer, or for use by a program without HEC-DSS capabilities.

DSPLAY. The DSPLAY program enables a graphical display of data contained in an HEC-DSS file. Time-series and paired data can both be displayed. Up to seven curves and six different y-scales may be displayed at one time. The program is useful for visualizing the data generated by HEC-DAMCAL to verify that the results are reasonable. It is also useful to view the crop loss functions to be used by HEC-PBA and verify that the curves are consistent and meaningful.

REPGEN. The report generator, REPGEN, is used to simplify and automate the production of routine reports. REPGEN provides for the retrieval and presentation of data from an HEC-DSS file or text file on a pre-specified, user defined, fixed format. The format is the equivalent of a blank form onto which variable information is entered in designated locations.

DSSPD. The DSSPD program provides a means of entering paired function data into an HEC-DSS file. The crop loss functions used in HEC-PBA are paired data functions that relate percent crop loss to days of the year. They can be entered into HEC-DSS using the DSSPD program.

2. System Installation

2.1. Directory and File Structure

The flood damage analysis package for the Omaha District RMS was set up with four directories. Each directory contains specific files. It is important that these directories be created prior to installation. The required directories are:

- (1) HECEXE
- (2) RMS
- (3) DAMCAL
- (4) PBA

(1) The HECEXE directory contains all of the executable versions of HEC programs. The HEC programs needed for flood damage computations within the RMS are;

- COED.EXE - Corps editor used for file editing.
- DAMCAL.EXE - Flood damage calculation model for GIS data.
- DRIVERS.EXE - File to manage display drivers.
- DSPLAY.EXE - DSS program for graphical displays.
- DSSPD.EXE - DSS program for entering paired data.
- DSSTS.EXE - DSS program for entering time series data.
- DSSUTL.EXE - DSS program for editing DSS records.

- MATHPK.EXE - Program for manipulating DSS records.
- PREPBA.EXE - Preprocessor program for PBA
- PBA.EXE - Flood damage and benefit calculations.

(2) The RMS directory contains all of the screen, macro and batch files necessary for operation of the RMS menu screens. All files with no extension are batch files that are substituted into one of the TEMP.BAT files when needed. Files with a BAT extension are normal batch files. Files with a MAC extension are macro files used by the PREADR program to evoke different responses when choices are made within the menu screens. Files with an SCN extension are screen files used by PREADR to display the menu screens.

(3) The DAMCAL directory contains the input and output files necessary for operation of the HEC-DAMCAL program. This directory also contains the HEC-DSS file and the macro and batch files used to reformat the DSS records. *It is essential that the names of these files always remain the same in order for the menu selections to operate properly.* The following is a list of the files in the DAMCAL directory:

- MISSOURI.DSS - HEC-DSS file which contains all of the DSS records output from HEC-DAMCAL and records to be used as input to HEC-PBA.
- MOAGRI.DC - Input file used by HEC-DAMCAL to compute damages in agricultural areas.
- MOAGRI.DCO - Output file from HEC-DAMCAL for agricultural areas.
- MOURBAN.DC - Input file used by HEC-DAMCAL to compute damages in urban areas.
- MOURBAN.DCO - Output file from HEC-DAMCAL for urban areas.
- * ● AGRISTAT.GDB - Grid cell data file containing attribute information for grid cells in agricultural areas.
- * ● URBSTAT.GDB - Grid cell database file containing attribute information for grid cells in urban areas.

* NOTE - The files with a GDB extension are generated on the workstation using the GIS. The RMS flood damage analysis package was developed to allow the GDB files to remain on the workstation and be accessed automatically through a local area network. If a network is not available, it will be necessary for these files to be copied and installed on the PC.

(3) The PBA directory contains the input and output files necessary for operation of the HEC-PBA Preprocessor and Analysis programs. *It is essential that the names of these files remain the same in order for the menu selections to operate properly.* The following is a list of files in the PBA directory;

- PREPBA.IN - Input file for the HEC-PBA Preprocessor program.
- PREPBA.OUT - Output file from the HEC-PBA Preprocessor program.
- PBA.IN - Input file for the HEC-PBA Analysis program.
- PBA.OUT - Output from the HEC-PBA Analysis program.

2.2. Installation Procedure

The installation procedure is generally similar to installation of other HEC products. As previously mentioned, the appropriate directories must be created prior to installation and files placed directly in those directories. The installation disks contains the same directories and files as will be needed on the PC. It is important that all files are copied from each directory on the disk to directories of the same name on the PC. The PKUNZIP program is used to decompress those files with a ZIP extension.

It will also be necessary to load GSS device drivers for producing graphical displays with the DSPLAY program. The installation instructions and diskettes are provided separately. The installation of drivers is menu driven and user friendly.

This product has minimum hardware requirements because of the amount of computing required. It may also be necessary to modify the AUTOEXEC.BAT and CONFIG.SYS files on the PC prior to beginning operation. The following sections describe the requirement and necessary modifications.

(1) Hardware Requirements. This product was developed using a 486/33C personal computer with 8 MB's of extended memory. The HEC-DAMCAL, MATHPK, and HEC-PBA programs all require extended memory. The programs will not operate properly if the EMM 386 memory manager is being used.

It is recommended that this product be installed on nothing less than a 386/25C computer with a math coprocessor and at least 3 MB's of extended memory. The DSPLAY program requires a minimum of 450K of resident memory, with the device drivers loaded, to operate properly. In most instances it will be necessary to have all network software unloaded while running DSPLAY. This product was designed to have the network software running only during operation of the HEC-DAMCAL program.

(2) AUTOEXEC.BAT Modifications. The AUTOEXEC.BAT file must contain the following statements:

PATH C:\HECEXE - The HECEXE directory must be listed in the path statement.

SET CGIPATH=C:\GSS - Statement to define the directory in which the device drivers are located.

(3) CONFIG.SYS Modifications. The CONFIG.SYS file must contain the following statements:

DEVICE=C:\DOS\ANSI.SYS - To allow display of the menu screens.

LASTDRIVE=Z - Needed if a fictitious drive is created to allow access to data on the workstation.

3. Flood Damage Computations

3.1. Overview of Computational Procedure

Calculation of the potential flood damage within the Readiness Management System (RMS) framework relies on the Geographic Information System (GIS) to provide input data for the HEC-DAMCAL program. HEC-DAMCAL generates relationships between water surface elevations and the damages, number of structures, and total area that could be flooded. These relationships are then applied to a particular flood event using the HEC-PBA program. The information is transferred to HEC-PBA from HEC-DAMCAL using HEC-DSS. HEC-DSS is also used to graphically view program inputs and outputs. Selected input for HEC-PBA is directly from HEC-DSS.

The Appendices contain examples of flood damage computations using the procedure described above. Examples of the data used during development of the flood damage analysis package is shown in Appendix B, for the HEC-DAMCAL program, and Appendix C, for the HEC-PBA program. The Appendices also contain example output results.

3.2. Input Requirements

There are three mechanisms for defining input for flood damage computations. Data from the GIS is used as input to HEC-DAMCAL. The HEC-DAMCAL and HEC-PBA programs both require instructions from an input file.

(1) GIS Data. The flood damage computations are determined based on data generated by the (GIS). The Geographic Resources Analysis Support System (GRASS), Version 4.0, was the GIS software used in this exercise.

The information, necessary for flood damage analysis, developed using the GIS are:

- **Damage Reach Designations,**
- **Landuse Classification,**
- **Ground Elevations; and,**
- **Reference Flood Elevations.**

GRASS uses the Relational Information Manager (RIM) to manage its data base. The HEC-DAMCAL program requires a data file in ASCII form which specifies the attributes listed above for each grid cell to be analyzed. After all of the necessary attribute maps have been created, GRASS is able to generate the data file using RIM.

Damage Reach Designations. The damage reaches were defined based on the largest possible flood boundary, corporate limits, reservation boundaries and county lines. The flood boundary that would result from failure of Oahe Dam was chosen to define the maximum possible flooded area. Information from the U.S. Census Bureau's TIGER files was used to define the city, county and reservation boundaries.

The damage reach boundaries were digitized using the v.digit program in GRASS. The flood boundary for dam failure was used as the base map. TIGER data was used to overlay the other boundaries. A new vector file was created which divided the flooded area into polygons which represent the damage reaches. A raster map was then generated using GRASS to label all of the grid cells within a polygon with the appropriate damage reach number. The area between Oahe Dam and Big Bend Dam includes 15 damage reaches, as defined in Table 1.

TABLE 1
Damage Reach Definitions

<u>Reach</u>	<u>Reach Definition</u>
1	Hughes County, upstream of Pierre.
2	Stanley County, upstream of Fort Pierre.
3	City of Pierre.
4	City of Fort Pierre.
5	Stanley County, Bad River, upstream of Fort Pierre.
6	Stanley County, downstream of Fort Pierre.
7	Hughes County, downstream of Pierre to Reservation.
8	Stanley County, downstream of Reach 6 to Reservation.
9	Lower Brule Reservation, Stanley County.
10	Crow Creek Reservation, Hughes County.
11	Lower Brule Reservation, Lyman County.
12	Crow Creek Reservation, Hyde County.
13	Crow Creek Reservation, Buffalo County.
14	City of Lower Brule.
15	City of Fort Thompson.

Landuse Classification. The landuse for this exercise was defined for urban areas and rural areas separately using different methods. It is important to realize that landuse classification can be done many different ways. The landuse classifications used during the development of the flood damage programs should be considered approximate and used for test purposes only. It is recommended that the landuse be reclassified by a qualified analysts to provide more meaningful flood damage computations.

Landuse for the urban areas, Pierre and Fort Pierre, was classified based on aerial photographs at a scale of 1" = 1000'. The photos were converted into GIS format at the Omaha District office. The v.digit program within GRASS was used to divide the urban area into polygons of similar landuse. The flood boundary for dam failure was used as the base map to define the outer edge. The aerial photos were used as a backdrop for the area. A new vector map was created which divided the urban areas into 12 different landuse types. A raster map was then generated from the vector map to label all of the grid cells within each polygon with the appropriate landuse category. The landuse categories for the urban areas are shown in Table 2.

TABLE 2
Urban Landuse Categories

<u>Category</u>	<u>Category Type</u>
1	Residential
2	Mobile Homes
3	Schools
4	Offices
5	Warehouses
6	Department Stores
7	Grocery Stores
8	Motels
9	Industrial
10	Recreation Areas / Golf Courses
11	Undeveloped Open Area
12	Water Bodies

The most difficult classification within the urban areas is for industrial and commercial properties. Categories 5, 6, 7 & 8 were chosen as being representative of typical commercial enterprises. It is important that landuse, and especially industrial and commercial areas, be verified by a qualified economist.

Landuse classification for rural areas was based on the National Oceanic and Atmospheric Administration (NOAA) Advanced Very High Resolution Radiometer (AVHRR) data for land cover characterization in the conterminous United States. The AVHRR data used was originally developed at a spatial resolution of 1 kilometer. Although the data is somewhat crude, it does distinguish between cropland and natural vegetation. The data are also collected frequently which also adds to its accuracy.

The original AVHRR data had 150 land cover categories. The data was reclassified using GRASS for the area within the flood boundary between Oahe and Big Bend Dams. It is necessary to distinguish between cropland and undeveloped land for flood damage computations. Therefore, the land cover was reclassified into 4 categories, as listed in Table 3.

TABLE 3
Rural Landuse Categories

<u>Category</u>	<u>Category Type</u>
1	Cropland
2	Grassland
3	Woodland
4	Water

Ground Elevations. The topographic data, which defines the ground elevations within the study area, was developed at the Omaha District office. The data was not modified prior to being used in the flood damage analysis. It was evident that the data does contain some errors. It is recommended that the topographic data be verified in regard to its relationship with the landuse.

Reference Flood Elevations. The reference flood information was developed using the GIS and HEC-2 output. There are several different floods that could be used to represent the reference flood. The flood elevations associated with a release of 200,000 cfs from Lake Oahe and a pool level of 1423 ft msl at Lake Sharpe was chosen as the reference flood for testing purposes.

A vector file was created using the v.digit program in GRASS. The flood boundary for dam failure was used as the base map and a vector map showing the HEC-2 cross section locations was used as an overlay. The cross section locations were digitized onto the base map along with some intermediate sections. The sections were labeled with the water surface elevations calculated by HEC-2. A raster map was generated from the vector map which labeled those grid cells that fell along the labeled lines. A surface contour algorithm was then used to assign values to the grid cells between cross sections.

The result is a data file in ASCII form which defines the damage reach, landuse classification, ground elevation, and reference flood elevation for each grid cell in the study area. Separate data files are created for urban and rural areas because they are analyzed separately. The data files generated by GRASS are in free format and cannot be used directly by HEC-DAMCAL. A shell script was written which converts the data file into a fixed format for use in HEC-DAMCAL.

(2) HEC-DAMCAL Input. The HEC-DAMCAL program requires input from two sources: the GIS and an input file. The input file contains the following types of information:

- Job Control Information,
- Grid Cell Data File Definitions,
- Depth-damage Functions,
- Structure and Content Values,
- Landuse Densities,
- Damage Reach Information; and,
- Single Event Flood Elevations (optional).

Job control information specifies the number of reaches to be analyzed, number of landuse conditions and output specifications. Definitions for the data file includes the size of the file (rows and columns), number of grid cells, physical size of the grid cells (acres) and how the data file is formatted.

Depth-damage functions define the potential damage to structures and contents as a percentage of their value for a range of flood depths. Structure values are specified in terms of an average for the particular land use type. Content values can be specified in dollars or as a percentage of the structure value. Landuse density is specified based on the average number of structures per grid cell for a particular landuse type.

Damage reach information includes a reach label, elevation of the reference flood at the index location and the range of elevation values to be analyzed. Damages for single flood events can be analyzed by specifying the flood elevations at the index location for each event.

A more detailed description of the format and definitions of input records for HEC-DAMCAL is contained in the DAMCAL User's Manual, dated February 1979, and is available from the Hydrologic Engineering Center, Davis, California.

(3) HEC-PBA Input. The HEC-PBA program is separated into two different programs known as the Preprocessor and the Analysis programs. Each program requires different input data. The advantage of having the program divided is that normally the Preprocessor only needs to be run once, unless the landuse crop functions, or other conditions change. If there are no changes, the Analysis program can analyze several different flood events.

The Preprocessor program uses the following data stored in HEC-DSS:

- Elevation-Damage Relationships,
- Elevation-Area Relationships,
- Elevation-Structures Relationships,
- Crop Loss Functions; and,
- Flood Hydrographs.

The elevation-damage, area and structures relationships are output from HEC-DAMCAL. The crop loss functions define the potential crop losses for each crop type throughout the entire year. They are put into HEC-DSS format using DSSPD, which was developed for entering paired data. Flood hydrographs are usually input to HEC-DSS by a rainfall-runoff model such as HEC-1.

The Preprocessor program requires the following information in its input file:

- Job Control Information,
- Boundary Definitions,
- Crop Production and Market Statistics,
- Damage Reach Information; and,
- Project Information (optional).

Job control information specifies the type of output desired. Boundary definitions are used to aggregate damages within specified political boundaries such as communities, Counties, Corps Districts, Congressional Districts and Flood Control Districts. These boundaries do not necessarily correspond to damage reach boundaries. There may be several damage reaches within a single political boundary.

Crop production and market statistics specify the planting dates, average annual yield, average market price and harvest costs for each crop type. The spatial distribution of crops must also be specified. The distribution is usually specified as a percentage of the total cropland being planted in a particular crop within each damage reach; however, the actual area planted in a particular crop can also be specified.

Damage reach information specifies a label for the reach, the political boundaries within the reach and the appropriate hydrographs for the reach. The flood stage must also be specified as the elevation at which damages begin within each reach. It is important that the damage reach designations be exactly the same as those defined in the HEC-DAMCAL program.

Project information for levees and/or reservoirs may be specified if the user is interested in analyzing both with- and without-project conditions. The program allocates benefits to one or several projects based on a reduction in damages and a weighting scheme defined by the user.

The Analysis program requires little input. The following is a list of the necessary input:

- **Job Specifications,**
- **Period of Analysis,**
- **Project Benefit Allocations for Reservoirs (optional); and,**
- **Summary Report Table Selection.**


Job specifications define output options and allow for adjustment of crop market values using price index factors. The period of analysis is specified by beginning date, ending date and look-back date. Project benefit allocation for reservoir is specified as a percentage of the total benefits for each project. Summary report table selection can be based on any of the political boundaries and/or damage reach boundaries.

A more detailed description of the format and input records for both the Preprocessor and the Analysis programs will be contained in the HEC-PBA User's Manual. The manual is expected to be published in the Fall of 1992. It will be available from the Hydrologic Engineering Center, Davis, California.

3.3. Program Operation

This section describes how the flood damage programs are operated. The process has been automated by using screens, macros and batch files to create a menu driven interface which makes it easy to use. The screens are shown in this section along with brief definitions of each command.

Screen 1 - Banner

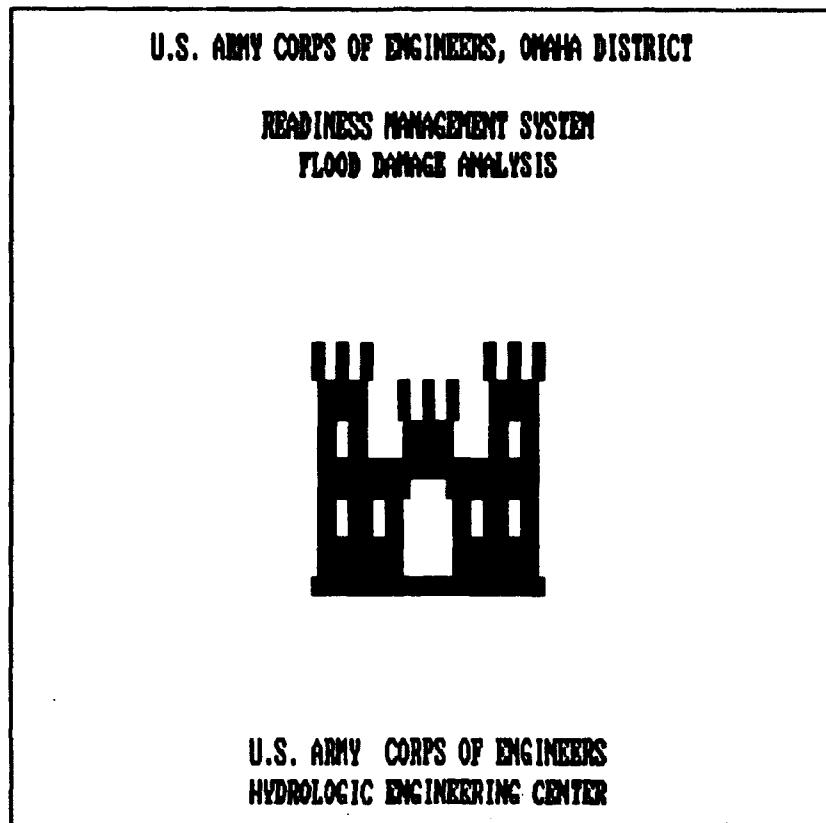


The following commands can be used with this screen:

<ENTER> - Continue to the next screen.

" X " - Exit the flood damage analysis.


Screen 2 - Flood Damage Program Choice

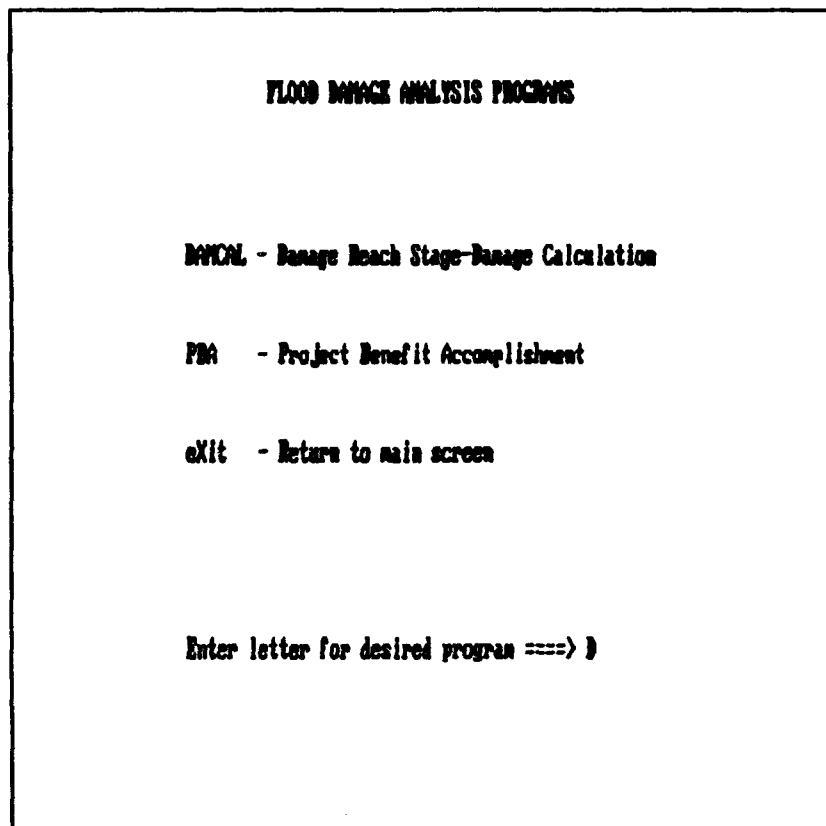

The following commands can be used with this screen:

- " D " - Choose the HEC-DAMCAL program options. From there the user is able to perform the operations necessary for executing the HEC-DAMCAL program.
- " P " - Choose the HEC-PBA program options. From there the user is able to perform the operations necessary for executing the HEC-PBA program.
- " X " - Exit to the Banner screen.


Screen 3 - Selections for executing the HEC-DAMCAL Program

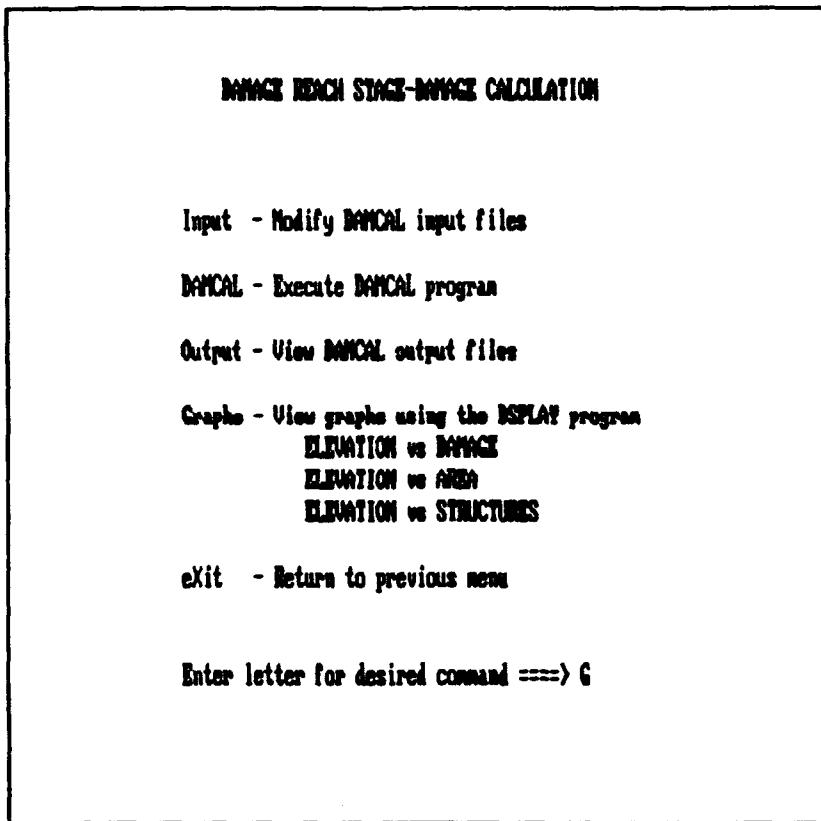

The following commands can be used with this screen:

- " I " - Allows the user to edit the input files for HEC-DAMCAL using the COED editor. The user chooses the input for urban areas or agricultural areas.
- " D " - Executes the HEC-DAMCAL program. The user chooses to compute urban damages or agricultural damages.
- " O " - Allows the user to view the HEC-DAMCAL output files using the LIST program. The user chooses to view output for urban areas or agricultural areas.
- " G " - Executes the DSPLAY program to allow the elevation-damage, area or structures relationships to be viewed graphically. The user must specify the river name, reach number, landuse type (URBAN or AGRICULTURAL) and landuse condition (EXISTING, FUTURE or MODIFIED). All entries must be UPPERCASE.
- " X " - Exits to the Program Selection screen.

Screen 4 - Selections for executing the HEC-PBA Program

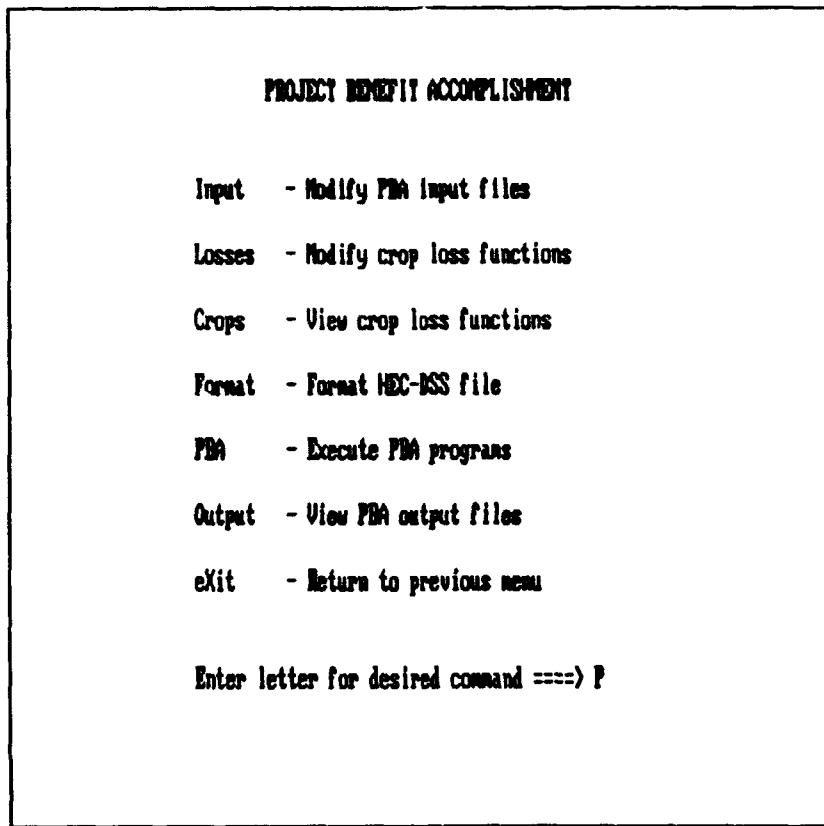

The following commands can be used with this screen:

- " I " - Allows the user to edit the HEC-PBA input files using the COED editor. The user must specify input for the Preprocessor program or input for the Analysis program.
- " L " - Allows the user to edit the crop loss functions using the DSSUTL program. New crop loss functions must be entered externally using the DSSPD program.
- " C " - Executes the DSPLAY program to allow crop loss functions to be viewed graphically. The user must specify the crop type. All entries must be UPPERCASE.
- " F " - Reformats the HEC-DSS file using HEC-MATHPK.
- " P " - Execute the HEC-PBA program. The user must choose the Preprocessor or Analysis program.
- " O " - Allows the user to view the HEC-PBA output files using the LIST program.
- " X " - Exits to the Program Selection screen.

3.4. Output Capabilities

There are two types of output from the flood damage computations. They are Damage Summary Reports and Graphical Displays. HEC-DAMCAL generates output in HEC-DSS format which can be viewed graphically. HEC-PBA provides only Damage Summary Reports.

(1) Damage Summary Reports. Both the HEC-DAMCAL and HEC-PBA programs provide summary reports. The reports can be viewed on the screen or printed out for documentation purposes.

The output from HEC-DAMCAL lists the stage-damage, elevation-damage, elevation-structures and elevation-area relationships in tabular form for all of the landuse categories and for each damage reach. The program also lists total the damage, structures flooded, and area flooded for single flood events if that option is used. The HEC-DAMCAL output tends to be lengthy because it restates many of the input definitions.

The output from HEC-PBA comes in two forms, the Preprocessor output and the Analysis output. Normally, once the Preprocessor output is verified, there is no need to generate another report unless some function or conditions change. The most meaningful output, in terms of summary reports, comes from the Analysis program. It lists the damage values for each damage reach, each damage categories (land-use) category, and each boundary specified. The Analysis output lists urban and agricultural damages separately. The program also defines damages throughout the range of elevations (zones) defined by the hydrographs for both with- and without-project conditions.

(2) Graphical Displays. Output from the HEC-DAMCAL program is best interpreted by viewing it graphically. The elevation-damage, area and structures flooded relationships can all be viewed using the DSPLAY program. Graphical displays are useful for detecting anomalies in the results. The DSPLAY program is limited to 7 curves per plot, and in some cases all of the damage categories (land use) categories cannot be viewed.

It is useful to view the crop loss functions used by HEC-PBA graphically. If these functions do not appear to be similar in form to the typical crop loss function, the HEC-PBA program will not provide meaningful results. The flood hydrographs can also be viewed to verify beginning and ending dates to be used in the analysis.

APPENDIX A
REFERENCES

APPENDIX A

REFERENCES

The following documents were used as references during the writing of this report. Most of the material in these documents was summarized in various ways with few if any word for word quotations. Therefore, footnotes were not used in the text to reference specific documents.

1. GRASS, Geographic Resources Analysis Support System, Version 4.0, User's Reference Manual, July 1991, U.S. Army Corps of Engineers, Construction Engineering Research Laboratory, Champaign, Illinois.
2. DAMCAL, Damage Reach Stage-Damage Calculation, User's Manual, February 1979, U.S. Army Corps of Engineers, Hydrologic Engineering Center, Davis, California.
3. HECDSS, User's Guide and Utility Program Manuals, December 1990, U.S. Army Corps of Engineers, Hydrologic Engineering Center, Davis, California.
4. COED, Corps of Engineers Editor, User's Manual, February 1987, U.S. Army Corps of Engineers, Hydrologic Engineering Center, Davis, California.
5. PREAD, Functions, Macros, Menus and Screens, User Information, September 1990, U.S. Army Corps of Engineers, Hydrologic Engineering Center, Davis, California.
6. PBA, Project Benefit Accomplishment Package, Draft User's Manual, October 1991, U.S. Army Corps of Engineers, Hydrologic Engineering Center, Davis, California.
7. PE&RS, Photogrammetric Engineering & Remote Sensing, Development of a Land-Cover Characteristics Database for the Conterminous U.S., November 1991, American Society for Photogrammetry and Remote Sensing.
8. South Dakota, Agricultural Statistics, Livestock • Crops • Prices, 1991-1992, South Dakota Agricultural Statistics Service, Sioux Falls, South Dakota.

APPENDIX B

STUDY EXAMPLE

APPENDIX B

STUDY EXAMPLE

Table of Contents

Section	Page
B-1. Study Description	27
B-2. Input Data	27
B-3. Output Data	28

APPENDIX B

STUDY EXAMPLE

B-1. Study Description

The study area includes all of the property from Oahe Dam to Big Bend Dam in South Dakota, that lies within the flood boundary that would result from failure of Oahe Dam. The sample data was developed at the Hydrologic Engineering Center (HEC) with the exception of the flood boundary, the original AVHRR data and the Digital Elevation Model (DEM), which were developed at the Omaha District office.

The flood event analyzed was based on a release of 200,000 cfs from Lake Oahe with a pool elevation of 1423 ft msl at Lake Sharpe. All of the damage reaches, as defined in Table 1, were analyzed with the exception of reaches 5, 14 and 15. These reaches were excluded because of a lack of data.

B-2. Input Data

(1) Economic data for Urban Areas

Economic input data generated using the GIS is shown in Appendix B Section 1. The original data file generated by GRASS is in a free format. A shell script titled "form" is used to reformat the data into a fixed format as shown in the Appendix. The user simply types:

```
form [Input filename] [Output filename] to reformat the data base file.
```

Structure and content values were estimated using little information. As stated in section III, it is essential that the landuse classification, including all of the necessary economic data, be verified by a qualified economist to ensure more accurate results. The data developed at HEC is intended to be used for test purposes only. The composite damage functions, which define the depth-damage relationships, for the urban land use categories described in Table 2 were obtained from the Economics Branch of Planning Division at the Omaha District office. The functions were modified to include depths greater than 10 feet by a simple linear extrapolation. The composite damage functions, structure and content values are listed in the HEC-DAMCAL input file in Appendix B Section 2 and summarized in the HEC-DAMCAL output file in Appendix B Section 3.

(2) Economic Data for Agricultural Areas

The South Dakota Agricultural Statistics Service and South Dakota State University were contacted to obtain information on crop planting dates, crop production statistics, harvest costs and market values. The information provided was based on the 1990-1991

crop year, and was used to develop all of the necessary data for flood damage computations.

Crop loss functions were developed based on the average planting and harvest dates for the study area. Crop densities were based on production statistics for each county. It was found that 87 percent of the entire area was comprised of combinations of wheat, corn oats and sorghum. Soybeans and sunflowers comprised the other 13 percent and were neglected in this analysis. The crop loss functions used in the analysis are shown with the HEC-PBA input in Appendix D Section 2.

Market statistics, crop prices and yields, for the crops mentioned above were based on average values for the entire state. Harvest costs were estimated based on information from the Agricultural Economics Department at South Dakota State University. Harvest costs were based on average fees charged by commercial harvester. Hauling fees were also included. The economic data for agricultural areas used in the analysis is listed in the HEC-PBA Preprocessor input file in Appendix C Section 1 and is summarized in the HEC-PBA Preprocessor output file in Appendix D Section 4.

(3) Flood Hydrographs

A simple triangular hydrograph with a peak stage of 1435 ft msl and a duration of 7 days was used to calculate damages in the cities of Pierre and Fort Pierre, as well as the agricultural areas upstream. Another simplified hydrograph with a peak stage of 1423 ft msl and a duration of 7 days was used to calculate damages for the agricultural areas around Lake Sharpe. The hydrographs are shown in Appendix D Section 3 with the input data for HEC-PBA.

B-3. Output Data

(1) Output from HEC-DAMCAL

Sample output from the HEC-DAMCAL program is shown in Appendix C Section 1. The report generated by the program is shown along with examples of the elevation-damage, elevation-area and elevation-structures flooded relationships. The plots shown in Appendix C Section 4 were generated using the DSPLAY program. The HEC-DAMCAL results were reviewed to confirm that the program is operating properly and writing the elevation relationships to HEC-DSS properly. The results were not thoroughly reviewed for accuracy because of the limitations in the accuracy of the input data.

(2) Output from HEC-PBA

Sample output from the HEC-PBA program is shown in Appendix D Section 4. The Preprocessor output summarizes all of the original input data from its input file and from HEC-DSS. The Preprocessor output does not list flood damage values. These are listed in the output from the HEC-PBA Analysis program. The Analysis output lists damages by reaches and specific boundaries. Damages are listed for agricultural areas and urban areas separately for both with- and without-project conditions. There is no graphical output from HEC-PBA.

The results from HEC-PBA were verified by comparison with output from HEC-DAMCAL for single flood events. The results were not reviewed for accuracy in terms of providing meaningful estimates of damages because of the inaccuracies in the input data. The program will provide more meaningful results when better data is used.

APPENDIX C
HEC-DAMCAL DATA

APPENDIX C

HEC-DAMCAL DATA

Table of Contents

Section	Page
C-1. GRASS Output	33
C-2. HEC-DAMCAL Input	41
C-3. HEC-DAMCAL Output	44
C-4. HEC-DSS Displays	63

Figures

C-1. Damage Reach Boundaries	35
C-2. Urban Landuse Pattern	36
C-3. Rural Landuse Pattern	37
C-4. Topographic Definition	38
C-5. Missouri River Reference Flood Elevations	39
C-6. Lake Sharpe Reference Flood Elevations	40
C-7. Damage Reach 1 Elevation - Area Relationships	64
C-8. Damage Reach 2 Elevation - Area Relationships	65
C-9. Damage Reach/Urban Categories Elevation - Damage Relationships	66
C-10. Damage Reach 3 Urban Categories Elevation - Number of Structures Relationships	67
C-11. Damage Reach 4 Urban Categories Elevation - Damage Relationships	68
C-12. Damage Reach 4 Urban Categories Elevation - Number of Structures Relationships	69
C-13. Damage Reach 6 Crop Elevation - Area Relationships	70
C-14. Damage Reach 7 Crop Elevation - Area Relationships	71
C-15. Damage Reach 8 Crop Elevation - Area Relationships	72
C-16. Damage Reach 9 Crop Elevation - Area Relationships	73
C-17. Damage Reach 10 Crop Elevation - Area Relationships	74
C-18. Damage Reach 11 Crop Elevation - Area Relationships	75
C-19. Damage Reach 12 Crop Elevation - Area Relationships	76
C-20. Damage Reach 13 Crop Elevation - Area Relationships	77

APPENDIX C

HEC-DAMCAL DATA

C-1. GRASS Output

Grid Cell Data Base File - Urban Areas

Column	Row	R	LU	GND	REFD	Column	Row	R	LU	GND	REFD
42	5	3	12	85	96.1	42	7	3	12	85	96.0
43	5	3	12	93	96.1	43	7	3	12	93	96.0
44	5	3	12	101	96.1	44	7	3	12	101	96.0
45	5	3	12	111	96.1	45	7	3	12	111	96.0
46	5	3	12	119	96.1	46	7	3	12	119	96.0
47	5	3	12	127	96.1	47	7	3	12	127	96.0
48	5	3	12	130	96.1	48	7	3	12	130	96.0
49	5	3	11	129	96.1	49	7	3	11	129	96.0
50	5	3	11	128	96.1	50	7	3	11	127	96.0
51	5	3	11	127	96.1	51	7	3	11	125	96.0
52	5	3	11	126	96.1	52	7	3	11	124	96.0
53	5	3	11	125	96.1	53	7	3	11	122	96.0
54	5	3	11	123	96.1	55	7	3	-1	119	96.0
55	5	3	11	122	96.1	59	7	3	11	121	96.1
56	5	3	11	121	96.1	60	7	3	11	127	96.1
57	5	3	11	120	96.1	61	7	3	-1	131	96.1
58	5	3	11	121	96.1	63	7	3	11	142	96.1
59	5	3	11	126	96.1	64	7	3	11	146	96.1
60	5	3	11	132	96.1	43	8	3	12	93	96.0
61	5	3	11	136	96.1	44	8	3	12	101	96.0
62	5	3	11	140	96.1	45	8	3	12	111	96.0
63	5	3	11	146	96.1	46	8	3	12	119	96.0
64	5	3	11	151	96.1	47	8	3	12	127	96.0
65	5	3	11	155	96.1	48	8	3	12	130	96.0
66	5	3	11	160	96.1	49	8	3	12	128	96.0
67	5	3	-1	165	96.1	50	8	3	11	127	96.0
42	6	3	12	85	96.1	51	8	3	11	124	96.0
43	6	3	12	93	96.1	59	8	3	11	119	96.1
44	6	3	12	101	96.1	60	8	3	11	125	96.1
45	6	3	12	111	96.1	61	8	3	11	129	96.1
46	6	3	12	119	96.1	43	9	3	12	93	96.0
47	6	3	12	127	96.1	44	9	3	12	101	96.0
48	6	3	12	130	96.1	45	9	3	12	111	96.0
49	6	3	11	129	96.1	46	9	3	12	119	96.0
50	6	3	11	128	96.1	47	9	3	12	127	96.0
51	6	3	11	126	96.1	48	9	3	12	130	96.0
52	6	3	11	125	96.1	49	9	3	12	128	96.0
53	6	3	11	123	96.1	50	9	3	11	126	96.0
54	6	3	11	122	96.1	51	9	3	11	124	96.0
55	6	3	11	120	96.1	52	9	3	11	122	96.0
56	6	3	11	119	96.1	53	9	3	11	120	96.0
57	6	3	11	117	96.1	60	9	3	11	123	96.1
58	6	3	11	119	96.1	61	9	3	-1	127	96.1
59	6	3	11	123	96.1	43	10	3	12	93	96.0
60	6	3	11	129	96.1
62	6	3	11	138	96.1
63	6	3	11	144	96.1
64	6	3	11	148	96.1	196	125	3	12	42	89.6
66	6	3	11	157	96.1	197	125	3	12	42	89.6
67	6	3	11	163	96.0	9999	99999	99	99	999	999.9

Grid Cell Data Base - Rural Areas

Column	Row	R	LU	GND	REFD	Column	Row	R	LU	GND	REFD
281	7	1	3	181	-1.0	269	12	1	3	168	210.0
275	8	1	3	181	210.0	270	12	1	3	171	210.0
276	8	1	3	181	210.0	271	12	1	3	173	210.0
277	8	1	3	181	210.0	272	12	1	3	175	210.0
278	8	1	3	181	210.0	273	12	1	3	177	210.0
279	8	1	3	181	210.0	274	12	1	3	179	210.0
280	8	1	3	181	210.0	275	12	1	3	181	210.0
281	8	1	3	181	210.0	276	12	1	3	181	210.0
282	8	1	3	181	210.0	277	12	1	3	181	210.0
283	8	1	3	181	210.0	278	12	1	3	181	210.0
284	8	1	3	181	210.0	279	12	1	3	181	210.0
273	9	1	4	179	210.0	280	12	1	3	181	210.0
274	9	1	4	180	210.0	281	12	1	3	181	210.0
275	9	1	3	181	210.0	282	12	1	3	181	210.0
276	9	1	3	181	210.0	283	12	1	3	181	210.0
277	9	1	3	181	210.0	284	12	1	3	181	210.0
278	9	1	3	181	210.0	285	12	1	3	181	210.0
279	9	1	3	181	210.0	286	12	1	3	181	210.0
280	9	1	3	181	210.0	266	13	1	3	160	210.0
281	9	1	3	181	210.0	267	13	1	3	162	210.0
282	9	1	3	181	210.0	268	13	1	3	164	210.0
283	9	1	3	181	210.0	269	13	1	3	166	210.0
284	9	1	3	181	210.0	270	13	1	3	169	210.0
270	10	1	4	175	210.0	271	13	1	3	172	210.0
271	10	1	4	176	210.0	272	13	1	3	174	210.0
272	10	1	4	177	210.0	273	13	1	3	177	210.0
273	10	1	4	179	210.0	274	13	1	3	179	210.0
274	10	1	4	180	210.0	275	13	1	3	181	210.0
275	10	1	3	181	210.0	276	13	1	3	181	210.0
276	10	1	3	181	210.0	277	13	1	3	181	210.0
277	10	1	3	181	210.0	278	13	1	3	181	210.0
278	10	1	3	181	210.0	279	13	1	3	181	210.0
279	10	1	3	181	210.0	280	13	1	3	181	210.0
280	10	1	3	181	210.0	281	13	1	3	181	210.0
281	10	1	3	181	210.0	282	13	1	3	181	210.0
282	10	1	3	181	210.0	283	13	1	3	181	210.0
283	10	1	3	181	210.0	284	13	1	3	181	210.0
284	10	1	3	181	210.0	285	13	1	3	181	210.0
285	10	1	3	181	210.0	286	13	1	3	181	210.0
286	10	1	-1	-1	-1.0	283	14	2	-1	-1	-1.0
268	11	1	4	170	210.0	264	14	2	3	152	210.0
269	11	1	4	171	210.0	265	14	2	3	155	210.0
270	11	1	4	173	210.0	266	14	1	3	157	210.0
271	11	1	4	175	210.0	267	14	1	3	159	210.0
272	11	1	4	177	210.0	268	14	1	3	162	210.0
273	11	1	4	178	210.0	269	14	1	3	164	210.0
274	11	1	4	180	210.0	270	14	1	3	168	210.0
275	11	1	3	181	210.0	271	14	1	3	171	210.0
276	11	1	3	181	210.0	272	14	1	3	173	210.0
277	11	1	3	181	210.0	273	14	1	3	176	210.0
278	11	1	3	181	210.0	274	14	1	3	178	210.0
279	11	1	3	181	210.0	275	14	1	3	181	210.0
280	11	1	3	181	210.0	276	14	1	3	181	210.0
281	11	1	3	181	210.0	277	14	1	3	181	210.0
282	11	1	3	181	210.0
283	11	1	3	181	210.0
284	11	1	3	181	210.0
285	11	1	3	181	210.0
286	11	1	3	181	210.0	1077	807	11	1	181	150.0
267	12	1	3	165	210.0	1339	807	11	1	181	150.0
268	12	1	3	167	210.0	99999	99999	99	99	999	999.9

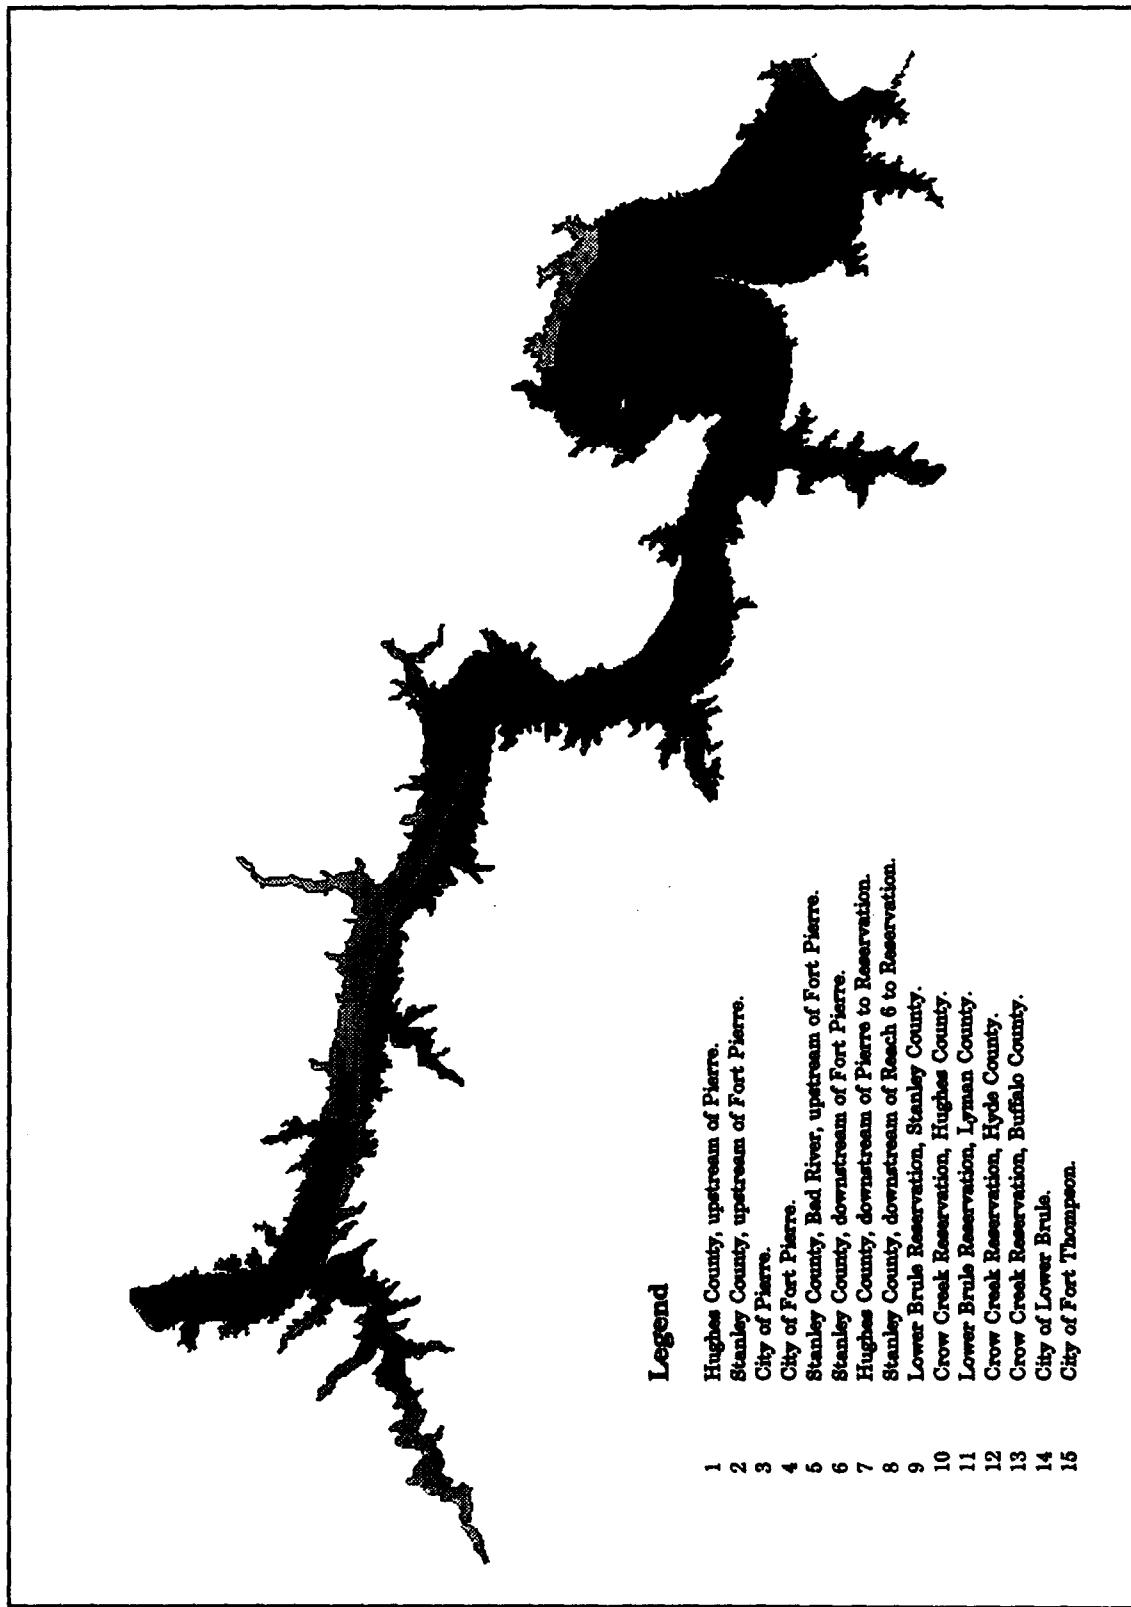


FIGURE C-1. Damage Reach Boundaries

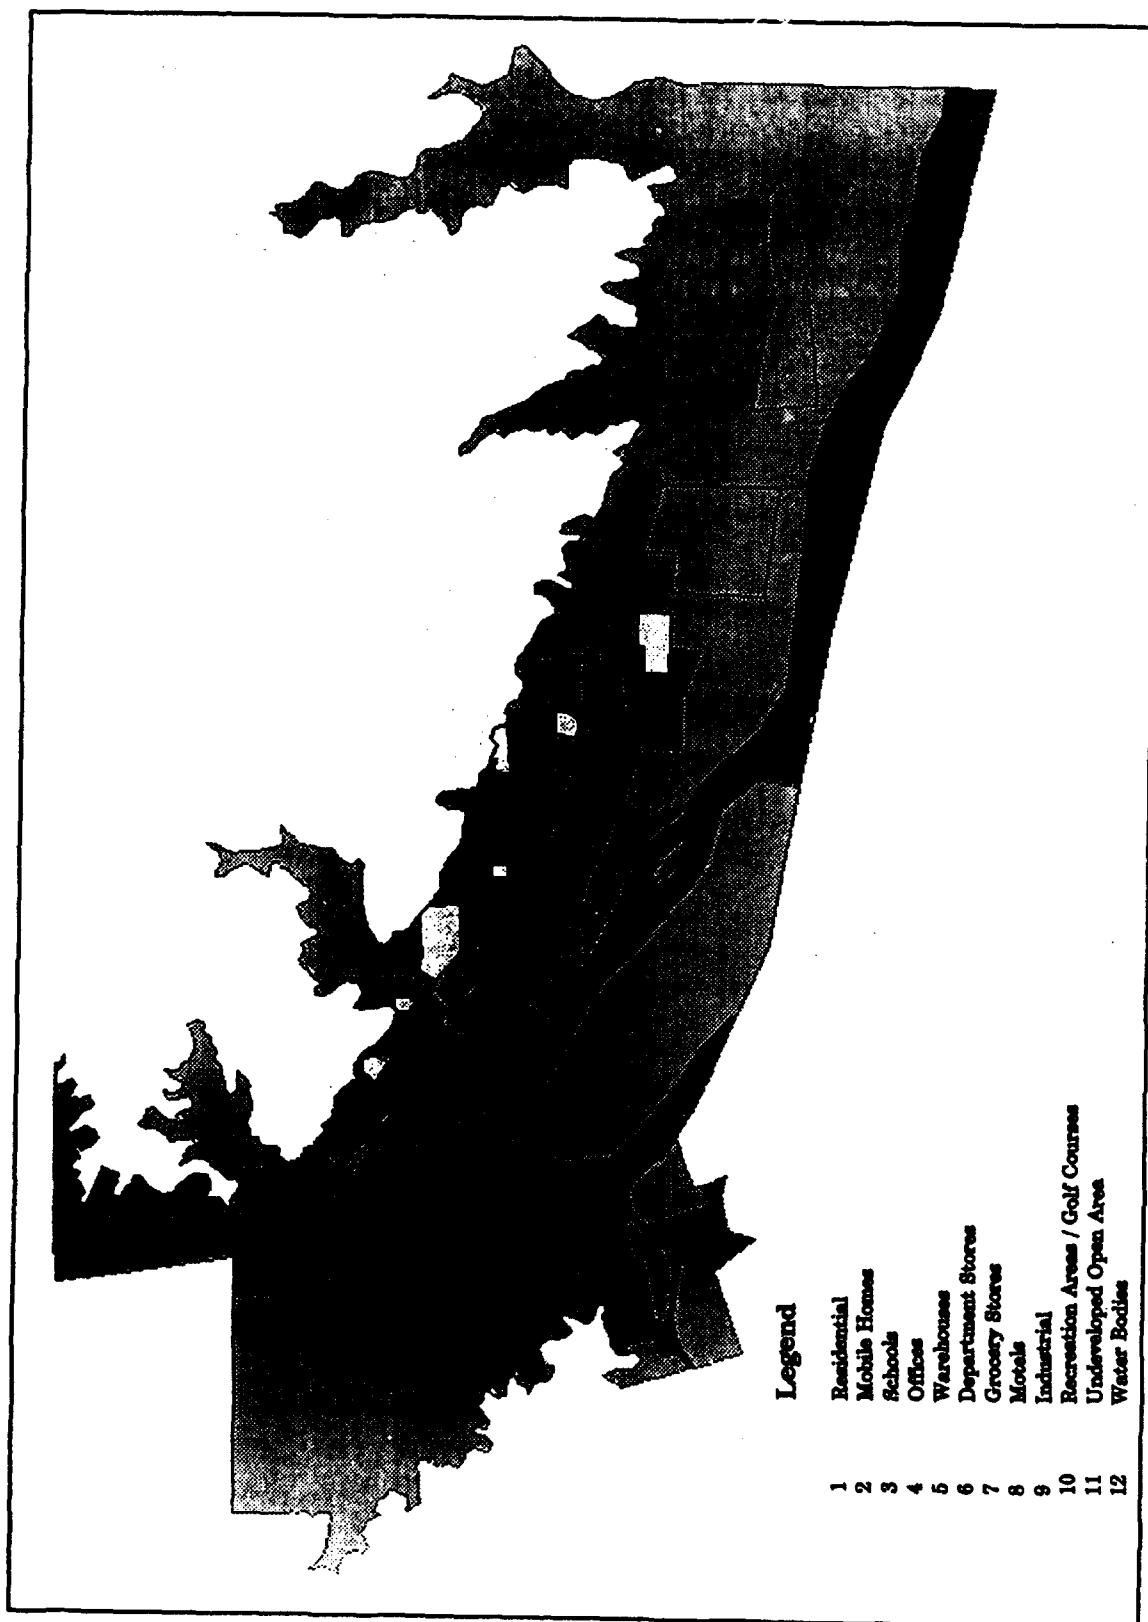


FIGURE C-2. Urban Landuse Pattern

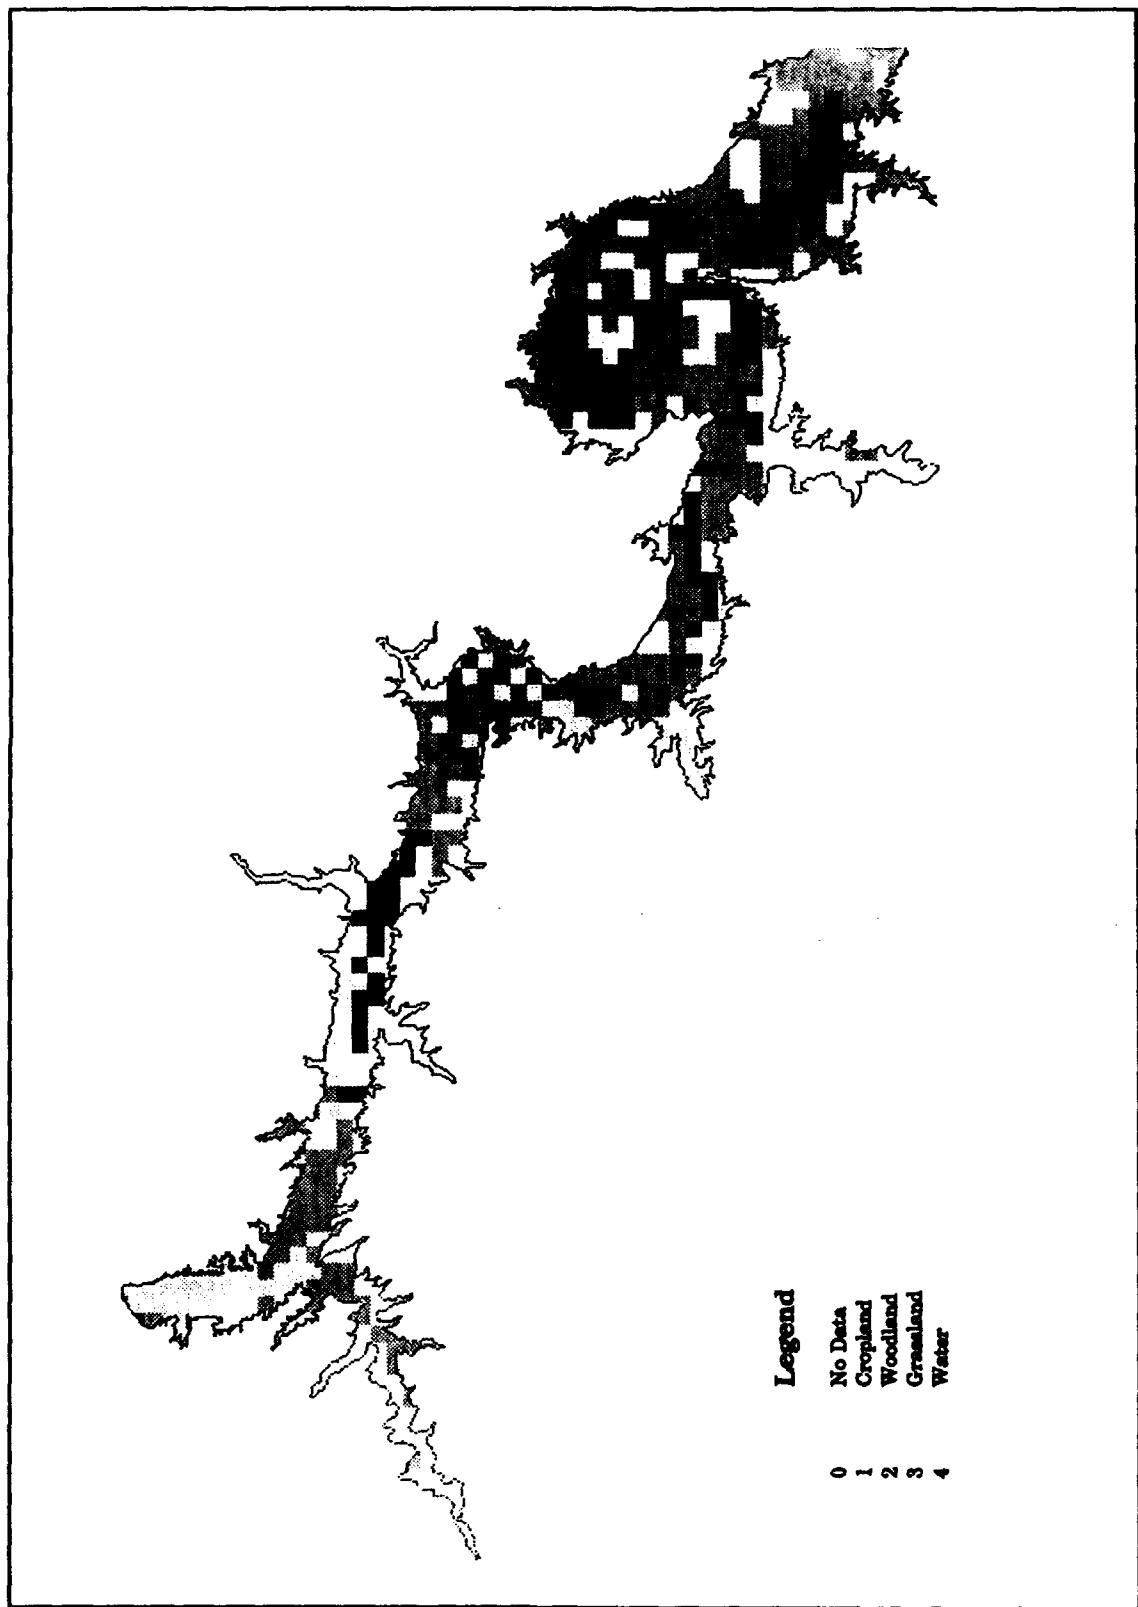


FIGURE C-3. Rural Landuse Pattern

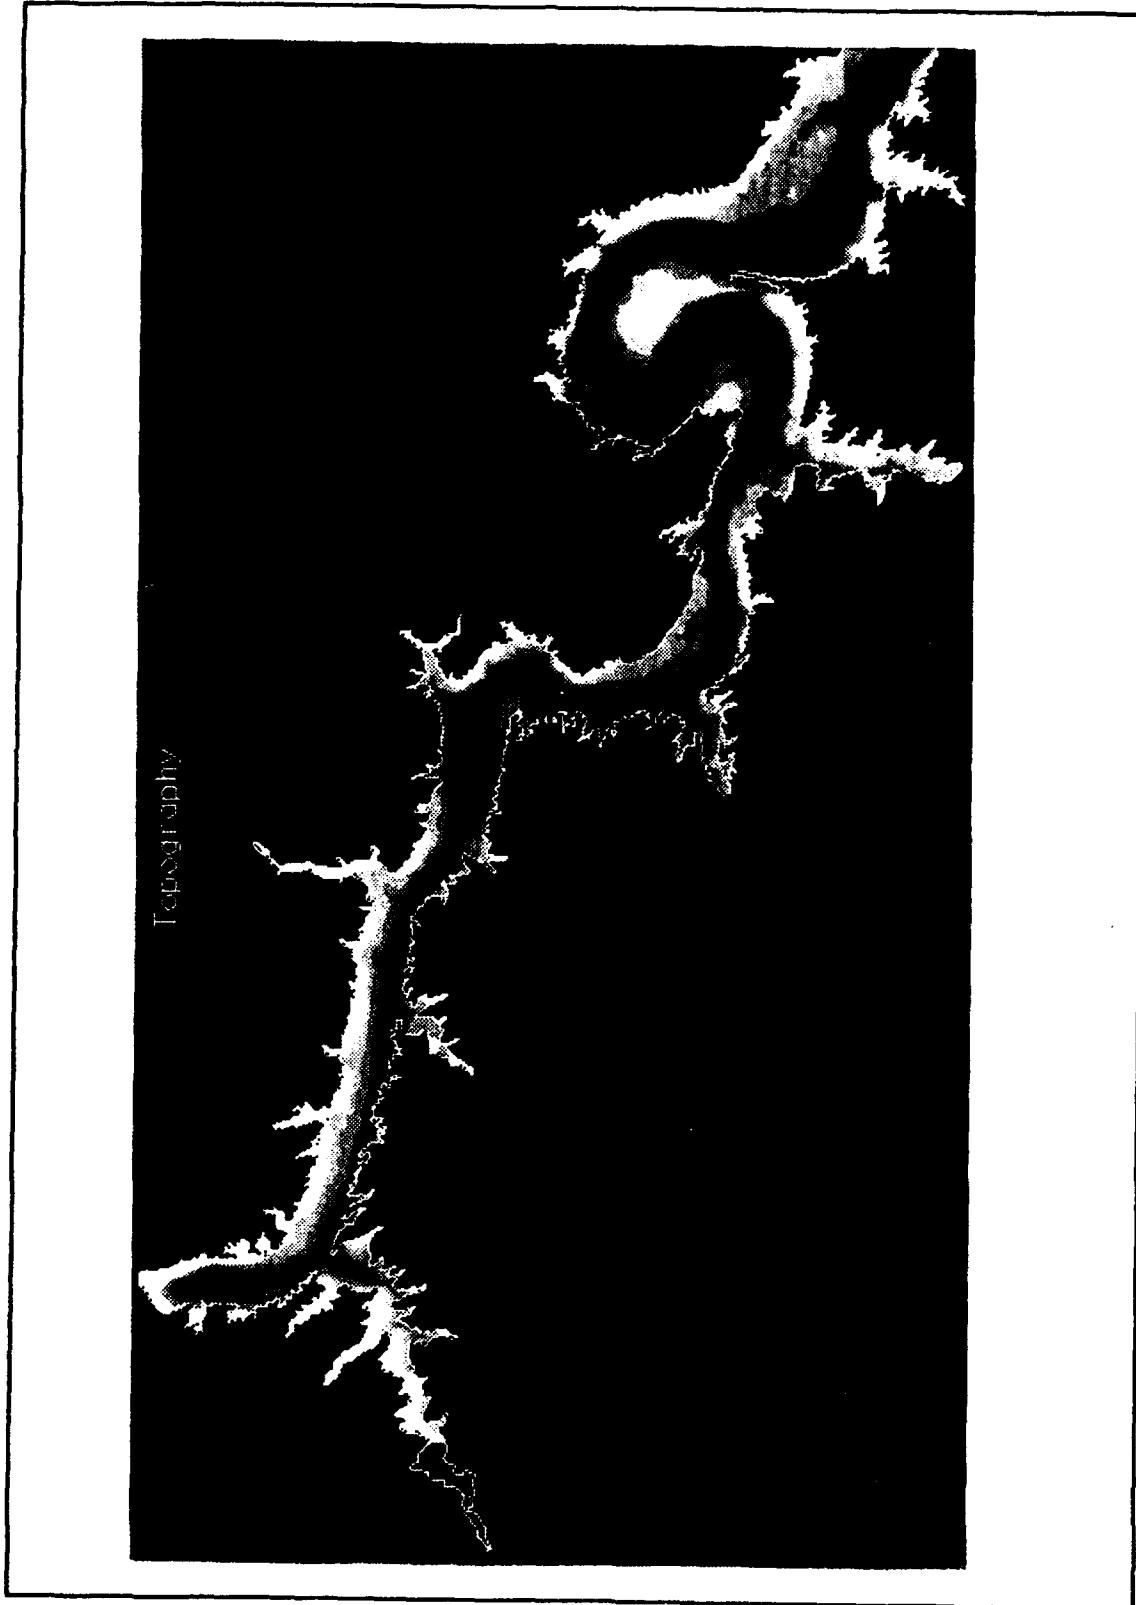


FIGURE C-4. Topographic Definition

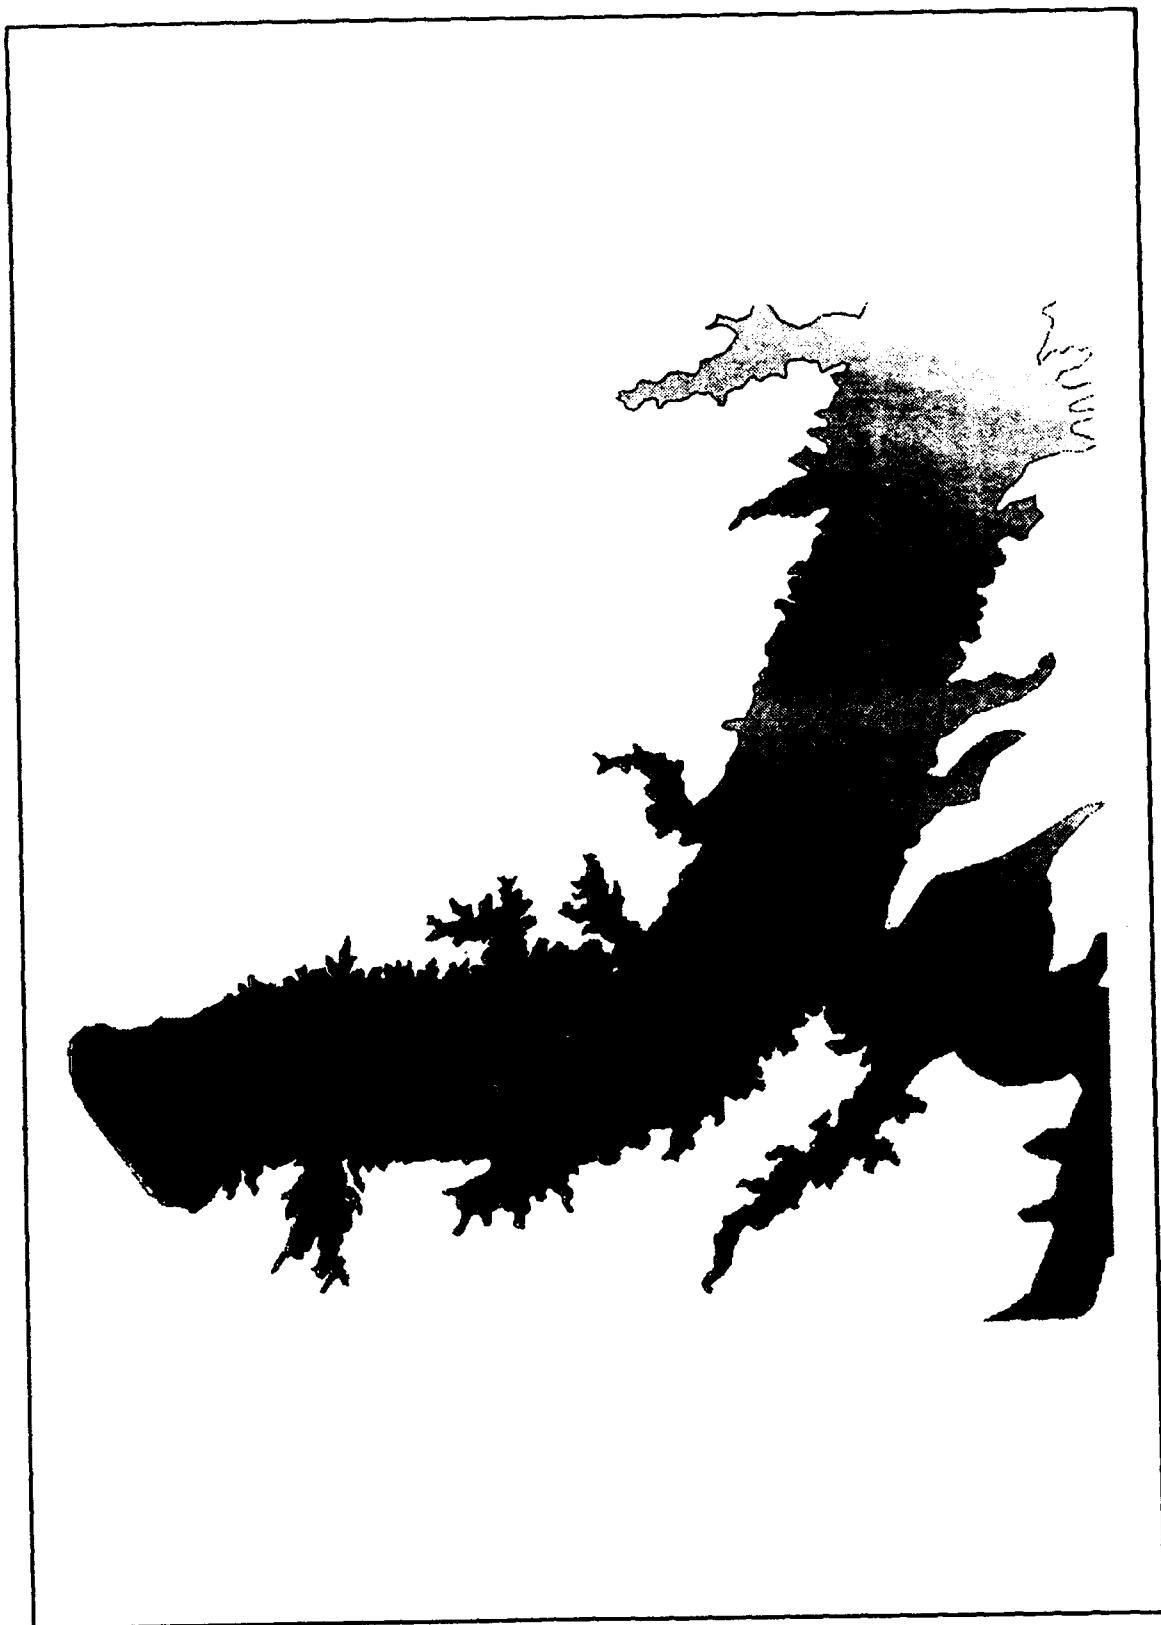


FIGURE C-5. Missouri River Reference Flood Elevations

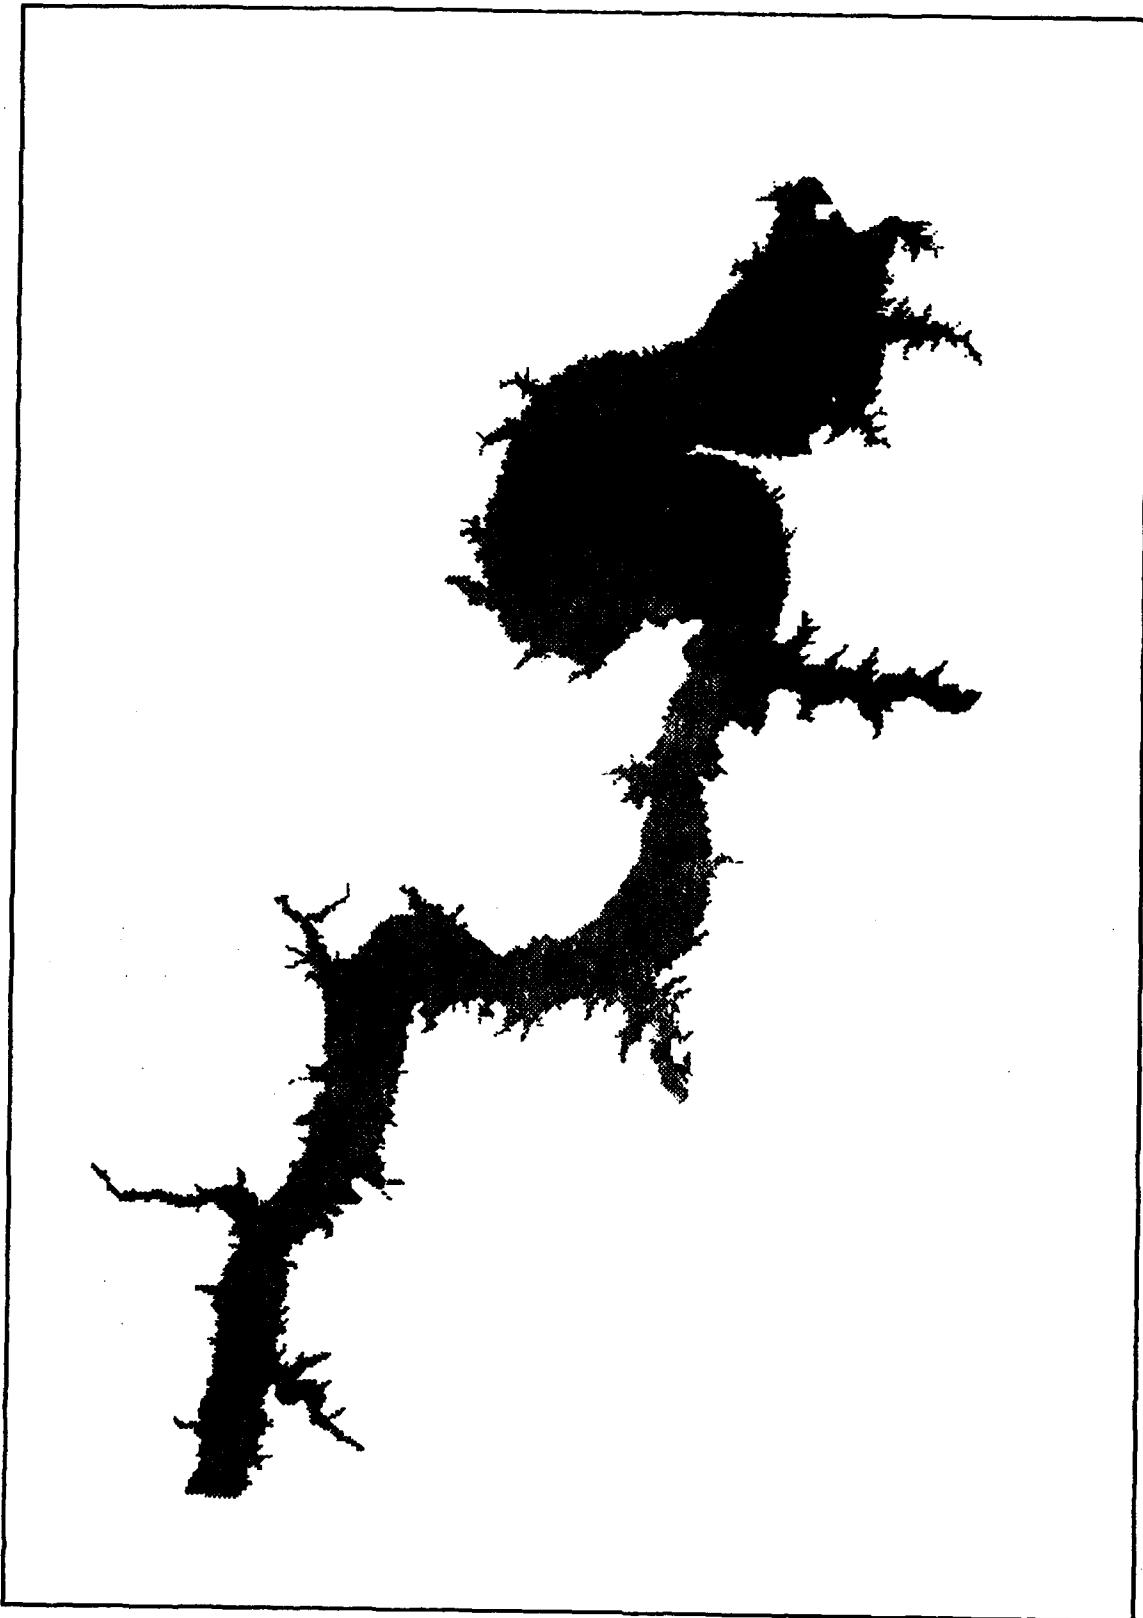


FIGURE C-6. Lake Sharpe Reference Flood Elevations

APPENDIX C

C-2. HEC-DAMCAL Input

Input Data for Reach 3 (Pierre) and Reach 4 (Fort Pierre)

T1 DAMCAL Input File - Urban areas
T2 Pierre, SD - Resolution = 64m (1 acre)
T3 Reference flood: 200,000 cfs, 1423 pool

J1	0	0	0	0	0	0	6	1
J2	1	1	6	204	128	1		
J3	3	2	4	0	12	5	6	18 -1.00
ZW	A=MISSOURI	E=1992	F=URBAN-EXISTING					
FT	(F5.0,F6.0,2F3.0,F4.0,F6.0)							
ST	10 YR	50 YR	100 YR	500 YR	200K	400K		
LU	1	1	1.5	50000	-.50	-1	1.00	10 0 1
LT	1	3	RESIDENTIAL					
DF	0	1	2	3	4	5	8	10 100 200
DS	7	14	21	27	31	36	48	57 75 99
DC	0	36	47	53	57	60	66	78 99 99
DO	0	5	5	5	5	5	5	5 5 5
LU	2	1	3.0	10000	-.70	-1	1.00	10 0 1
LT	2	3	MOBILE HOMES					
DF	0	1	2	3	4	5	8	10 100 200
DS	15	20	31	44	60	74	94	96 98 99
DC	0	51	76	85	89	92	95	96 97 98
DO	0	5	5	5	5	5	5	5 5 5
LU	3	1	0.3	1500000	-.15	-1	1.00	10 0 2
LT	3	2	SCHOOLS					
DF	0	1	2	3	4	5	8	10 100 200
DS	0	8	12	15	15	16	22	28 50 75
DC	0	18	26	30	33	35	50	66 89 99
DO	0	5	5	5	5	5	5	5 5 5
LU	4	1	0.5	500000	-.30	-1	1.00	10 0 2
LT	4	2	OFFICES					
DF	0	1	2	3	4	5	8	10 100 200
DS	0	12	14	17	19	23	35	45 75 99
DC	0	16	21	24	25	26	36	50 99 99
DO	0	5	5	5	5	5	5	5 5 5
LU	5	1	.25	250000	-1.00	-1	1.00	10 0 3
LT	5	1	WAREHOUSES					
DF	0	1	2	3	4	5	8	10 100 200
DS	0	1	1	1	1	3	12	21 50 75
DC	0	11	16	19	21	23	47	99 99 99
DO	0	5	5	5	5	5	5	5 5 5
LU	6	1	.25	500000	-1.00	-1	1.00	10 0 3
LT	6	2	DEPARTMENT STORES					
DF	0	1	2	3	4	5	8	10 100 200
DS	0	3	7	7	7	9	17	23 50 75
DC	0	18	33	65	88	95	99	99 99 99
DO	0	5	5	5	5	5	5	5 5 5
LU	7	1	.50	300000	-1.50	-1	1.00	10 0 3
LT	7	2	GROCERY STORES					
DF	0	1	2	3	4	5	8	10 100 200
DS	0	3	4	5	6	7	20	37 50 75
DC	0	50	99	99	99	99	99	99 99 99
DO	0	5	5	5	5	5	5	5 5 5
LU	8	1	.50	750000	-.50	-1	1.00	10 0 3
LT	8	2	MOTELS					
DF	0	1	2	3	4	5	8	10 100 200
DS	0	4	7	10	12	15	26	37 50 75
DC	0	10	16	21	25	30	52	76 99 99
DO	0	5	5	5	5	5	5	5 5 5
LU	9	1	.50	1000000	-.50	-1	1.00	10 0 4
LT	9	2	INDUSTRIAL					
DF	0	1	2	3	4	5	8	10 100 200
DS	0	1	1	1	1	3	12	21 50 75
DC	0	11	16	19	21	23	47	99 99 99
DO	0	5	5	5	5	5	5	5 5 5
LU	10	0	0.10	0	0	0	1.00	10 0 5
LT	10	0	RECREATION AREAS					
DF	0	1	2	3	4	5	8	10 100 200
DO	0	.50	1.00	1.50	2.00	2.00	2.00	2.00 2.00 2.00
LU	11	0	0	0	0	1.00	2	0 0 5

LT	11	0	OPEN SPACE
DF	0	200	
DD	0	0.50	
LU	12	0	
LT	12	0	WATER BODIES
DF	0	200	
DD	0	0	
DR	3	94.9	
DT RCH 3 CITY OF PIERRE		0	
SE	87.0	87.5	87.8
DR	4	94.9	88.6
DT RCH 4 CITY OF FORT PIERRE		0	94.9
SE	43.5	43.8	43.9
			44.3
			47.5
			51.1
END			

Input Data for Reaches 1, 2, 6, 7, 8, 9, 10, 11, 12 & 13

```

T1          DAMCAL input file - Agricultural areas
T2          Oahe Dam to Big Bend Dam - Resolution = 64m (1 acre)
T3          Reference flood = 150.0 (1490 ft msl)
J1          0      0      0      0      0      0      0      1      1
J2          1      1      6     1484     816      1
J3          3     10      4      0      4      5      6     18    1.00
ZW A=MISSOURI E=1992 F=AG-EXISTING
FT(F5.0,F6.0,2F3.0,F4.0,F6.1)
ST 200K
LU 1      0      1.00      0      0      0      1.00      6      0
LT 1      0      CROPLAND
DF 0      10      50     100     150     200
DD 0      100     100     100     100     100
LU 2      0      1.00      0      0      0      1.00      6      0
LT 2      0      WOODLAND
DF 0      10      50     100     150     200
DD 0      5       5       5       5       5
LU 3      0      1.00      0      0      0      1.00      6      0
LT 3      0      GRASSLAND
DF 0      10      50     100     150     200
DD 0      1       1       1       1       1
LU 4      0      1.00      0      0      0      1.00      6      0
LT 4      0      WATER
DF 0      10      50     100     150     200
DD 0      0       0       0       0       0
OR 1      210     0       0       0       0      10.00      0      0
DT RCH 1 HUGHES COUNTY
SE 95
DR 2      210     0       0       0       0      10.00      0      0
DT RCH 2 STANLEY COUNTY
SE 95
DR 6      210     0       0       0       0      10.00      0      0
DT RCH 6 STANLEY COUNTY
SE 95
DR 7      150     0       0       0       0      10.00      0      0
DT RCH 7 HUGHES COUNTY
SE 83
DR 8      150     0       0       0       0      10.00      0      0
DT RCH 8 STANLEY COUNTY
SE 83
DR 9      150     0       0       0       0      10.00      0      0
DT RCH 9 LOWER BRULE RESERVATION, STANLEY COUNTY
SE 83
DR 10     150     0       0       0       0      10.00      0      0
DTRCH 10 CROW CREEK RESERVATION, HUGHES COUNTY
SE 83
DR 11     150     0       0       0       0      10.00      0      0
DTRCH 11 LOWER BRULE RESERVATION, LYMAN COUNTY
SE 83
DR 12     150     0       0       0       0      10.00      0      0
DTRCH 12 CROW CREEK RESERVATION, HYDE COUNTY
SE 83
DR 13     150     0       0       0       0      10.00      0      0
DTRCH 13 CROW CREEK RESERVATION, BUFFALO COUNTY
SE 83
END

```

C-3. HEC-DAMCAL Output

Output Data for Reach 3 (Pierre) and Reach 4 (Fort Pierre)

```
*****  
* Damage Reach Stage-Damage Calculation Program *  
* Users Manual February 1979 *  
* Version 2.0.13; July 1992 *  
* IBM-PC Compatible (MS) *  
* Run date 24JUL92 time 09:51:50 *  
*****
```

DDDDD	A	M	M	CCCCC	A	L
D D	A A	MM	MM	C C	A A	L
D D	A A	M M	M M	C	A A	L
D D	AAAAAA	M M	M M	C	AAAAAA	L
D D	A A	M	M	C	A A	L
D D	A A	M	M	C C	A A	L
DDDDD	A	A	M	CCCCC	A	LLLLLL

```
*****  
* U.S. Army Corps of Engineers *  
* The Hydrologic Engineering Center *  
* 609 Second Street, Suite 8 *  
* Davis, California 95616 *  
* (916) 756-1104 *  
*****
```

ANALYSIS INFORMATION

IPOL = 0, THERE IS NO POLICY CONTROL IN THIS RUN
IPROF = 0, THERE IS NO FLOOD PROOFING IN THIS RUN
IEVAC = 0, THERE IS NO PERMANENT EVACUATION IN THIS RUN
IEVCLU = 0, THERE IS NO PERMANENT EVACUATION IN THIS RUN
IPRINT = 0, NORMAL PRINTOUT
ITRACE = 0, NO TRACE OUTPUT WILL BE DISPLAYED
ITYPE = 0, NUMBER OF SINGLE EVENT DAMAGES TO BE CALCULATED
IAQ = 1, AGGREGATE SINGLE EVENT DAMAGES

DATA BANK INFORMATION

NFILE = 1, THE DATA BANK IS ON THIS COMPUTER UNIT
NFORM = 1, THE DATA BANK IS FORMATTED
NDV = 8, THE NUMBER OF DATA VARIABLES
IROW = 204, THE NUMBER OF ROWS IN THE DATA BANK
ICOL = 128, THE NUMBER OF COLUMNS IN THE DATA BANK
IMAGE = 1, PRINTED IMAGE OF INPUT DECK

DATA VARIABLE INFORMATION

IDAMRC = 3, THE DATA VARIABLE THAT IS THE DAMAGE REACH CODE
NOOR = 2, THE NUMBER OF DAMAGE REACHES IN THIS ANALYSIS
ILAND = 4, THE DATA VARIABLE THAT IS THE LAND USE ANALYZED
NOLUC = 12, THE NUMBER OF LAND USE CATEGORIES
ITOPO = 5, THE DATA VARIABLE THAT IS TOPOGRAPHY
IRFFD = 6, THE DATA VARIABLE THAT IS THE REFERENCE FLOOD ELEVATION
IELV = 18, THE NUMBER OF ELEVATION-DAMAGE POINTS TO BE CALCULATED
GSIZE = -1., AN ELEVATION-STRUCTURES FLOODED TABLE WILL BE PRINTED

FILE SYSTEM INFORMATION - A FILE WILL BE CREATED TO PASS DEPTH-AREA DATA TO OTHER HEC PROGRAMS USING THE HEC DATA STORAGE SYSTEM (HECDSS).

PROJ = MISSOURI
ALT = URBAN-EXISTING
YEAR = 1992

LAND USE CATEGORY 1 DAMAGE CATEGORY NO. 1
 AGGREGATED LAND USE CATEGORY NO. = 1

RESIDENTIAL

STAGE	STAGE	PERCENT	PERCENT	PERCENT	AMOUNT OF DAMAGE
FROM 1ST	ADJUSTED	DAMAGE	DAMAGE	DAMAGE	PER GRID CELL
FLOOR		STRUCTURE	CONTENTS	OTHER	IN THOUSAND DOLLARS
0.00	3.00	7.00	0.00	0.00	5.20
1.00	4.00	14.00	36.00	5.00	26.20
2.00	5.00	21.00	47.00	5.00	36.04
3.00	6.00	27.00	53.00	5.00	42.13
4.00	7.00	31.00	67.00	5.00	46.96
5.00	8.00	36.00	80.00	5.00	51.96
6.00	11.00	48.00	86.00	5.00	63.79
7.00	13.00	57.00	78.00	5.00	75.80
10.00	103.00	78.00	98.00	5.00	98.04
200.00	203.00	98.00	99.00	5.00	118.94

DENSITY OF THE LAND USE UNITS PER GRID CELL = 1.50

BASE VALUE OF THE STRUCTURE = 50000.00
 BASE VALUE OF THE CONTENTS (50.00 PERCENT OF THE STRUCTURE VALUE) = 25000.00
 TOTAL DAMAGE OF OTHER WILL BE THE RESPECTIVE PECENTAGE OF THE TOTAL
 VACANCY FACTOR (PERCENT DEVELOPED) =100.0
 STRUCTURE FIRST FLOOR ADJUSTMENT RELATIVE TO GROUND LEVEL = 3.00

LAND USE CATEGORY 2 DAMAGE CATEGORY NO. 2

AGGREGATED LAND USE CATEGORY NO. = 1

MOBILE HOMES

STAGE	STAGE	PERCENT	PERCENT	PERCENT	AMOUNT OF DAMAGE
FROM 1ST	ADJUSTED	DAMAGE	DAMAGE	DAMAGE	PER GRID CELL
FLOOR		STRUCTURE	CONTENTS	OTHER	IN THOUSAND DOLLARS
0.00	3.00	15.00	0.00	0.00	4.50
1.00	4.00	20.00	51.00	5.00	17.55
2.00	5.00	31.00	76.00	5.00	26.52
3.00	6.00	44.00	85.00	5.00	32.80
4.00	7.00	50.00	89.00	5.00	38.52
5.00	8.00	74.00	92.00	5.00	43.80
8.00	11.00	94.00	95.00	5.00	50.56
10.00	13.00	98.00	98.00	5.00	51.41
100.00	108.00	98.00	97.00	5.00	52.26
200.00	203.00	98.00	98.00	5.00	52.79

DENSITY OF THE LAND USE UNITS PER GRID CELL = 3.00

BASE VALUE OF THE STRUCTURE = 10000.00
 BASE VALUE OF THE CONTENTS (70.00 PERCENT OF THE STRUCTURE VALUE) = 7000.00
 TOTAL DAMAGE OF OTHER WILL BE THE RESPECTIVE PECENTAGE OF THE TOTAL
 VACANCY FACTOR (PERCENT DEVELOPED) =100.0
 STRUCTURE FIRST FLOOR ADJUSTMENT RELATIVE TO GROUND LEVEL = 3.00

LAND USE CATEGORY 3 DAMAGE CATEGORY NO. 3

AGGREGATED LAND USE CATEGORY NO. = 2

SCHOOLS

STAGE	STAGE	PERCENT	PERCENT	PERCENT	AMOUNT OF DAMAGE
FROM 1ST	ADJUSTED	DAMAGE	DAMAGE	DAMAGE	PER GRID CELL
FLOOR		STRUCTURE	CONTENTS	OTHER	IN THOUSAND DOLLARS
0.00	2.00	0.00	0.00	0.00	0.00
1.00	3.00	6.00	18.00	5.00	50.56
2.00	4.00	12.00	28.00	5.00	75.13
3.00	5.00	18.00	36.00	5.00	92.14
4.00	6.00	15.00	33.00	5.00	84.28
5.00	7.00	18.00	35.00	5.00	100.41
8.00	10.00	22.00	50.00	5.00	139.39
10.00	12.00	28.00	68.00	5.00	179.08
100.00	102.00	50.00	99.00	5.00	306.42
200.00	202.00	75.00	99.00	5.00	424.54

DENSITY OF THE LAND USE UNITS PER GRID CELL = 0.30

BASE VALUE OF THE STRUCTURE =*****
 BASE VALUE OF THE CONTENTS (15.00 PERCENT OF THE STRUCTURE VALUE) = 225000.02
 TOTAL DAMAGE OF OTHER WILL BE THE RESPECTIVE PECENTAGE OF THE TOTAL
 VACANCY FACTOR (PERCENT DEVELOPED) =100.0
 STRUCTURE FIRST FLOOR ADJUSTMENT RELATIVE TO GROUND LEVEL = 2.00

LAND USE CATEGORY 4 DAMAGE CATEGORY NO. 4

AGGREGATED LAND USE CATEGORY NO. = 2

OFFICES

STAGE FROM 1ST FLOOR	STAGE ADJUSTED	PERCENT STRUCTURE	PERCENT CONTENTS	PERCENT OTHER	AMOUNT OF DAMAGE PER GRID CELL IN THOUSAND DOLLARS
0.00	2.00	0.00	0.00	0.00	0.00
1.00	3.00	12.00	16.00	5.00	44.10
2.00	4.00	14.00	21.00	5.00	53.20
3.00	5.00	17.00	24.00	5.00	63.33
4.00	6.00	19.00	26.00	5.00	66.56
5.00	7.00	23.00	26.00	5.00	80.86
8.00	10.00	36.00	36.00	5.00	120.23
10.00	12.00	45.00	50.00	5.00	157.50
100.00	102.00	76.00	98.00	5.00	274.84
200.00	202.00	99.00	98.00	5.00	337.84

DENSITY OF THE LAND USE UNITS PER GRID CELL = 0.50

BASE VALUE OF THE STRUCTURE = 600000.00

BASE VALUE OF THE CONTENTS (30.00 PERCENT OF THE STRUCTURE VALUE) = 180000.00

TOTAL DAMAGE OF OTHER WILL BE THE RESPECTIVE PERCENTAGE OF THE TOTAL

VACANCY FACTOR (PERCENT DEVELOPED) = 100.0

STRUCTURE FIRST FLOOR ADJUSTMENT RELATIVE TO GROUND LEVEL = 2.00

LAND USE CATEGORY 5 DAMAGE CATEGORY NO. 5

AGGREGATED LAND USE CATEGORY NO. = 3

WAREHOUSES

STAGE FROM 1ST FLOOR	STAGE ADJUSTED	PERCENT STRUCTURE	PERCENT CONTENTS	PERCENT OTHER	AMOUNT OF DAMAGE PER GRID CELL IN THOUSAND DOLLARS
0.00	1.00	0.00	0.00	0.00	0.00
1.00	2.00	1.00	11.00	5.00	7.98
2.00	3.00	1.00	16.00	5.00	11.18
3.00	4.00	1.00	18.00	5.00	13.13
4.00	5.00	1.00	21.00	5.00	14.44
5.00	6.00	3.00	23.00	5.00	17.08
8.00	9.00	12.00	47.00	5.00	36.72
10.00	11.00	21.00	98.00	5.00	78.75
100.00	101.00	50.00	98.00	5.00	97.75
200.00	201.00	75.00	98.00	5.00	114.19

DENSITY OF THE LAND USE UNITS PER GRID CELL = 0.25

BASE VALUE OF THE STRUCTURE = 250000.00

BASE VALUE OF THE CONTENTS (100.00 PERCENT OF THE STRUCTURE VALUE) = 250000.00

TOTAL DAMAGE OF OTHER WILL BE THE RESPECTIVE PERCENTAGE OF THE TOTAL

VACANCY FACTOR (PERCENT DEVELOPED) = 100.0

STRUCTURE FIRST FLOOR ADJUSTMENT RELATIVE TO GROUND LEVEL = 1.00

LAND USE CATEGORY 6 DAMAGE CATEGORY NO. 6

AGGREGATED LAND USE CATEGORY NO. = 3

DEPARTMENT STORES

STAGE FROM 1ST FLOOR	STAGE ADJUSTED	PERCENT STRUCTURE	PERCENT CONTENTS	PERCENT OTHER	AMOUNT OF DAMAGE PER GRID CELL IN THOUSAND DOLLARS
0.00	2.00	0.00	0.00	0.00	0.00
1.00	3.00	3.00	16.00	5.00	27.88
2.00	4.00	7.00	33.00	5.00	52.50
3.00	5.00	7.00	65.00	5.00	94.50
4.00	6.00	7.00	88.00	5.00	124.88
5.00	7.00	9.00	95.00	5.00	138.50
8.00	10.00	17.00	99.00	5.00	152.25
10.00	12.00	23.00	99.00	5.00	180.12
100.00	102.00	50.00	99.00	5.00	196.56
200.00	202.00	76.00	99.00	5.00	228.38

DENSITY OF THE LAND USE UNITS PER GRID CELL = 0.25

BASE VALUE OF THE STRUCTURE = 600000.00

BASE VALUE OF THE CONTENTS (100.00 PERCENT OF THE STRUCTURE VALUE) = 600000.00

TOTAL DAMAGE OF OTHER WILL BE THE RESPECTIVE PERCENTAGE OF THE TOTAL

VACANCY FACTOR (PERCENT DEVELOPED) = 100.0

STRUCTURE FIRST FLOOR ADJUSTMENT RELATIVE TO GROUND LEVEL = 2.00

LAND USE CATEGORY 7 DAMAGE CATEGORY NO. 7

AGGREGATED LAND USE CATEGORY NO. = 3

GROCERY STORES

STAGE FROM 1ST FLOOR	STAGE ADJUSTED	PERCENT STRUCTURE	PERCENT CONTENTS	PERCENT OTHER	AMOUNT OF DAMAGE PER GRID CELL IN THOUSAND DOLLARS
0.00	2.00	0.00	50.00	0.00	112.50
1.00	3.00	3.00	59.00	5.00	236.81
2.00	4.00	4.00	59.00	5.00	240.18
3.00	5.00	5.00	59.00	5.00	241.76
4.00	6.00	6.00	59.00	5.00	243.34
5.00	7.00	7.00	59.00	5.00	244.91
6.00	10.00	20.00	59.00	5.00	265.39
10.00	12.00	37.00	59.00	5.00	295.16
100.00	102.00	50.00	59.00	5.00	312.94
200.00	202.00	75.00	59.00	5.00	362.01

DENSITY OF THE LAND USE UNITS PER GRID CELL = 0.50

BASE VALUE OF THE STRUCTURE = 300000.00

BASE VALUE OF THE CONTENTS (50.00 PERCENT OF THE STRUCTURE VALUE) = 150000.00

TOTAL DAMAGE OF OTHER WILL BE THE RESPECTIVE PERCENTAGE OF THE TOTAL

VACANCY FACTOR (PERCENT DEVELOPED) = 100.0

STRUCTURE FIRST FLOOR ADJUSTMENT RELATIVE TO GROUND LEVEL = 2.00

LAND USE CATEGORY 8 DAMAGE CATEGORY NO. 8

AGGREGATED LAND USE CATEGORY NO. = 3

MOTELS

STAGE FROM 1ST FLOOR	STAGE ADJUSTED	PERCENT STRUCTURE	PERCENT CONTENTS	PERCENT OTHER	AMOUNT OF DAMAGE PER GRID CELL IN THOUSAND DOLLARS
0.00	2.00	0.00	0.00	0.00	0.00
1.00	3.00	4.00	10.00	5.00	35.44
2.00	4.00	7.00	16.00	5.00	59.08
3.00	5.00	10.00	21.00	5.00	80.72
4.00	6.00	12.00	25.00	5.00	98.47
5.00	7.00	15.00	30.00	5.00	118.13
6.00	10.00	28.00	52.00	5.00	204.75
10.00	12.00	37.00	76.00	5.00	295.31
100.00	102.00	50.00	99.00	5.00	391.78
200.00	202.00	75.00	99.00	5.00	490.22

DENSITY OF THE LAND USE UNITS PER GRID CELL = 0.50

BASE VALUE OF THE STRUCTURE = 750000.00

BASE VALUE OF THE CONTENTS (50.00 PERCENT OF THE STRUCTURE VALUE) = 375000.00

TOTAL DAMAGE OF OTHER WILL BE THE RESPECTIVE PERCENTAGE OF THE TOTAL

VACANCY FACTOR (PERCENT DEVELOPED) = 100.0

STRUCTURE FIRST FLOOR ADJUSTMENT RELATIVE TO GROUND LEVEL = 2.00

LAND USE CATEGORY 9 DAMAGE CATEGORY NO. 9

AGGREGATED LAND USE CATEGORY NO. = 4

INDUSTRIAL

STAGE FROM 1ST FLOOR	STAGE ADJUSTED	PERCENT STRUCTURE	PERCENT CONTENTS	PERCENT OTHER	AMOUNT OF DAMAGE PER GRID CELL IN THOUSAND DOLLARS
0.00	2.00	0.00	0.00	0.00	0.00
1.00	3.00	1.00	11.00	5.00	34.13
2.00	4.00	1.00	16.00	5.00	47.25
3.00	5.00	1.00	19.00	5.00	55.13
4.00	6.00	1.00	21.00	5.00	60.38
5.00	7.00	3.00	23.00	5.00	76.13
6.00	10.00	12.00	47.00	5.00	166.38
10.00	12.00	21.00	99.00	5.00	370.13
100.00	102.00	50.00	99.00	5.00	622.38
200.00	202.00	75.00	99.00	5.00	863.63

DENSITY OF THE LAND USE UNITS PER GRID CELL = 0.50

BASE VALUE OF THE STRUCTURE = *****

BASE VALUE OF THE CONTENTS (50.00 PERCENT OF THE STRUCTURE VALUE) = 500000.00

TOTAL DAMAGE OF OTHER WILL BE THE RESPECTIVE PERCENTAGE OF THE TOTAL

VACANCY FACTOR (PERCENT DEVELOPED) = 100.0

STRUCTURE FIRST FLOOR ADJUSTMENT RELATIVE TO GROUND LEVEL = 2.00

LAND USE CATEGORY 10 DAMAGE CATEGORY NO. 10

AGGREGATED LAND USE CATEGORY NO. = 8

RECREATION AREAS

DEPTH	PERCENT OF DAMAGE	PERCENT DAMAGE	PERCENT DAMAGE	AMOUNT OF DAMAGE PER GRID CELL IN THOUSAND DOLLARS
0.00	0.00	0.00	0.00	0.00
1.00	0.00	0.00	0.00	0.50
2.00	0.00	0.00	0.00	1.00
3.00	0.00	0.00	0.00	1.50
4.00	0.00	0.00	0.00	2.00
5.00	0.00	0.00	0.00	2.00
8.00	0.00	0.00	0.00	2.00
10.00	0.00	0.00	0.00	2.00
100.00	0.00	0.00	0.00	2.00
200.00	0.00	0.00	0.00	2.00

DENSITY OF THE LAND USE UNITS PER GRID CELL = 0.10

BASE VALUE OF THE STRUCTURE = 0.00

BASE VALUE OF THE CONTENTS = 0.00

BASE VALUE OF OTHER = 0.00

VACANCY FACTOR (PERCENT DEVELOPED) =100.0

LAND USE CATEGORY 11 DAMAGE CATEGORY NO. 11

AGGREGATED LAND USE CATEGORY NO. = 8

OPEN SPACE

DEPTH	PERCENT OF DAMAGE	PERCENT DAMAGE	PERCENT DAMAGE	AMOUNT OF DAMAGE PER GRID CELL IN THOUSAND DOLLARS
0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	0.00	0.50

DENSITY OF THE LAND USE UNITS PER GRID CELL = 0.00

BASE VALUE OF THE STRUCTURE = 0.00

BASE VALUE OF THE CONTENTS = 0.00

BASE VALUE OF OTHER = 0.00

VACANCY FACTOR (PERCENT DEVELOPED) =100.0

LAND USE CATEGORY 12 DAMAGE CATEGORY NO. 12

AGGREGATED LAND USE CATEGORY NO. = 5

WATER BODIES

DEPTH	PERCENT OF DAMAGE	PERCENT DAMAGE	PERCENT DAMAGE	AMOUNT OF DAMAGE PER GRID CELL IN THOUSAND DOLLARS
0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	0.00	0.00

DENSITY OF THE LAND USE UNITS PER GRID CELL = 0.00

BASE VALUE OF THE STRUCTURE = 0.00

BASE VALUE OF THE CONTENTS = 0.00

BASE VALUE OF OTHER = 0.00

VACANCY FACTOR (PERCENT DEVELOPED) =100.0

DAMAGE REACH INDEX LOCATION SUMMARY

ID. NO.	REFERENCE FLOOD ELEVATION	POLICY FLOOD ELEVATION	FLOOD PROOFING ELEVATION	EVACUATION ELEVATION	STARTING DAMAGE ELEVATION	DAMAGE ELEVATION INCREMENT	AGGREGATED DAMAGE RCH. ID.	MODIFY LAND USE DENSITY	PRINT MODIFIED LAND USE
3.	84.8	0.0	0.0	0.0	88.0	2.00	0	0	0
4.	84.8	0.0	0.0	0.0	40.0	1.00	0	0	0

SINGLE EVENTS FOR DAMAGE REACHES

DAMAGE REACH NO.	10 YR EVENT	50 YR EVENT	100 YR EVENT	500 YR EVENT	200K EVENT	400K EVENT
3.	87.0	87.5	87.8	88.8	84.9	102.3
4.	43.8	43.8	43.8	44.3	47.8	51.1

DAMAGE CATEGORY	LAND USE CODE	LAND USE
1	1	RESIDENTIAL
2	2	MOBILE HOMES
3	3	SCHOOLS
4	4	OFFICES
5	5	WAREHOUSES
6	6	DEPARTMENT STORES
7	7	GROCERY STORES
8	8	MOTELS
9	9	INDUSTRIAL
10	10	RECREATION AREAS
11	11	OPEN SPACE
12	12	WATER BODIES

DAMAGE REACH NO. 3 DAMAGE REACH CODE RCH 3
CITY OF PIERRE

DAMAGE CATEGORIES												
WATER SURFACE ELEVATION	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	TOTAL	
66.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	32.80	
66.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	38.71	
70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	50.87	
72.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	167.93	
74.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	422.88	
76.0	115.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	268.54	86.25	829.40	
78.0	871.12	0.00	0.00	0.00	0.00	18.24	0.00	0.00	0.00	1084.38	231.45	2086.63
80.0	1484.98	0.00	0.00	0.00	0.00	75.40	0.00	0.00	0.00	2150.53	296.30	4086.91
82.0	2807.87	0.00	0.00	0.00	200.16	0.00	188.17	118.78	3574.94	361.15	7128.88	
84.0	3704.98	8.41	50.54	48.81	408.08	2.78	856.97	548.48	5414.49	368.40	11640.84	
86.0	4971.28	66.72	142.70	298.08	705.41	108.20	1874.88	1029.02	441.55	17127.04		
88.0	6188.98	180.38	238.08	587.84	1214.44	371.57	3264.51	1617.00	9521.06	483.80	23768.11	
90.0	7457.88	275.80	437.87	851.23	1864.81	778.97	5232.85	2426.81	11681.13	521.05	31066.68	
92.0	8706.63	403.08	661.12	1226.84	2863.06	1440.34	7430.21	3301.00	14180.48	842.46	40892.20	
94.0	10157.09	838.40	944.83	1887.10	3332.47	2293.37	9803.37	3758.21	16458.01	557.15	49756.79	
96.0	11840.90	1014.37	1392.99	2031.40	4048.26	3208.03	11402.11	4010.46	18662.77	572.20	58157.81	
98.0	13382.81	1447.31	1950.01	2335.61	4887.03	4258.34	12774.14	4204.05	20518.59	587.65	82293.41	
100.0	15325.83	1811.82	2574.25	2611.82	5433.37	5456.57	12989.23	4234.00	21365.35	600.26	72866.46	
87.0	5587.02	112.81	160.30	452.16	936.82	194.77	2642.74	1301.87	6380.30	482.80	20243.10	
(10 YR)	5856.54	134.02	201.18	524.29	1086.39	280.08	3041.60	1483.28	8963.84	473.55	22108.88	
(50 YR)	6088.18	151.34	223.30	572.49	1184.70	334.03	3174.33	1844.84	9312.67	479.80	23133.52	
(100 YR)	6551.44	191.06	294.78	880.21	1408.83	462.13	3673.88	1843.80	10124.47	498.20	28630.34	
(500 YR)	10820.88	789.27	1143.14	1882.38	3847.47	2679.30	10880.83	3027.88	17540.87	563.36	53788.82	
(200K)	17715.32	2349.67	3486.06	2868.51	8295.79	6895.80	13882.34	4268.57	21735.57	618.80	80000.45	
(400K)	181.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	72866.46	

DAMAGE REACH NO. 3 DAMAGE REACH CODE RCH 3
CITY OF PIERRE

DAMAGE CATEGORIES												
WATER SURFACE ELEVATION	(11)	(12)	(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)	TOTAL	
66.0	32.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	32.80	
66.0	38.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	38.71	
70.0	45.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	50.87	
72.0	51.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	167.93	
74.0	59.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	422.88	
76.0	66.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	629.40	
78.0	74.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2086.63	
80.0	82.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4089.91	
82.0	91.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7128.88	
84.0	100.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11640.84	
86.0	109.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17127.04	
88.0	118.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	23768.11	
90.0	128.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	31886.68	
92.0	139.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	40892.20	
94.0	148.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	49756.78	
96.0	159.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	58157.81	
98.0	170.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	82293.41	
100.0	181.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	72866.46	
87.0	113.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	20243.10	
(10 YR)	118.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	22108.88	
(50 YR)	117.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	23133.52	
(100 YR)	121.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	26830.34	
(500 YR)	153.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	53788.82	
(200K)	194.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	80000.45	
(400K)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	72866.46	

DAMAGE REACH NO. 3 DAMAGE REACH CODE RCH 3

CITY OF PIERRE

ELEVATION - STRUCTURES FLOODED

DAMAGE CATEGORIES

WATER SURFACE ELEVATION*	1	2	3	4	5	6	7	8	9	10	TOTAL
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)		
66.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1
70.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4
72.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	6.2	6.2
74.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.4	8.4
76.0	10.6	0.0	0.0	0.0	0.3	0.0	0.0	0.0	0.0	12.0	28.9
78.0	36.0	0.0	0.0	0.0	0.8	0.0	0.0	0.0	0.0	15.8	52.5
80.0	73.5	0.0	0.0	0.0	2.0	0.0	0.0	0.0	0.0	17.6	103.9
82.0	90.0	0.0	0.0	0.0	4.5	0.0	0.0	0.0	0.0	20.3	138.3
84.0	121.5	3.0	0.3	1.0	7.3	0.3	2.5	4.5	10.5	22.2	178.0
86.0	148.5	12.0	0.6	3.5	9.3	0.5	4.5	6.0	20.5	24.3	226.7
88.0	166.5	18.0	0.9	6.0	11.3	1.8	7.0	7.0	24.0	29.2	267.6
90.0	182.0	24.0	1.5	9.0	14.0	2.5	11.0	7.0	27.0	27.2	312.2
92.0	217.5	33.0	2.1	7.0	18.5	4.0	15.0	7.0	26.0	27.0	367.0
94.0	252.0	60.0	2.7	8.0	18.3	5.5	18.8	7.0	26.0	28.4	429.4
96.0	283.5	98.0	3.8	8.5	20.0	7.5	22.0	7.0	26.0	28.4	505.8
98.0	327.0	120.0	6.4	8.8	22.0	9.3	24.0	7.0	26.0	30.2	582.4
100.0	372.0	147.0	8.8	9.8	23.8	11.3	24.0	7.0	26.0	30.8	656.9
87.0	154.5	15.0	0.8	4.8	10.8	0.8	6.8	8.0	21.8	28.3	244.2
(10 YR)	154.5	15.0	0.8	5.0	10.8	1.8	7.0	8.0	23.8	28.7	240.8
(50 YR)	166.5	18.0	0.9	6.0	11.3	1.8	7.0	8.0	24.0	28.8	266.2
(100 YR)	166.5	21.0	1.2	8.0	11.8	1.8	8.0	7.0	25.8	28.8	277.0
(500 YR)	166.5	21.0	1.2	8.0	11.8	1.8	8.0	7.0	25.8	28.8	463.4
(200K)	267.0	75.0	3.3	8.0	19.0	6.3	21.0	7.0	28.0	28.0	728.2
(400K)	417.0	162.0	8.4	10.0	26.8	13.3	24.0	7.0	28.0	31.8	728.2

DAMAGE REACH NO. 3 DAMAGE REACH CODE RCH 3
CITY OF PIERRE

DAMAGE CATEGORIES												
WATER SURFACE ELEVATION	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	TOTAL	
66.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	32.80	
68.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	38.71	
70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.80	50.87	
72.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	80.06	36.98	
74.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	268.54	98.25	422.88	
76.0	115.54	0.00	0.00	0.00	0.00	0.30	0.00	0.00	0.00	677.50	163.45	829.40
78.0	871.12	0.00	0.00	0.00	0.00	18.24	0.00	0.00	0.00	1084.38	231.45	2088.63
80.0	1484.88	0.00	0.00	0.00	0.00	76.40	0.00	0.00	0.00	2150.63	296.30	4088.91
82.0	2607.87	0.00	0.00	0.00	0.00	200.18	0.00	186.17	116.76	3574.64	351.15	7128.88
84.0	3704.00	8.41	80.58	48.81	408.08	2.78	666.97	548.48	5414.49	398.40	11640.84	
86.0	4871.28	66.72	142.70	208.08	705.41	108.20	1874.88	1028.00	7279.02	441.84	17127.04	
88.0	6188.66	160.38	238.08	587.34	1214.44	371.87	3264.81	1617.00	9621.88	483.80	23768.11	
90.0	7457.88	275.80	437.87	851.23	1894.81	778.87	5232.08	2426.81	11001.13	621.05	31696.88	
92.0	8706.63	403.08	881.12	1225.64	2863.08	1440.34	7430.21	3301.06	14180.48	842.45	40882.20	
94.0	10157.09	638.40	944.83	1867.10	3332.47	2293.37	9803.37	3758.21	16456.01	557.15	49756.79	
96.0	11382.81	1447.31	1950.01	2336.61	4887.03	4258.34	12774.14	4204.06	20516.59	587.65	68293.41	
100.0	15326.63	1911.92	2674.26	2811.52	5433.37	5456.67	32269.23	4234.08	21358.35	603.26	72956.46	
87.0	6587.02	112.51	180.38	452.18	825.82	184.77	2842.74	1301.87	8380.38	482.80	20243.10	
(10 YR)	5866.54	134.02	201.18	624.28	1086.39	280.08	3041.80	1453.28	8863.84	473.56	22109.88	
(50 YR)	6088.16	151.34	223.30	572.49	1154.70	334.03	3174.33	1844.84	6312.87	479.80	23133.52	
(100 YR)	6551.44	191.98	264.70	860.21	1409.83	482.13	3673.88	1843.80	10124.47	486.20	28830.34	
(500 YR)	10820.88	789.27	1143.14	1862.38	3647.47	2679.30	10880.83	3627.88	17840.87	563.36	53788.82	
(200K)	17715.32	2349.97	3468.08	2858.51	8295.79	6895.00	13002.34	4288.57	21735.57	818.80	80880.45	
(400K)												

DAMAGE REACH NO. 3 DAMAGE REACH CODE RCH 3
CITY OF PIERRE

DAMAGE CATEGORIES												
WATER SURFACE ELEVATION	(11)	(12)	(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)	TOTAL	
66.0	32.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	32.80	
68.0	38.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	38.71	
70.0	45.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	50.87	
72.0	51.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	167.83	
74.0	59.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	422.88	
76.0	66.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	829.40	
78.0	74.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2088.63	
80.0	82.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4088.91	
82.0	91.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7128.88	
84.0	100.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11640.84	
86.0	108.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17127.04	
88.0	118.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	23768.11	
90.0	128.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	31886.88	
92.0	138.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	40882.20	
94.0	148.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	49756.79	
96.0	159.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	58157.81	
98.0	170.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	68293.41	
100.0	181.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	72956.46	
87.0	113.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	20243.10	
(10 YR)	116.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	22109.88	
(50 YR)	117.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	23133.52	
(100 YR)	121.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	28830.34	
(500 YR)	153.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	53788.82	
(200K)	194.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	80880.45	
(400K)												

DAMAGE REACH NO. 3 DAMAGE REACH CODE RCH 3

CITY OF PIERRE

ELEVATION - STRUCTURES FLOODED

DAMAGE CATEGORIES

WATER SURFACE ELEVATION*	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	TOTAL
66.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68.0	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1
70.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	1.4
72.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	5.2	5.2
74.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.5	8.4	11.9
76.0	10.8	0.0	0.0	0.0	0.3	0.0	0.0	0.0	6.9	12.0	20.3
78.0	36.0	0.0	0.0	0.0	0.5	0.0	0.0	0.0	8.5	15.8	53.5
80.0	73.5	0.0	0.0	0.0	2.0	0.0	0.0	0.0	10.5	17.6	103.8
82.0	98.0	0.0	0.0	0.0	4.8	0.0	0.5	3.0	14.0	20.3	138.3
84.0	121.5	3.0	0.3	1.0	7.3	0.3	2.5	4.8	16.5	22.2	170.0
86.0	145.5	12.0	0.6	3.5	9.3	0.6	4.5	4.5	20.5	24.3	226.7
88.0	168.5	18.0	0.9	5.0	11.3	1.8	7.0	7.0	24.0	26.2	267.6
90.0	192.0	24.0	1.6	6.0	14.0	2.8	11.0	7.0	27.0	27.2	312.2
92.0	217.5	39.0	2.1	7.0	19.8	4.0	15.0	7.0	28.0	27.9	357.0
94.0	252.0	60.0	2.7	8.0	19.3	8.5	19.8	7.0	28.0	28.4	422.4
96.0	283.5	68.0	3.9	8.5	20.0	7.5	22.0	7.0	28.0	28.4	505.8
98.0	327.0	120.0	8.4	9.5	22.0	8.3	24.0	7.0	28.0	30.2	682.4
100.0	372.0	147.0	8.6	9.6	23.8	11.3	24.0	7.0	28.0	30.8	860.0
87.0	154.5	15.0	0.8	4.5	10.5	0.8	8.5	8.0	21.5	25.3	244.2
(10 YR)											
87.5	154.5	15.0	0.8	6.0	10.8	1.8	7.0	8.0	23.5	25.7	249.8
(50 YR)											
87.8	166.5	18.0	0.8	5.0	11.3	1.8	7.0	8.0	24.0	26.8	268.2
(100 YR)											
88.8	180.5	21.0	1.2	8.0	11.5	1.8	8.0	7.0	25.5	26.8	277.0
(500 YR)											
84.8	267.0	76.0	3.3	8.0	19.0	8.3	21.0	7.0	28.0	28.0	463.4
(200K)											
102.3	417.0	182.0	8.4	10.0	26.8	13.3	24.0	7.0	28.0	31.8	728.2
(400K)											

DAMAGE REACH NO. 4 DAMAGE REACH CODE RCH 4
CITY OF FORT PIERRE

DAMAGE CATEGORIES

WATER SURFACE ELEVATION*	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	TOTAL
40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
41.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03
42.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18
43.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64
44.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45.0	384.77	0.00	0.00	0.00	0.00	0.00	3482.66	0.00	0.00	0.00	3849.54
46.0	1986.39	0.00	0.00	0.00	0.00	0.00	4007.06	0.00	0.00	0.00	5996.50
47.0	3387.90	0.00	0.00	0.00	0.00	0.00	4810.66	0.00	0.00	0.00	8302.71
48.0	4838.64	0.00	0.00	0.00	0.00	0.00	8020.96	0.00	0.00	0.00	10663.20
49.0	5721.98	0.00	0.00	0.00	0.00	0.00	7158.04	0.00	0.00	0.00	12934.79
50.0	6741.48	0.00	0.00	0.00	0.00	0.00	7974.20	0.00	0.00	0.00	14723.68
51.0	7518.36	0.00	0.00	0.00	0.00	0.00	8261.72	0.00	0.00	0.00	15790.04
52.0	8246.89	0.00	0.00	0.00	0.00	0.00	8436.23	0.00	0.00	0.00	16663.99
53.0	9000.75	0.00	0.00	0.00	0.00	0.00	8666.98	0.00	0.00	0.00	17714.44
54.0	9888.69	0.00	0.00	0.00	0.00	0.00	8861.81	0.00	0.00	0.00	18876.30
55.0	10812.97	0.00	0.00	0.00	0.00	0.00	9126.74	0.00	0.00	0.00	19960.69
56.0	11411.66	0.00	0.00	0.00	0.00	0.00	9395.99	0.00	0.00	0.00	20728.12
57.0	11887.18	0.00	0.00	0.00	0.00	0.00	9456.24	0.00	0.00	0.00	21346.08
(10 YR)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
(50 YR)	0.00	0.00	0.00	0.00	0.00	0.00	1028.11	0.00	0.00	0.00	1027.27
(100 YR)	0.00	0.00	0.00	0.00	0.00	0.00	1627.45	0.00	0.00	0.00	1628.68
(44.3)	18.48	0.00	0.00	0.00	0.00	0.00	2232.78	0.00	0.00	0.00	2252.80
(500 YR)	4069.46	0.00	0.00	0.00	0.00	0.00	5478.94	0.00	0.00	0.00	8641.14
(200K)	47.5	0.00	0.00	0.00	0.00	0.00	8276.84	0.00	0.00	0.00	15877.75
(400K)	51.1	7591.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

DAMAGE REACH NO. 4 DAMAGE REACH CODE RCH 4
CITY OF FORT PIERRE

DAMAGE CATEGORIES

WATER SURFACE ELEVATION*	(11)	(12)	(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)	TOTAL
40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
41.0	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03
42.0	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16
43.0	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64
44.0	1.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.31
45.0	2.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.12
46.0	3.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.07
47.0	4.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.15
48.0	5.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.37
49.0	6.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.75
50.0	8.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.28
51.0	9.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.98
52.0	11.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11.77
53.0	13.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	13.73
54.0	15.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	15.79
55.0	17.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17.98
56.0	20.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	20.27
57.0	22.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	22.67
(10 YR)	0.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.95
(50 YR)	1.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.16
(100 YR)	1.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.23
(500 YR)	1.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.54
(200K)	47.5	4.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.74
(400K)	51.1	10.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.13

DAMAGE REACH NO. 4 DAMAGE REACH CODE RCH 4

CITY OF FORT PIERRE

ELEVATION - STRUCTURES FLOODED

DAMAGE CATEGORIES

WATER	1	2	3	4	5	6	7	8	9	10	TOTAL
SURFACE	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	
ELEVATION											
40.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
41.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
43.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45.0	49.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	57.5
46.0	120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	137.5
47.0	163.5	0.0	0.0	0.0	0.0	0.0	0.0	11.0	0.0	0.0	174.5
48.0	190.5	0.0	0.0	0.0	0.0	0.0	0.0	13.0	0.0	0.0	203.5
49.0	214.5	0.0	0.0	0.0	0.0	0.0	0.0	16.5	0.0	0.0	230.0
50.0	220.5	0.0	0.0	0.0	0.0	0.0	0.0	16.5	0.0	0.0	237.0
51.0	223.5	0.0	0.0	0.0	0.0	0.0	0.0	16.5	0.0	0.0	240.0
52.0	229.5	0.0	0.0	0.0	0.0	0.0	0.0	16.5	0.0	0.0	244.0
53.0	236.5	0.0	0.0	0.0	0.0	0.0	0.0	16.5	0.0	0.0	252.0
54.0	241.5	0.0	0.0	0.0	0.0	0.0	0.0	16.5	0.0	0.0	258.0
55.0	247.5	0.0	0.0	0.0	0.0	0.0	0.0	16.5	0.0	0.0	264.0
56.0	252.0	0.0	0.0	0.0	0.0	0.0	0.0	16.5	0.0	0.0	268.0
57.0	256.0	0.0	0.0	0.0	0.0	0.0	0.0	16.5	0.0	0.0	271.5
(10 YR)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
(43.8)	0.0	0.0	0.0	0.0	0.0	0.0	4.0	0.0	0.0	0.0	4.0
(50 YR)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
(100 YR)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
(500 YR)	3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.0
(2000)	168.0	0.0	0.0	0.0	0.0	0.0	12.0	0.0	0.0	0.0	180.0
(5000)	223.5	0.0	0.0	0.0	0.0	0.0	16.5	0.0	0.0	0.0	240.0
(400K)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

SINGLE EVENT DAMAGES

AGGREGATED DAMAGE CATEGORIES

DAM	W.S.	1	2	3	4	5	6	7	8	9	10	TOTAL
RCH	ELEV											
3	87.00	5899.53	621.55	4985.10	8380.30	576.52	0.00	0.00	0.00	0.00	0.00	20243.10
3	87.50	5990.55	725.48	5840.34	8963.84	589.86	0.00	0.00	0.00	0.00	0.00	22109.86
3	87.80	6219.50	795.79	6208.01	9312.87	597.55	0.00	0.00	0.00	0.00	0.00	23133.52
3	88.80	6743.42	955.01	7389.62	10124.47	617.82	0.00	0.00	0.00	0.00	0.00	25630.34
3	94.80	11810.13	3008.52	20015.47	17540.87	716.83	0.00	0.00	0.00	0.00	0.00	53788.82
3	102.30	20084.89	6324.57	31152.40	21734.57	812.82	0.00	0.00	0.00	0.00	0.00	80080.46
4	43.50	0.00	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.05
4	43.80	0.00	0.00	1026.11	0.00	1.16	0.00	0.00	0.00	0.00	0.00	1027.27
4	43.90	0.00	0.00	1627.45	0.00	1.23	0.00	0.00	0.00	0.00	0.00	1628.68
4	44.30	18.48	0.00	2332.78	0.00	1.54	0.00	0.00	0.00	0.00	0.00	2252.90
4	47.50	4059.40	0.00	8476.84	0.00	4.74	0.00	0.00	0.00	0.00	0.00	9541.14
4	51.10	7591.78	0.00	8276.84	0.00	10.13	0.00	0.00	0.00	0.00	0.00	15877.76

 END OF RUN
 DAMCAL PROGRAM STOP

Elapsed CPU time is 24 seconds or 0.400 minutes.

Output Data for Reaches 1, 2, 6, 7, 8, 9, 10, 11, 12 & 13

```
*****  
* Damage Reach Stage-Damage Calculation Program *  
* Users Manual February 1979 *  
* Version 2.0.13; July 1992 *  
* IBM-PC Compatible (MS) *  
* Run date 24JUL92 time 08:56:55 *  
*****
```

DDDDD	A	M	M	CCCCC	A	L
D D	A A	MM	MM	C C	A A	L
D D	A A	M M M M	C		A A	L
D D	AAAAAA	M M M	C	AAAAAA		L
D D	A A	M M	C	A A		L
D D	A A	M M	C	C A	A	L
DDDDD	A	A	M M	CCCCC	A	LLLLLL

```
*****  
* U.S. Army Corps of Engineers *  
* The Hydrologic Engineering Center *  
* 609 Second Street, Suite B *  
* Davis, California 95616 *  
* (916) 756-1104 *  
*****
```

ANALYSIS INFORMATION

IPOL = 0, THERE IS NO POLICY CONTROL IN THIS RUN
IPROF = 0, THERE IS NO FLOOD PROOFING IN THIS RUN
IEVAC = 0, THERE IS NO PERMANENT EVACUATION IN THIS RUN
IEVCLU = 0, THERE IS NO PERMANENT EVACUATION IN THIS RUN
IPRINT = 0, NORMAL PRINTOUT
ITRACE = 0, NO TRACE OUTPUT WILL BE DISPLAYED
ITYPE = 1, NUMBER OF SINGLE EVENT DAMAGES TO BE CALCULATED
IAG = 1, AGGREGATE SINGLE EVENT DAMAGES

DATA BANK INFORMATION

NFILE = 1, THE DATA BANK IS ON THIS COMPUTER UNIT
NFORM = 1, THE DATA BANK IS FORMATTED
NOV = 8, THE NUMBER OF DATA VARIABLES
IROW = 1484, THE NUMBER OF ROWS IN THE DATA BANK
ICOL = 810, THE NUMBER OF COLUMNS IN THE DATA BANK
IMAGE = 1, PRINTED IMAGE OF INPUT DECK

DATA VARIABLE INFORMATION

IDAMRC = 3, THE DATA VARIABLE THAT IS THE DAMAGE REACH CODE
NOOR = 10, THE NUMBER OF DAMAGE REACHES IN THIS ANALYSIS
ILAND = 4, THE DATA VARIABLE THAT IS THE LAND USE ANALYZED
NOLUC = 4, THE NUMBER OF LAND USE CATEGORIES
ITOPO = 8, THE DATA VARIABLE THAT IS TOPOGRAPHY
IRFFD = 8, THE DATA VARIABLE THAT IS THE REFERENCE FLOOD ELEVATION
IELV = 18, THE NUMBER OF ELEVATION-DAMAGE POINTS TO BE CALCULATED
GSIZE = 1.00, GRID CELL SIZE IN ACRES, ELEVATION-AREA TABLE DEVELOPED

ZW A=MISSOURI E=1992 F=AG-EXISTING

FILE SYSTEM INFORMATION - A FILE WILL BE CREATED TO PASS DEPTH-AREA DATA TO OTHER
HEC PROGRAMS USING THE HEC DATA STORAGE SYSTEM (HECDSS).

PROJ = MISSOURI
ALT = AG-EXISTING
YEAR = 1992

LAND USE CATEGORY 1 DAMAGE CATEGORY NO. 1

AGGREGATED LAND USE CATEGORY NO. = 0

CROPLAND

DEPTH	PERCENT	PERCENT	PERCENT	AMOUNT OF DAMAGE
OF	DAMAGE	DAMAGE	DAMAGE	PER GRID CELL
WATER	STRUCTURE	CONTENTS	OTHER	IN THOUSAND DOLLARS
0.00	0.00	0.00	0.00	0.00
10.00	0.00	0.00	0.00	100.00
50.00	0.00	0.00	0.00	100.00
100.00	0.00	0.00	0.00	100.00
150.00	0.00	0.00	0.00	100.00
200.00	0.00	0.00	0.00	100.00

DENSITY OF THE LAND USE UNITS PER GRID CELL = 1.00

BASE VALUE OF THE STRUCTURE = 0.00

BASE VALUE OF THE CONTENTS = 0.00

BASE VALUE OF OTHER = 0.00

VACANCY FACTOR (PERCENT DEVELOPED) =100.0

LAND USE CATEGORY 2 DAMAGE CATEGORY NO. 2

AGGREGATED LAND USE CATEGORY NO. = 0

WOODLAND

DEPTH	PERCENT	PERCENT	PERCENT	AMOUNT OF DAMAGE
OF	DAMAGE	DAMAGE	DAMAGE	PER GRID CELL
WATER	STRUCTURE	CONTENTS	OTHER	IN THOUSAND DOLLARS
0.00	0.00	0.00	0.00	0.00
10.00	0.00	0.00	0.00	5.00
50.00	0.00	0.00	0.00	5.00
100.00	0.00	0.00	0.00	5.00
150.00	0.00	0.00	0.00	5.00
200.00	0.00	0.00	0.00	5.00

DENSITY OF THE LAND USE UNITS PER GRID CELL = 1.00

BASE VALUE OF THE STRUCTURE = 0.00

BASE VALUE OF THE CONTENTS = 0.00

BASE VALUE OF OTHER = 0.00

VACANCY FACTOR (PERCENT DEVELOPED) =100.0

LAND USE CATEGORY 3 DAMAGE CATEGORY NO. 3

AGGREGATED LAND USE CATEGORY NO. = 0

GRASSLAND

DEPTH	PERCENT	PERCENT	PERCENT	AMOUNT OF DAMAGE
OF	DAMAGE	DAMAGE	DAMAGE	PER GRID CELL
WATER	STRUCTURE	CONTENTS	OTHER	IN THOUSAND DOLLARS
0.00	0.00	0.00	0.00	0.00
10.00	0.00	0.00	0.00	1.00
50.00	0.00	0.00	0.00	1.00
100.00	0.00	0.00	0.00	1.00
150.00	0.00	0.00	0.00	1.00
200.00	0.00	0.00	0.00	1.00

DENSITY OF THE LAND USE UNITS PER GRID CELL = 1.00

BASE VALUE OF THE STRUCTURE = 0.00

BASE VALUE OF THE CONTENTS = 0.00

BASE VALUE OF OTHER = 0.00

VACANCY FACTOR (PERCENT DEVELOPED) =100.0

LAND USE CATEGORY 4 DAMAGE CATEGORY NO. 4
 AGGREGATED LAND USE CATEGORY NO. = 0

WATER

DEPTH OF WATER	PERCENT OF DAMAGE	PERCENT OF STRUCTURE	PERCENT CONTENTS	PERCENT OTHER	AMOUNT OF DAMAGE PER GRID CELL IN THOUSAND DOLLARS
0.00	0.00	0.00	0.00	0.00	0.00
10.00	0.00	0.00	0.00	0.00	0.00
50.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	0.00	0.00	0.00
150.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	0.00	0.00	0.00

DENSITY OF THE LAND USE UNITS PER GRID CELL = 1.00

BASE VALUE OF THE STRUCTURE = 0.00
 BASE VALUE OF THE CONTENTS = 0.00
 BASE VALUE OF OTHER = 0.00
 VACANCY FACTOR (PERCENT DEVELOPED) =100.0

DAMAGE REACH INDEX LOCATION SUMMARY

ID. NO.	REFERENCE FLOOD ELEVATION	POLICY FLOOD ELEVATION	FLOOD PROOFING ELEVATION	EVACUATION ELEVATION	STARTING DAMAGE ELEVATION	ELEVATION INCREMENT	AGGREGATED DAMAGE RCH. ID.	MODIFY LAND USE DENSITY	PRINT MODIFIED LAND USE
1.	210.0	0.0	0.0	0.0	0.0	10.00	0	0	0
2.	210.0	0.0	0.0	0.0	0.0	10.00	0	0	0
6.	210.0	0.0	0.0	0.0	0.0	10.00	0	0	0
7.	150.0	0.0	0.0	0.0	0.0	10.00	0	0	0
8.	150.0	0.0	0.0	0.0	0.0	10.00	0	0	0
9.	150.0	0.0	0.0	0.0	0.0	10.00	0	0	0
10.	150.0	0.0	0.0	0.0	0.0	10.00	0	0	0
11.	150.0	0.0	0.0	0.0	0.0	10.00	0	0	0
12.	150.0	0.0	0.0	0.0	0.0	10.00	0	0	0
13.	150.0	0.0	0.0	0.0	0.0	10.00	0	0	0

SINGLE EVENTS FOR DAMAGE REACHES

DAMAGE REACH NO.	200K EVENT
1.	85.0
2.	85.0
6.	85.0
7.	83.0
8.	83.0
9.	83.0
10.	83.0
11.	83.0
12.	83.0
13.	83.0

DAMAGE CATEGORY	LAND USE CODE	LAND USE
1	1	CROPLAND
2	2	WOODLAND
3	3	GRASSLAND
4	4	WATER

DAMAGE REACH NO. 1 DAMAGE REACH CODE RCH 1

HUGHES COUNTY, UPSTREAM OF PIERRE

ELEVATION - AREA FLOODED (IN ACRES)
DAMAGE CATEGORIES

WATER SURFACE ELEVATION*	1	2	3	4	5	6	7	8	9	10	TOTAL
(-1)	(-2)	(-3)	(-4)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50.0	0.0	0.0	0.0	4.0	0.0	0.0	0.0	0.0	0.0	0.0	4.0
60.0	0.0	0.0	0.0	22.0	0.0	0.0	0.0	0.0	0.0	0.0	22.0
70.0	0.0	0.0	0.0	59.0	0.0	0.0	0.0	0.0	0.0	0.0	59.0
80.0	0.0	0.0	0.0	107.0	0.0	0.0	0.0	0.0	0.0	0.0	107.0
90.0	0.0	0.0	0.0	183.0	0.0	0.0	0.0	0.0	0.0	0.0	183.0
100.0	0.0	0.0	0.0	222.0	0.0	0.0	0.0	0.0	0.0	0.0	222.0
110.0	0.0	0.0	0.0	292.0	0.0	0.0	0.0	0.0	0.0	0.0	292.0
120.0	0.0	0.0	0.0	362.0	0.0	0.0	0.0	0.0	0.0	0.0	362.0
130.0	0.0	0.0	0.0	422.0	0.0	0.0	0.0	0.0	0.0	0.0	422.0
140.0	0.0	0.0	0.0	598.0	0.0	0.0	0.0	0.0	0.0	0.0	598.0
150.0	0.0	0.0	0.0	686.0	0.0	0.0	0.0	0.0	0.0	0.0	686.0
160.0	0.0	0.0	0.0	807.0	0.0	0.0	0.0	0.0	0.0	0.0	807.0
170.0	0.0	0.0	0.0	988.0	0.0	0.0	0.0	0.0	0.0	0.0	988.0
85.0	0.0	0.0	184.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	184.0
(200K)											

DAMAGE REACH NO. 2 DAMAGE REACH CODE RCH 2

STANLEY COUNTY, UPSTREAM OF FORT PIERRE

ELEVATION - AREA FLOODED (IN ACRES)
DAMAGE CATEGORIES

WATER SURFACE ELEVATION*	1	2	3	4	5	6	7	8	9	10	TOTAL
(-1)	(-2)	(-3)	(-4)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50.0	0.0	0.0	0.0	1237.0	0.0	0.0	0.0	0.0	0.0	0.0	1237.0
60.0	0.0	0.0	0.0	1889.0	0.0	0.0	0.0	0.0	0.0	0.0	1889.0
70.0	0.0	0.0	0.0	2731.0	0.0	0.0	0.0	0.0	0.0	0.0	2731.0
80.0	0.0	0.0	0.0	3100.0	0.0	0.0	0.0	0.0	0.0	0.0	3100.0
90.0	29.0	0.0	0.0	3285.0	0.0	0.0	0.0	0.0	0.0	0.0	3285.0
100.0	58.0	0.0	0.0	3436.0	0.0	0.0	0.0	0.0	0.0	0.0	3436.0
110.0	93.0	0.0	0.0	3874.0	0.0	0.0	0.0	0.0	0.0	0.0	3874.0
120.0	148.0	0.0	0.0	3714.0	0.0	0.0	0.0	0.0	0.0	0.0	3714.0
130.0	216.0	0.0	0.0	3815.0	0.0	0.0	0.0	0.0	0.0	0.0	3815.0
140.0	218.0	0.0	0.0	3889.0	0.0	0.0	0.0	0.0	0.0	0.0	3889.0
150.0	218.0	0.0	0.0	3951.0	0.0	0.0	0.0	0.0	0.0	0.0	3951.0
160.0	218.0	0.0	0.0	4005.0	0.0	0.0	0.0	0.0	0.0	0.0	4005.0
170.0	218.0	0.0	0.0	4015.0	0.0	0.0	0.0	0.0	0.0	0.0	4015.0
85.0	39.0	0.0	0.0	3351.0	0.0	0.0	0.0	0.0	0.0	0.0	3351.0
(200K)											

DAMAGE REACH NO. 6 DAMAGE REACH CODE RCH 6

STANLEY COUNTY, DOWNSTREAM OF FORT PIERRE

ELEVATION - AREA FLOODED (IN ACRES)
DAMAGE CATEGORIES

WATER SURFACE ELEVATION*	1	2	3	4	5	6	7	8	9	10	TOTAL
(-1)	(-2)	(-3)	(-4)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50.0	578.0	0.0	0.0	462.0	0.0	0.0	0.0	0.0	0.0	0.0	1040.0
60.0	580.0	0.0	0.0	607.0	0.0	0.0	0.0	0.0	0.0	0.0	1187.0
70.0	580.0	0.0	0.0	704.0	0.0	0.0	0.0	0.0	0.0	0.0	1284.0
80.0	580.0	0.0	0.0	753.0	0.0	0.0	0.0	0.0	0.0	0.0	1333.0
90.0	580.0	0.0	0.0	782.0	0.0	0.0	0.0	0.0	0.0	0.0	1362.0
100.0	580.0	0.0	0.0	795.0	0.0	0.0	0.0	0.0	0.0	0.0	1375.0
110.0	580.0	0.0	0.0	806.0	0.0	0.0	0.0	0.0	0.0	0.0	1386.0
120.0	580.0	0.0	0.0	810.0	0.0	0.0	0.0	0.0	0.0	0.0	1390.0
130.0	580.0	0.0	0.0	810.0	0.0	0.0	0.0	0.0	0.0	0.0	1390.0
140.0	580.0	0.0	0.0	810.0	0.0	0.0	0.0	0.0	0.0	0.0	1390.0
150.0	580.0	0.0	0.0	810.0	0.0	0.0	0.0	0.0	0.0	0.0	1390.0
160.0	580.0	0.0	0.0	810.0	0.0	0.0	0.0	0.0	0.0	0.0	1390.0
170.0	580.0	0.0	0.0	810.0	0.0	0.0	0.0	0.0	0.0	0.0	1390.0
85.0	580.0	0.0	0.0	790.0	0.0	0.0	0.0	0.0	0.0	0.0	1370.0
(200K)											

DAMAGE REACH NO. 7 DAMAGE REACH CODE RCH 7

HUGHES COUNTY, DOWNSTREAM OF PIERRE

ELEVATION - AREA FLOODED (IN ACRES)

DAMAGE CATEGORIES

WATER SURFACE ELEVATION*	1	2	3	4	5	6	7	8	9	10	TOTAL
(-1)	(-2)	(-3)	(-4)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	
0.0	0.0	0.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10.0
10.0	14.0	0.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	15.0
20.0	18.0	0.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	17.0
30.0	789.0	0.0	250.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1039.0
40.0	1775.0	0.0	621.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2366.0
50.0	2615.0	0.0	1198.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3611.0
60.0	3459.0	0.0	1000.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5119.0
70.0	3984.0	0.0	2245.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6229.0
80.0	4446.0	0.0	3318.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7782.0
90.0	4597.0	0.0	4360.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8857.0
100.0	4688.0	0.0	5270.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9866.0
110.0	4780.0	0.0	6030.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10810.0
120.0	4855.0	0.0	6842.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11787.0
130.0	4936.0	0.0	7791.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	12727.0
140.0	5048.0	0.0	8386.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	13434.0
150.0	5126.0	0.0	8875.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14001.0
160.0	5190.0	0.0	9190.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14380.0
170.0	5228.0	0.0	9373.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14560.0
83.0	4524.0	0.0	3659.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8183.0
(200K)											

DAMAGE REACH NO. 8 DAMAGE REACH CODE RCH 8

STANLEY COUNTY, DS OF REACH 8

ELEVATION - AREA FLOODED (IN ACRES)

DAMAGE CATEGORIES

WATER SURFACE ELEVATION*	1	2	3	4	5	6	7	8	9	10	TOTAL
(-1)	(-2)	(-3)	(-4)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	
0.0	0.0	0.0	3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.0
10.0	0.0	0.0	3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.0
20.0	0.0	0.0	3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.0
30.0	0.0	0.0	3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.0
40.0	0.0	0.0	1511.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1511.0
50.0	0.0	0.0	2403.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2403.0
60.0	0.0	0.0	2828.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2828.0
70.0	0.0	0.0	3100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3100.0
80.0	0.0	0.0	3361.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3361.0
90.0	0.0	0.0	3870.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3870.0
100.0	0.0	0.0	4111.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4111.0
110.0	0.0	0.0	4327.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4327.0
120.0	0.0	0.0	4499.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4499.0
130.0	0.0	0.0	4602.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4602.0
140.0	0.0	0.0	4641.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4641.0
150.0	0.0	0.0	4853.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4853.0
160.0	0.0	0.0	4854.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4854.0
170.0	0.0	0.0	4854.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4854.0
83.0	0.0	0.0	3567.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3567.0
(200K)											

DAMAGE REACH NO. 9 DAMAGE REACH CODE RCH 9

LOWER BRULE RESERVATION, STANLEY COUNTY

ELEVATION - AREA FLOODED (IN ACRES)

DAMAGE CATEGORIES

WATER SURFACE ELEVATION*	1	2	3	4	5	6	7	8	9	10	TOTAL
(-1)	(-2)	(-3)	(-4)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30.0	635.0	3.0	1828.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2264.0
40.0	1730.0	225.0	2332.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4287.0
50.0	2281.0	256.0	2820.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5357.0
60.0	2823.0	425.0	3189.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6437.0
70.0	3274.0	464.0	3368.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7104.0
80.0	3368.0	464.0	3549.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7381.0
90.0	3374.0	464.0	3719.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7557.0
100.0	3374.0	464.0	3780.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7618.0
110.0	3374.0	464.0	3803.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7641.0
120.0	3374.0	464.0	3814.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7652.0
130.0	3374.0	464.0	3822.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7660.0
140.0	3374.0	464.0	3831.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7669.0
150.0	3374.0	464.0	3838.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7676.0
160.0	3374.0	464.0	3844.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7682.0
170.0	3374.0	464.0	3854.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7692.0
83.0	3374.0	464.0	3608.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7446.0
(200K)											

DAMAGE REACH NO. 10 DAMAGE REACH CODE RCH 10

CROW CREEK RESERVATION, HUGHES COUNTY

ELEVATION - AREA FLOODED (IN ACRES)
DAMAGE CATEGORIES

WATER SURFACE ELEVATION	(-1)	1	2	3	4	5	6	7	8	9	10	TOTAL
ELEVATION	(-1)	(-2)	(-3)	(-4)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20.0	826.0	118.0	1568.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2613.0
30.0	2363.0	292.0	3027.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5082.0
40.0	4060.0	431.0	3724.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6215.0
50.0	5583.0	534.0	4384.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10461.0
60.0	7550.0	627.0	6017.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	13184.0
70.0	8874.0	708.0	6422.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	15005.0
80.0	10118.0	805.0	6056.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	16977.0
90.0	11418.0	984.0	6361.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	18763.0
100.0	11868.0	984.0	6588.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	19420.0
110.0	11989.0	984.0	6689.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	19682.0
120.0	12078.0	984.0	6777.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	19838.0
130.0	12149.0	984.0	6871.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20004.0
140.0	12202.0	984.0	6873.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20159.0
150.0	12221.0	984.0	7046.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20261.0
160.0	12245.0	984.0	7069.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20298.0
170.0	12274.0	984.0	7071.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20328.0
83.0	10654.0	983.0	6188.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	17805.0
(200K)												

DAMAGE REACH NO. 11 DAMAGE REACH CODE RCH 11

LOWER BRAULE RESERVATION, LYMAN COUNTY

ELEVATION - AREA FLOODED (IN ACRES)
DAMAGE CATEGORIES

WATER SURFACE ELEVATION	(-1)	1	2	3	4	5	6	7	8	9	10	TOTAL
ELEVATION	(-1)	(-2)	(-3)	(-4)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10.0	528.0	0.0	58.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	584.0
20.0	3184.0	3.0	917.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4104.0
30.0	5951.0	73.0	2009.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8033.0
40.0	7537.0	144.0	3117.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10798.0
50.0	8749.0	213.0	4285.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	13247.0
60.0	9722.0	240.0	5579.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	15541.0
70.0	10653.0	240.0	7292.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	18185.0
80.0	11758.0	240.0	9184.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	21182.0
90.0	13452.0	240.0	11554.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	25246.0
100.0	14509.0	240.0	13510.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	28259.0
110.0	15073.0	240.0	14976.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	30289.0
120.0	15469.0	240.0	15799.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	31506.0
130.0	15998.0	240.0	16390.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	32826.0
140.0	16498.0	240.0	16731.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	33467.0
150.0	16844.0	240.0	16958.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	34042.0
160.0	17212.0	240.0	17131.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	34563.0
170.0	17590.0	240.0	17276.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36106.0
83.0	12517.0	240.0	9881.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	22848.0
(200K)												

DAMAGE REACH NO. 12 DAMAGE REACH CODE RCH 12

CROW CREEK RESERVATION, HYDE COUNTY

ELEVATION - AREA FLOODED (IN ACRES)
DAMAGE CATEGORIES

WATER SURFACE ELEVATION	(-1)	1	2	3	4	5	6	7	8	9	10	TOTAL
ELEVATION	(-1)	(-2)	(-3)	(-4)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	(-1)	
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20.0	14.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.0
30.0	46.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	46.0
40.0	62.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	62.0
50.0	77.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	77.0
60.0	98.0	0.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	100.0
70.0	149.0	0.0	10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	159.0
80.0	208.0	0.0	23.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	231.0
90.0	255.0	0.0	32.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	287.0
100.0	329.0	0.0	35.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	364.0
110.0	408.0	0.0	36.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	441.0
120.0	473.0	0.0	36.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	508.0
130.0	553.0	0.0	35.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	588.0
140.0	627.0	0.0	36.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	662.0
150.0	695.0	0.0	36.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	730.0
160.0	753.0	0.0	36.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	788.0
170.0	803.0	0.0	36.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	839.0
83.0	222.0	0.0	27.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	249.0
(200K)												

DAMAGE REACH NO. 13 DAMAGE REACH CODE RCH 13

CROW CREEK RESERVATION, BUFFALO COUNTY

ELEVATION - AREA FLOODED (IN ACRES)

DAMAGE CATEGORIES

WATER SURFACE ELEVATION	(-1)	(-2)	(-3)	(-4)	(-5)	(-6)	(-7)	(-8)	(-9)	(-10)	TOTAL
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10.0	182.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	182.0
20.0	202.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	202.0
30.0	321.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	337.0
40.0	597.0	0.0	36.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	633.0
50.0	1360.0	0.0	138.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1498.0
60.0	2844.0	0.0	808.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3653.0
70.0	5067.0	0.0	2068.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7135.0
80.0	6319.0	0.0	2882.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8211.0
90.0	6699.0	0.0	3048.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8847.0
100.0	7270.0	0.0	3102.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10372.0
110.0	7487.0	0.0	3122.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10609.0
120.0	7628.0	0.0	3123.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10781.0
130.0	7699.0	0.0	3123.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10822.0
140.0	7756.0	0.0	3123.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10879.0
150.0	7818.0	0.0	3126.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10944.0
160.0	7864.0	0.0	3131.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10986.0
170.0	7901.0	0.0	3148.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11049.0
83.0	8502.0	0.0	2079.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8481.0
(200K)											

SINGLE EVENT DAMAGES

AGGREGATED DAMAGE REACH NO. 1 200K EVENT

AGGREGATED DAMAGE CATEGORIES

DAM	W.G.	1	2	3	4	5	6	7	8	9	10	TOTAL
RCH	ELEV											
1	98.00	186.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	186.00
2	98.00	6068.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6068.30
6	98.00	58781.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	58781.50
7	83.00	-----	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-----
8	83.00	3332.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3332.50
9	83.00	-----	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-----
10	83.00	-----	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-----
11	83.00	-----	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-----
12	83.00	19831.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	19831.70
13	83.00	-----	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-----
TOTAL	-----	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-----

+++++
END OF RUN
DAMCAL PROGRAM STOP
+++++

Elapsed CPU time is 302 seconds or 5.033 minutes.

C-4. HEC-DSS Displays

The following displays are output from HEC-DAMCAL into HEC-DSS.

27JUL92 07:22:41

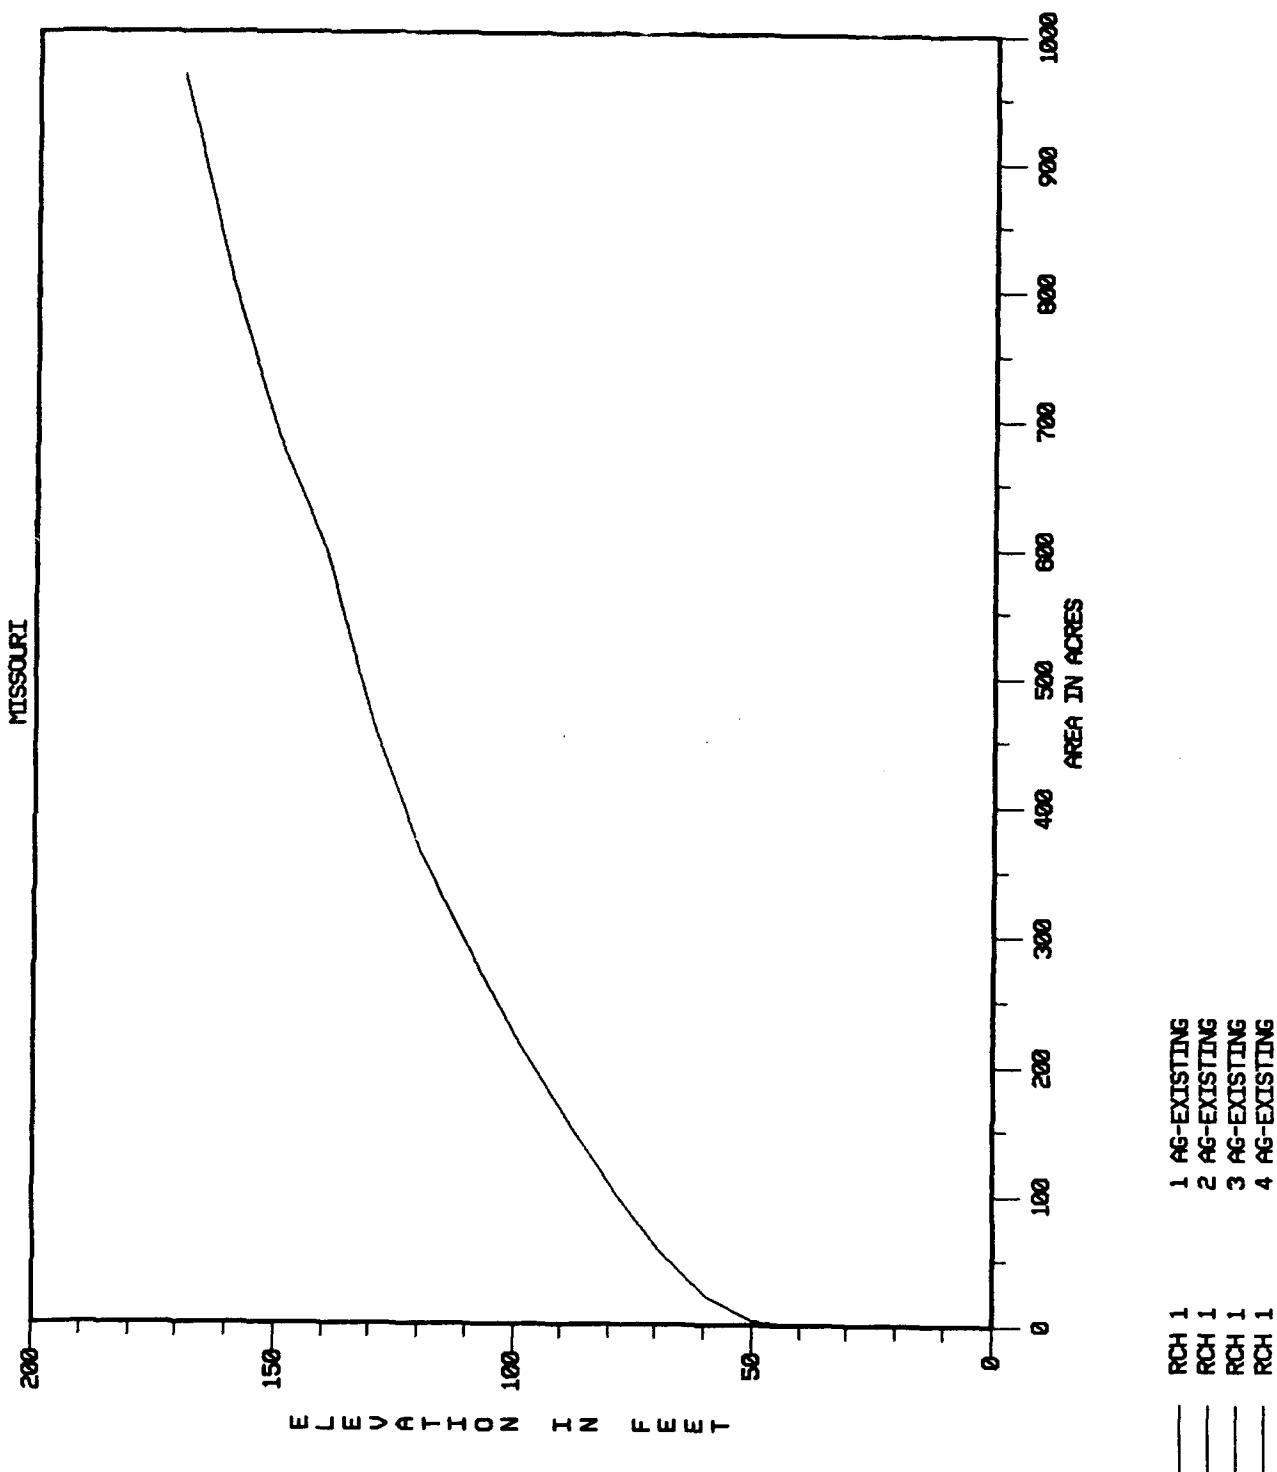


FIGURE C-7. Damage Reach 1 Elevation - Crop Area Relationships

27 JUL 92 07:30:43

MISSOURI


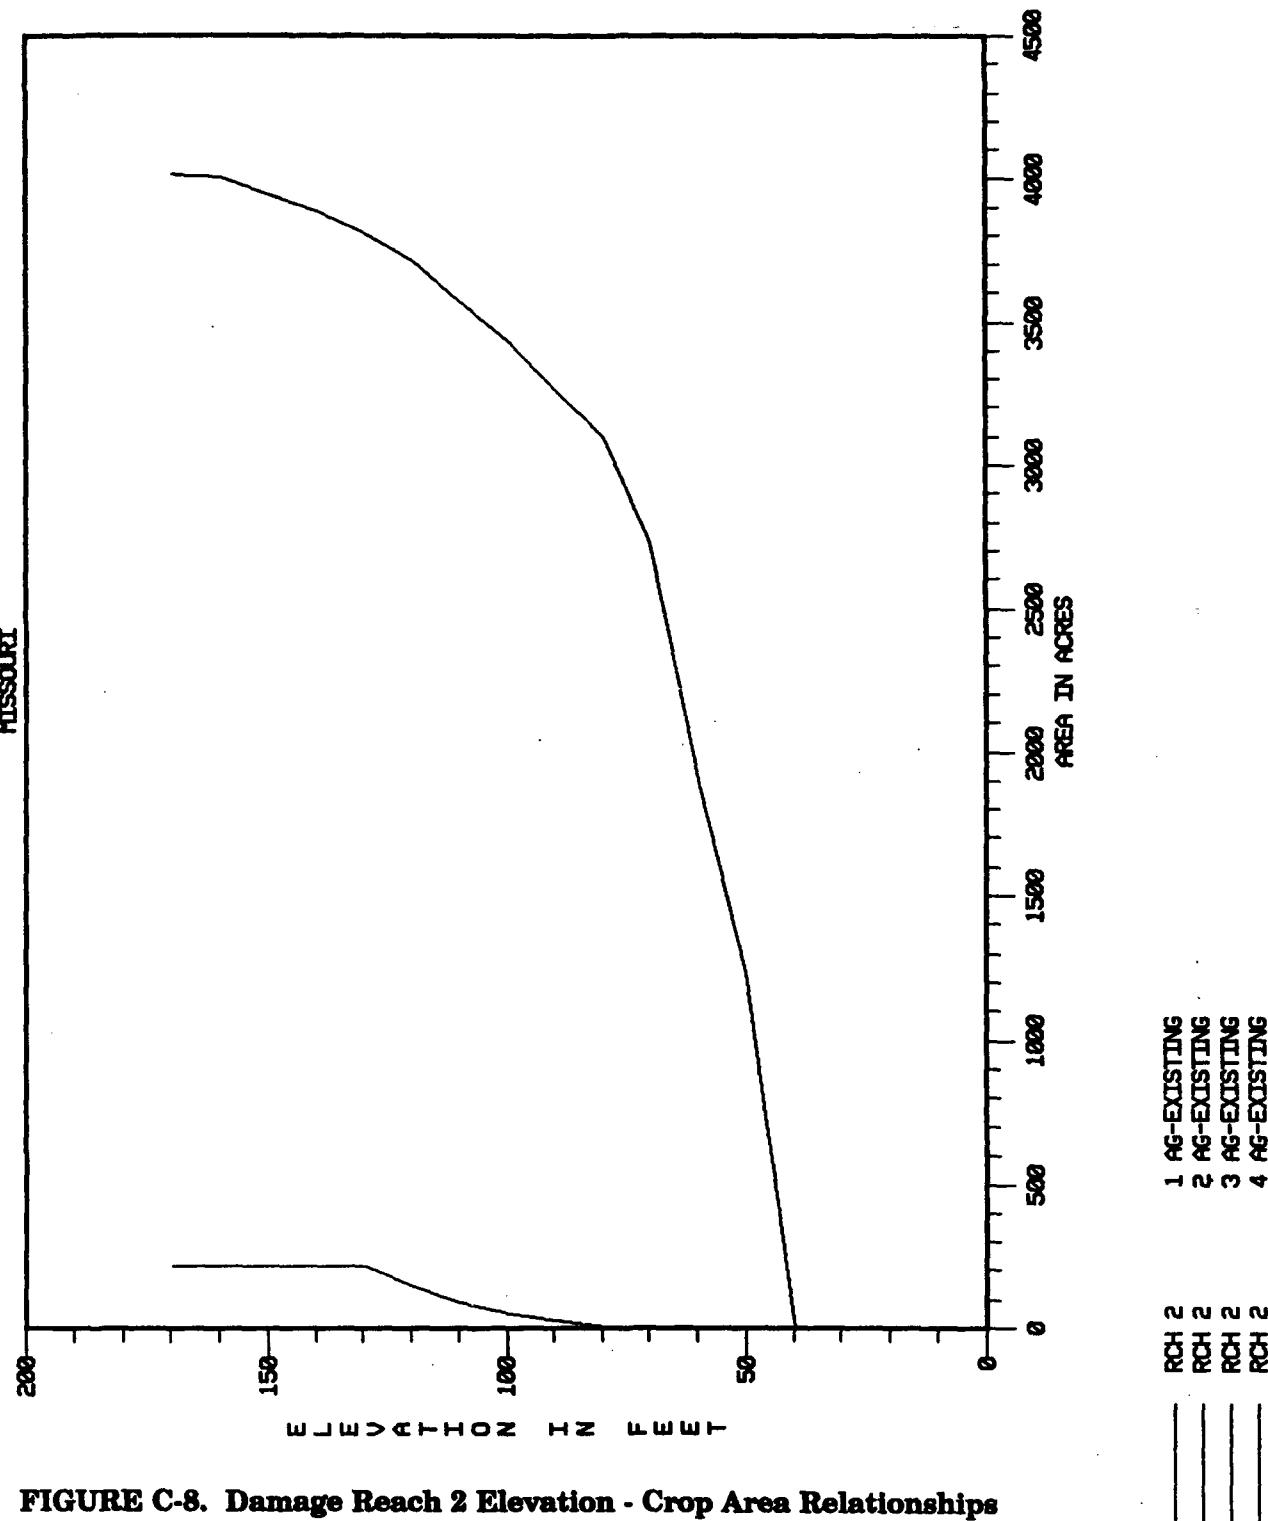


FIGURE C-8. Damage Reach 2 Elevation - Crop Area Relationships


27 JUL 92 09:38:19

MISSOURI

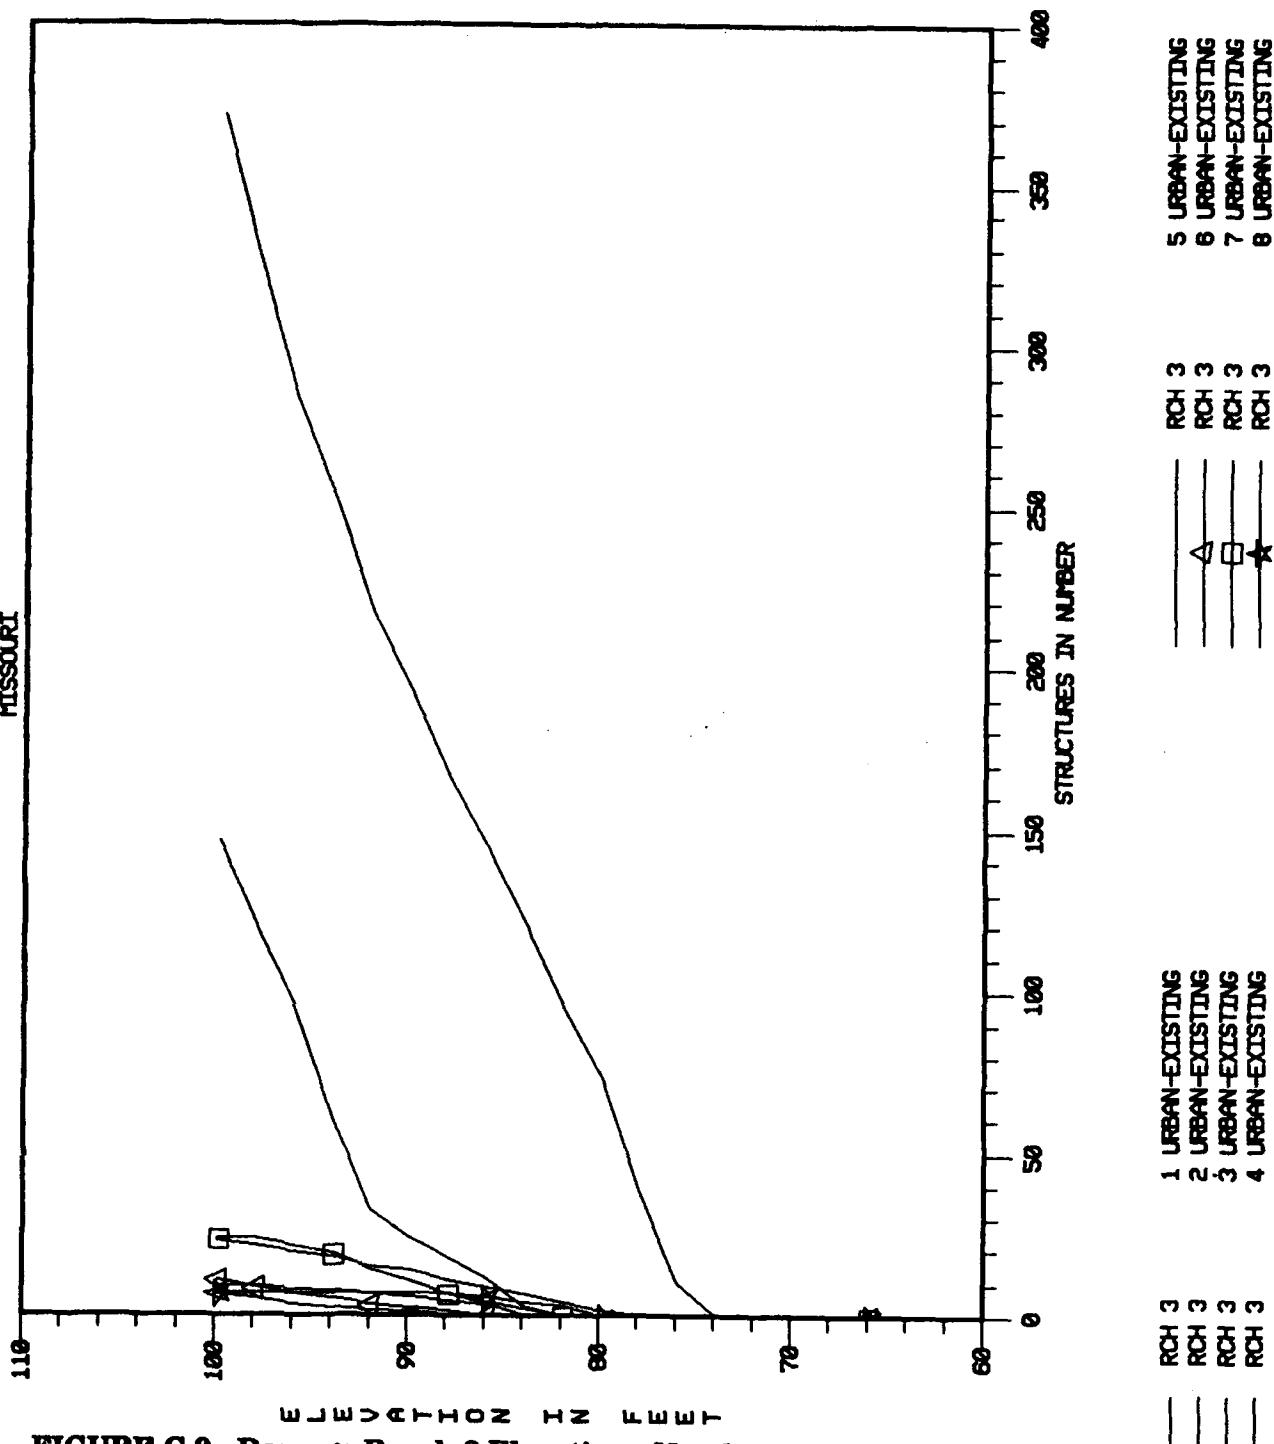

**FIGURE C-9. Damage Reach 3 Elevation - Number of Structures
by Categories Relationships**

27JUL92 09:20:32

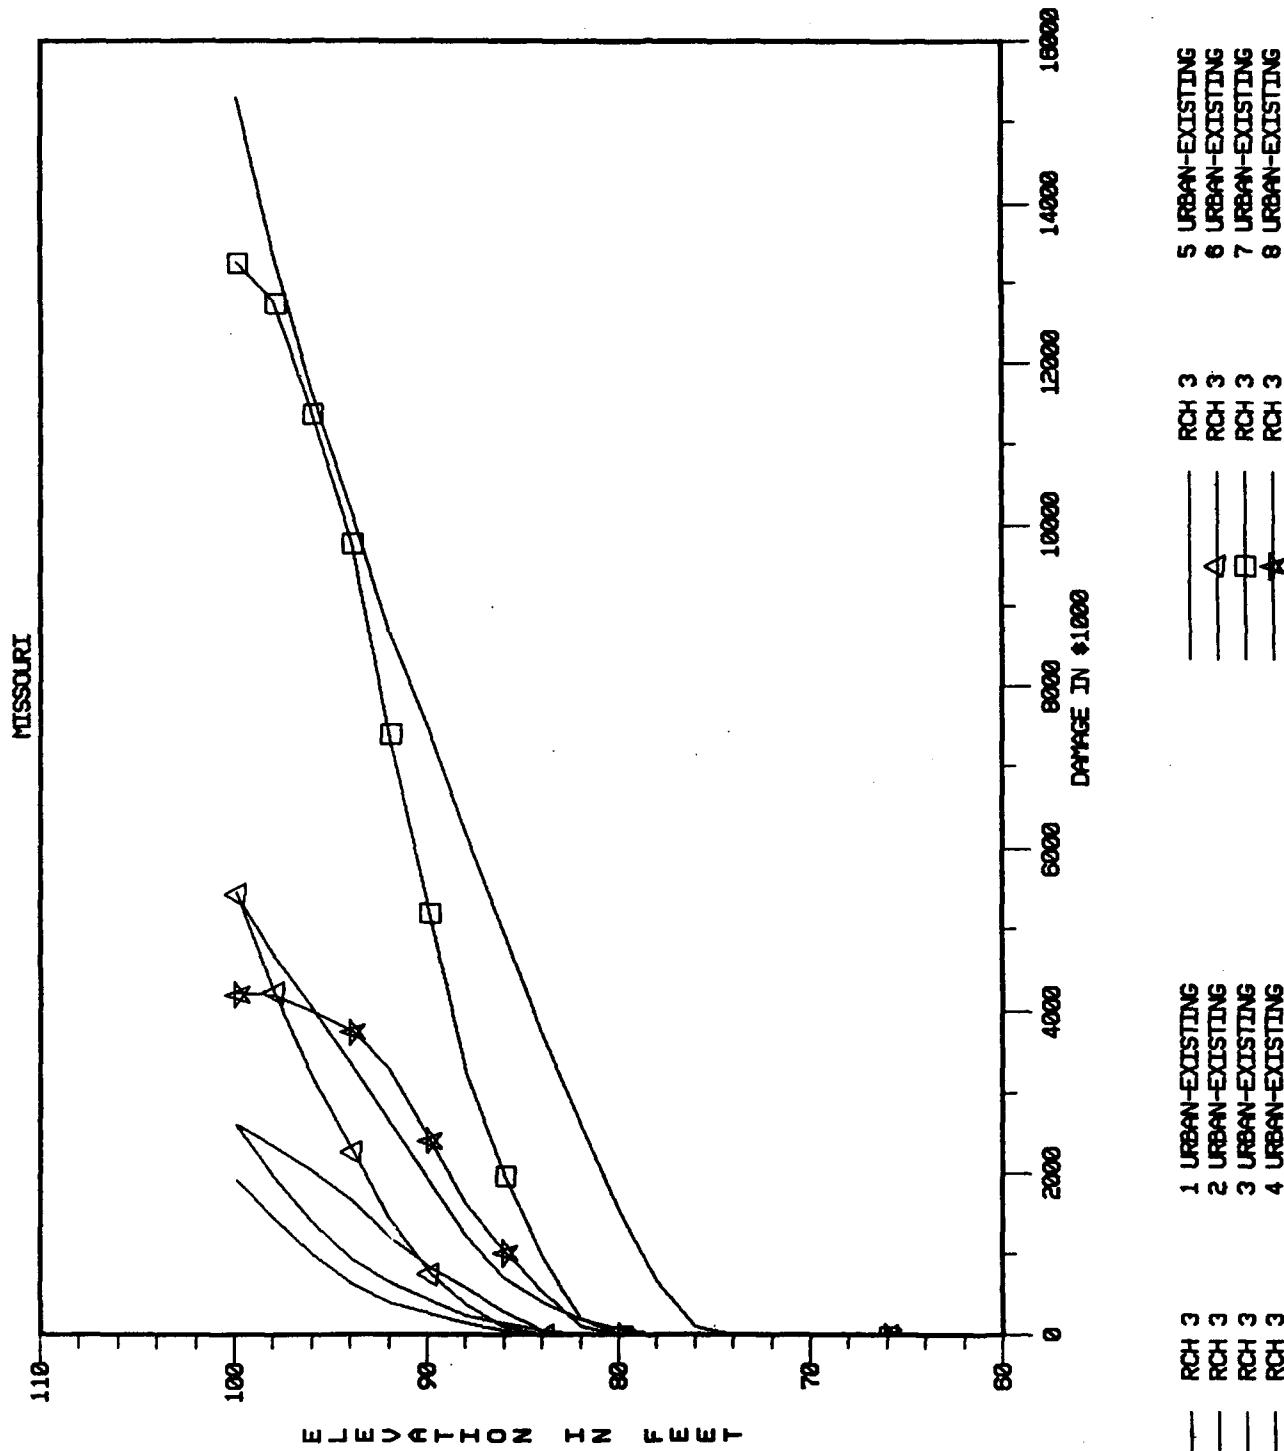

**FIGURE C-10. Damage Reach 3 Elevation - Urban Categories
Damage Relationships**

MISSOURI


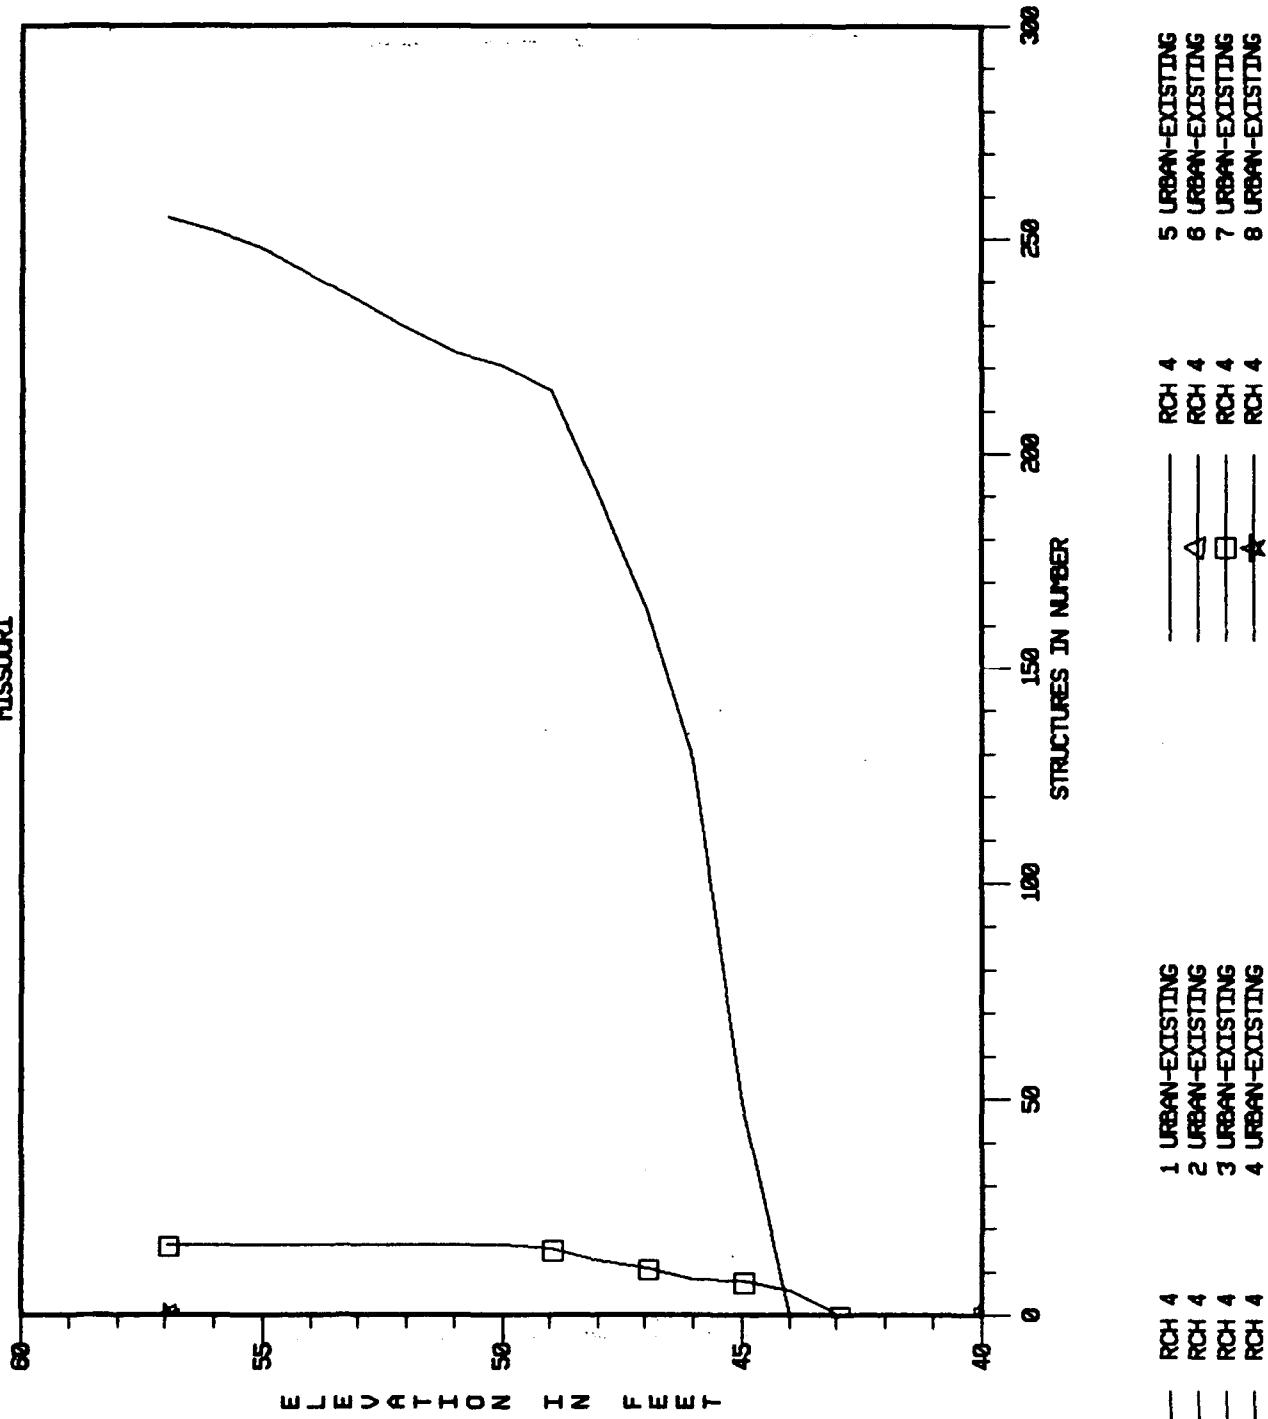


FIGURE C-11. Damage Reach 4 Elevation - Number of Structures by Categories Relationships

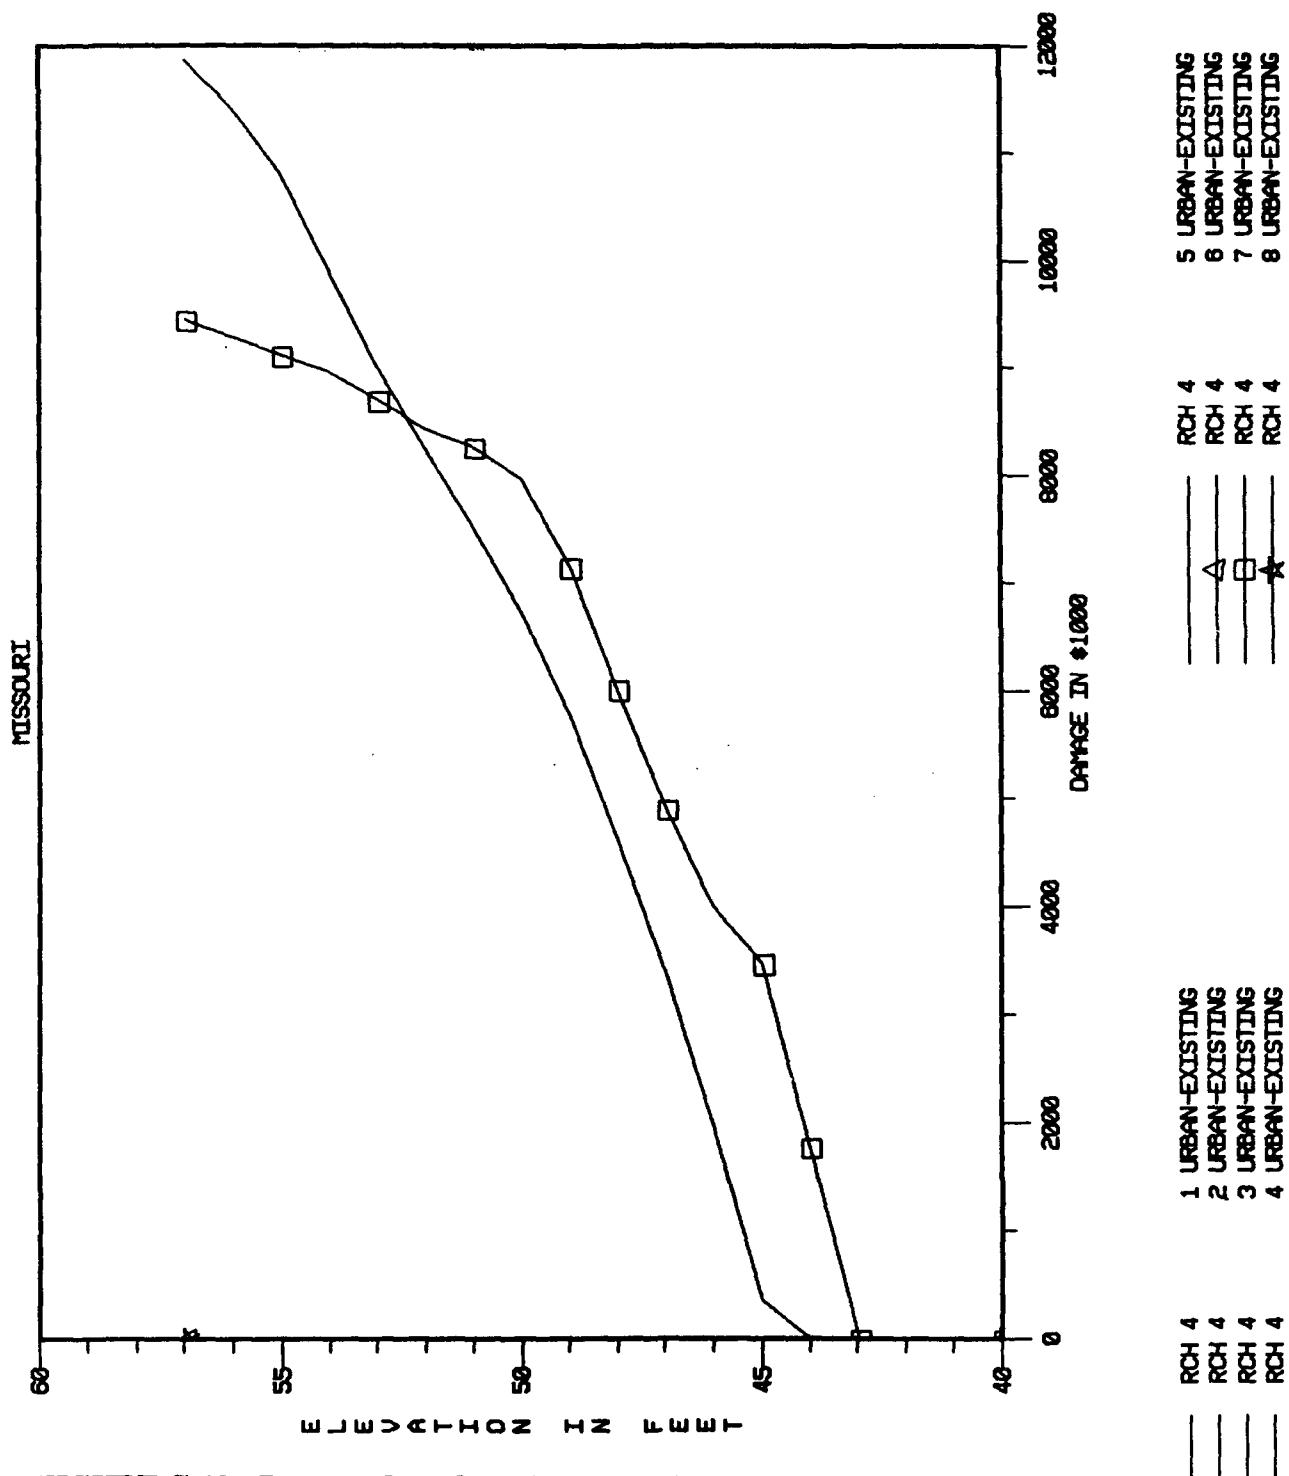

**FIGURE C-12. Damage Reach 4 Elevation - Urban Categories
Damage Relationships**

27JUL92 07:40:37

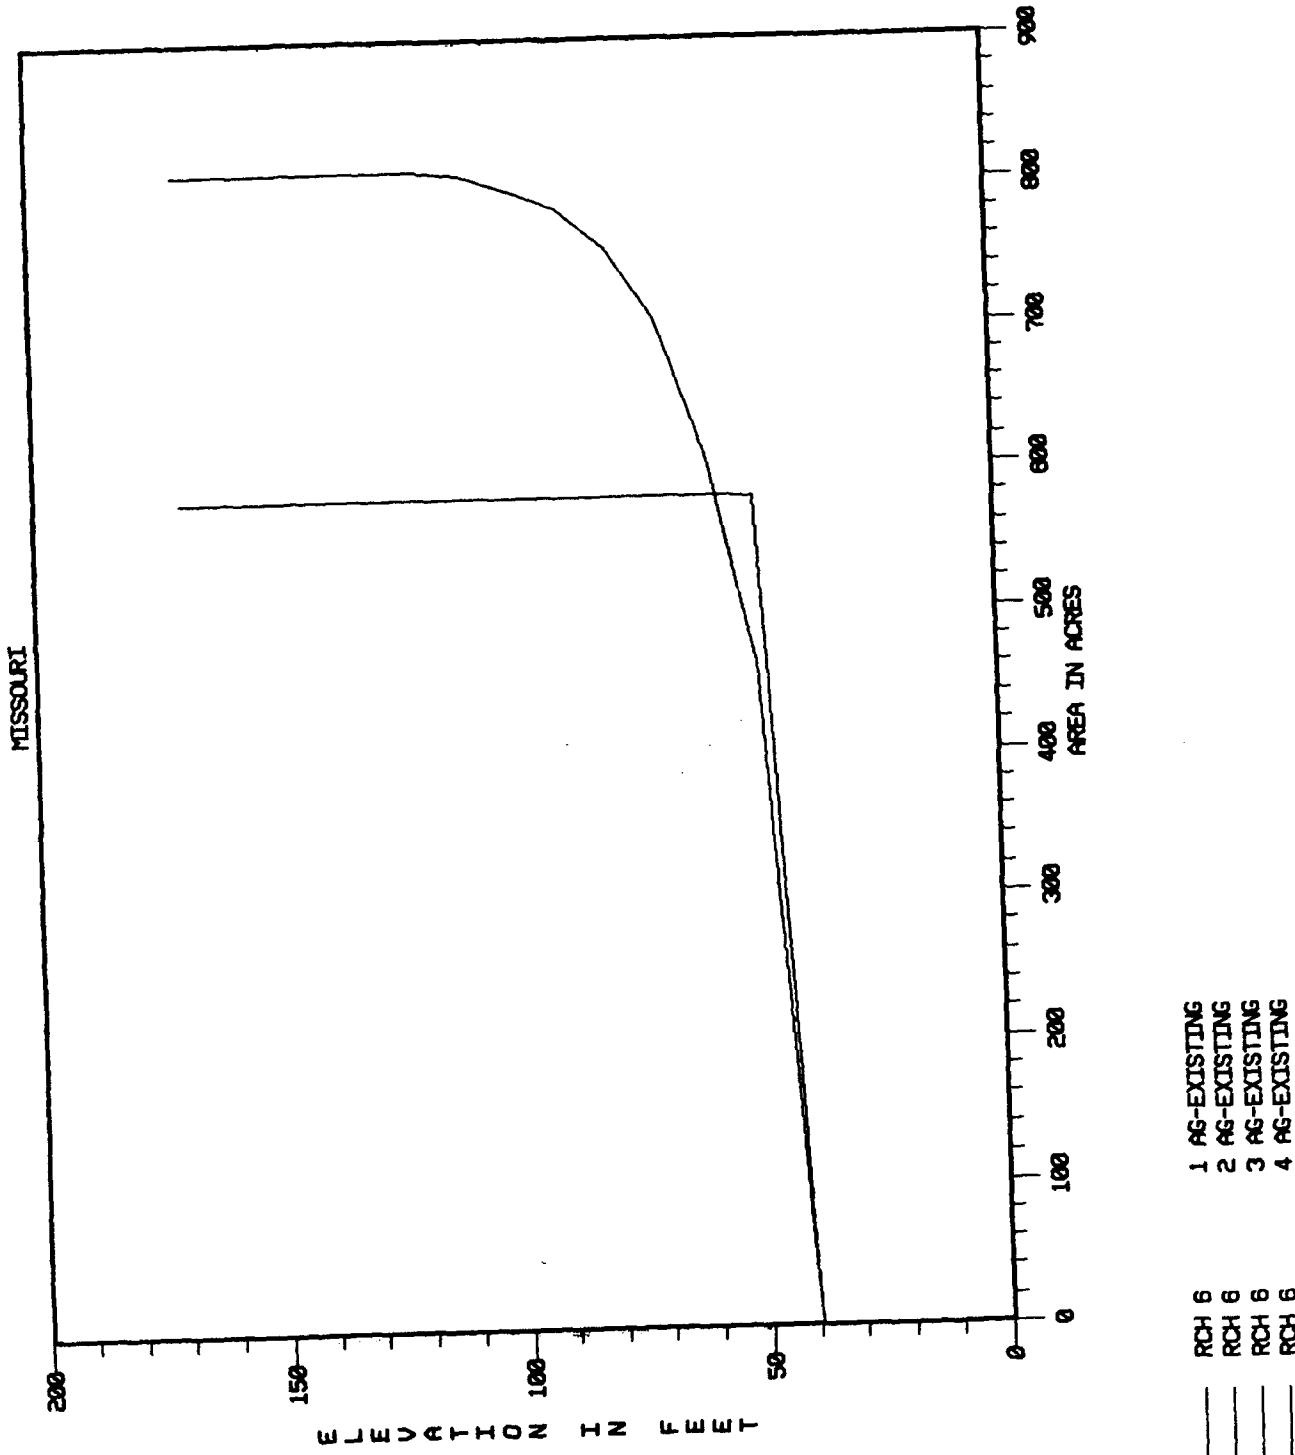


FIGURE C-13. Damage Reach 6 Elevation - Crop Area Relationships

27JUL92 07:48:39

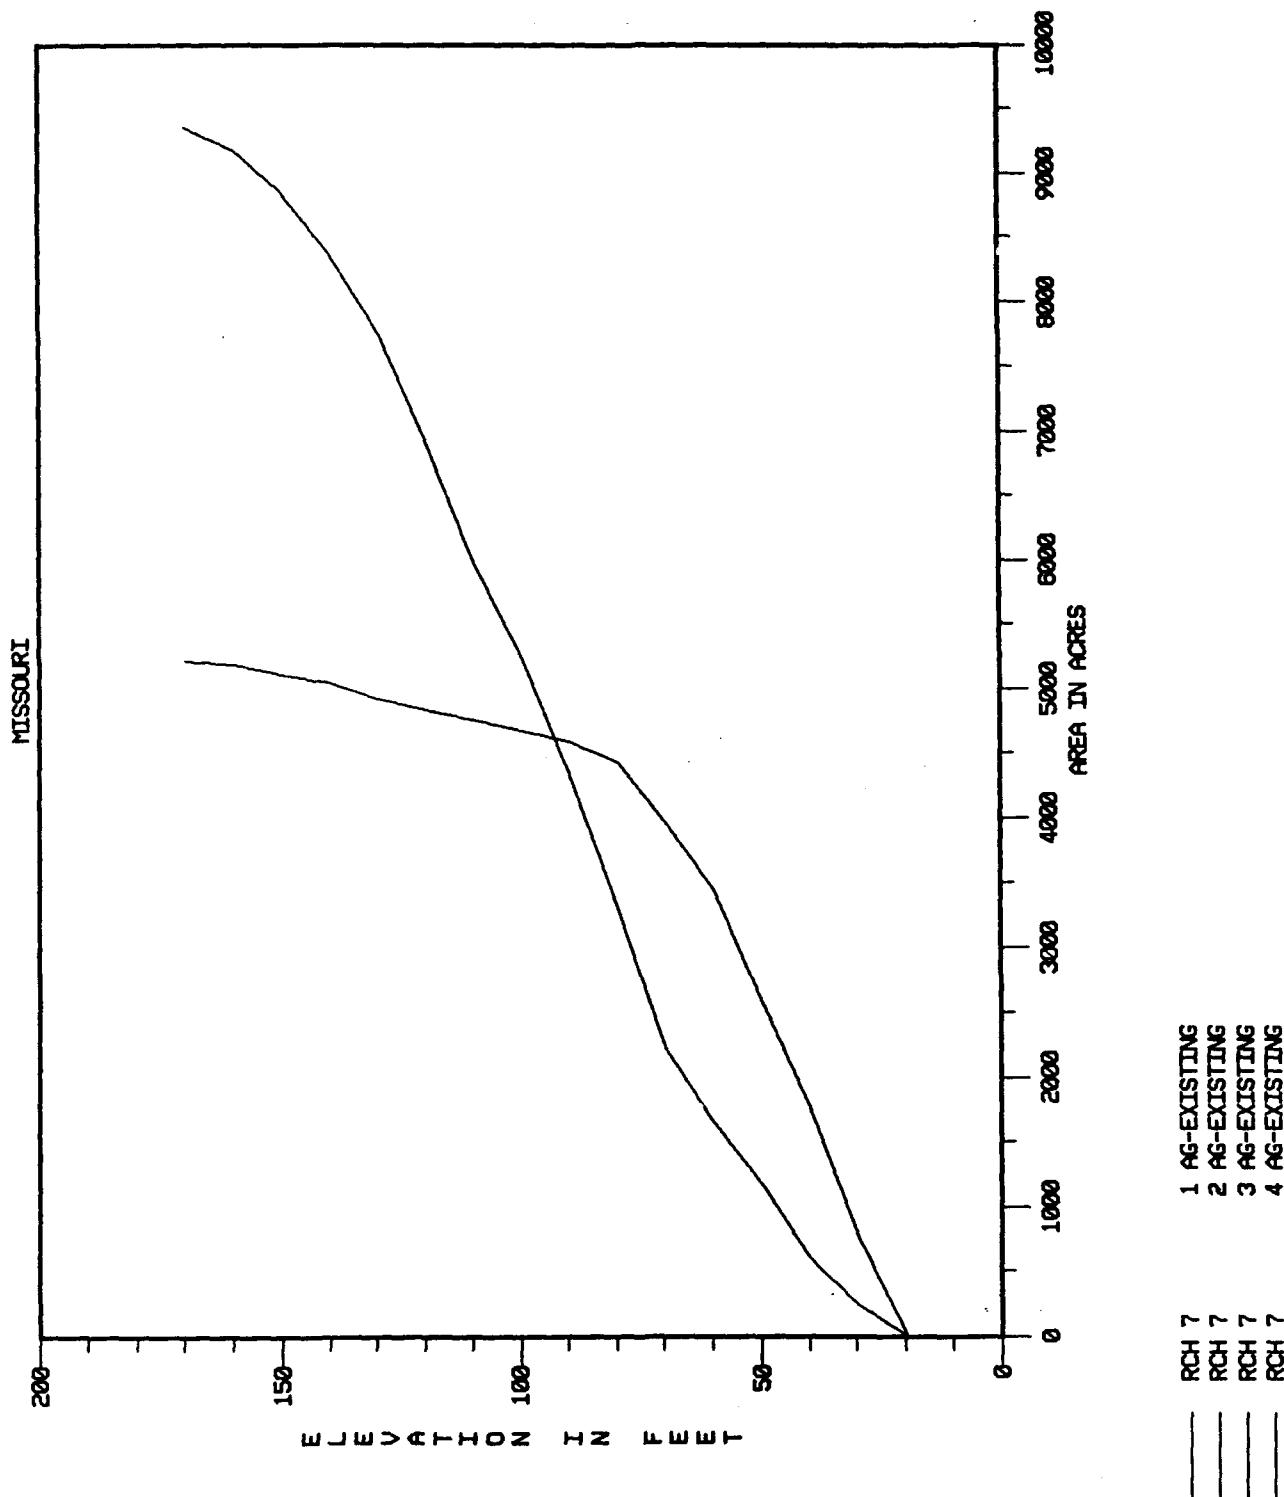


FIGURE C-14. Damage Reach 7 Elevation - Crop Area Relationships

27JUL92 08:23:10

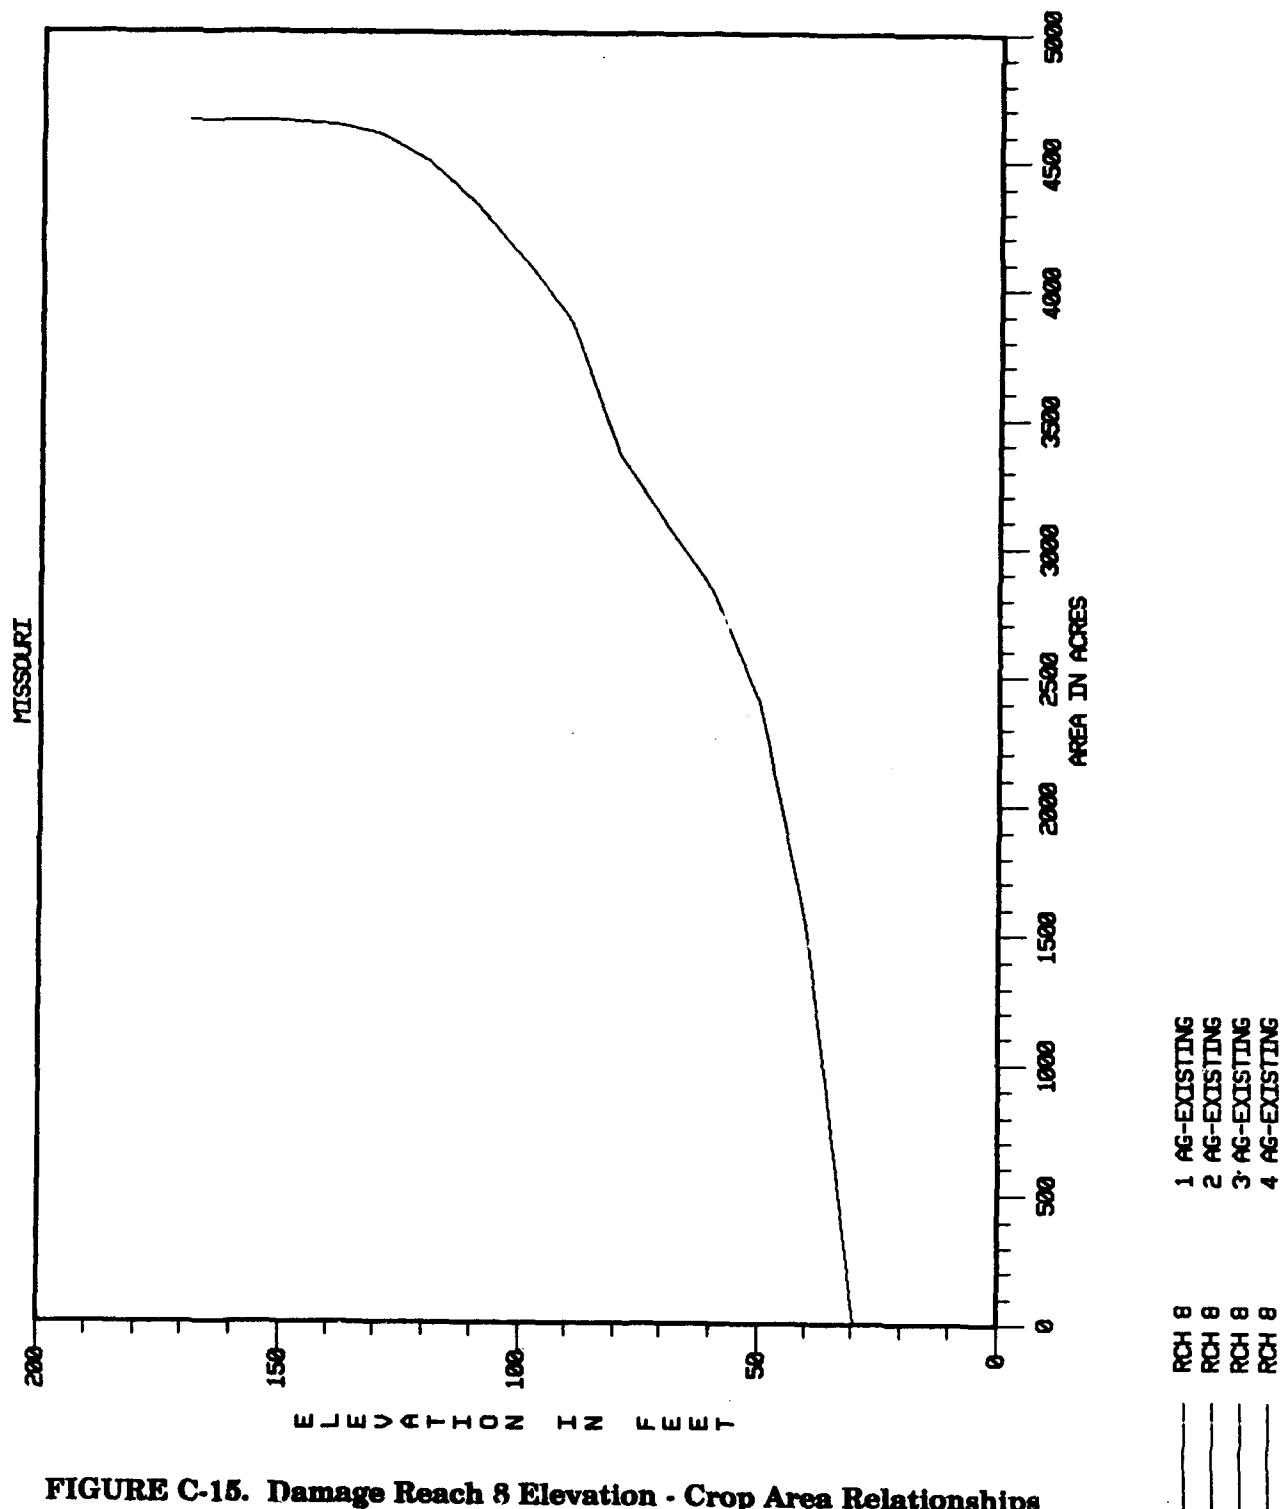


FIGURE C-15. Damage Reach 8 Elevation - Crop Area Relationships

27JUL92 08:19:22

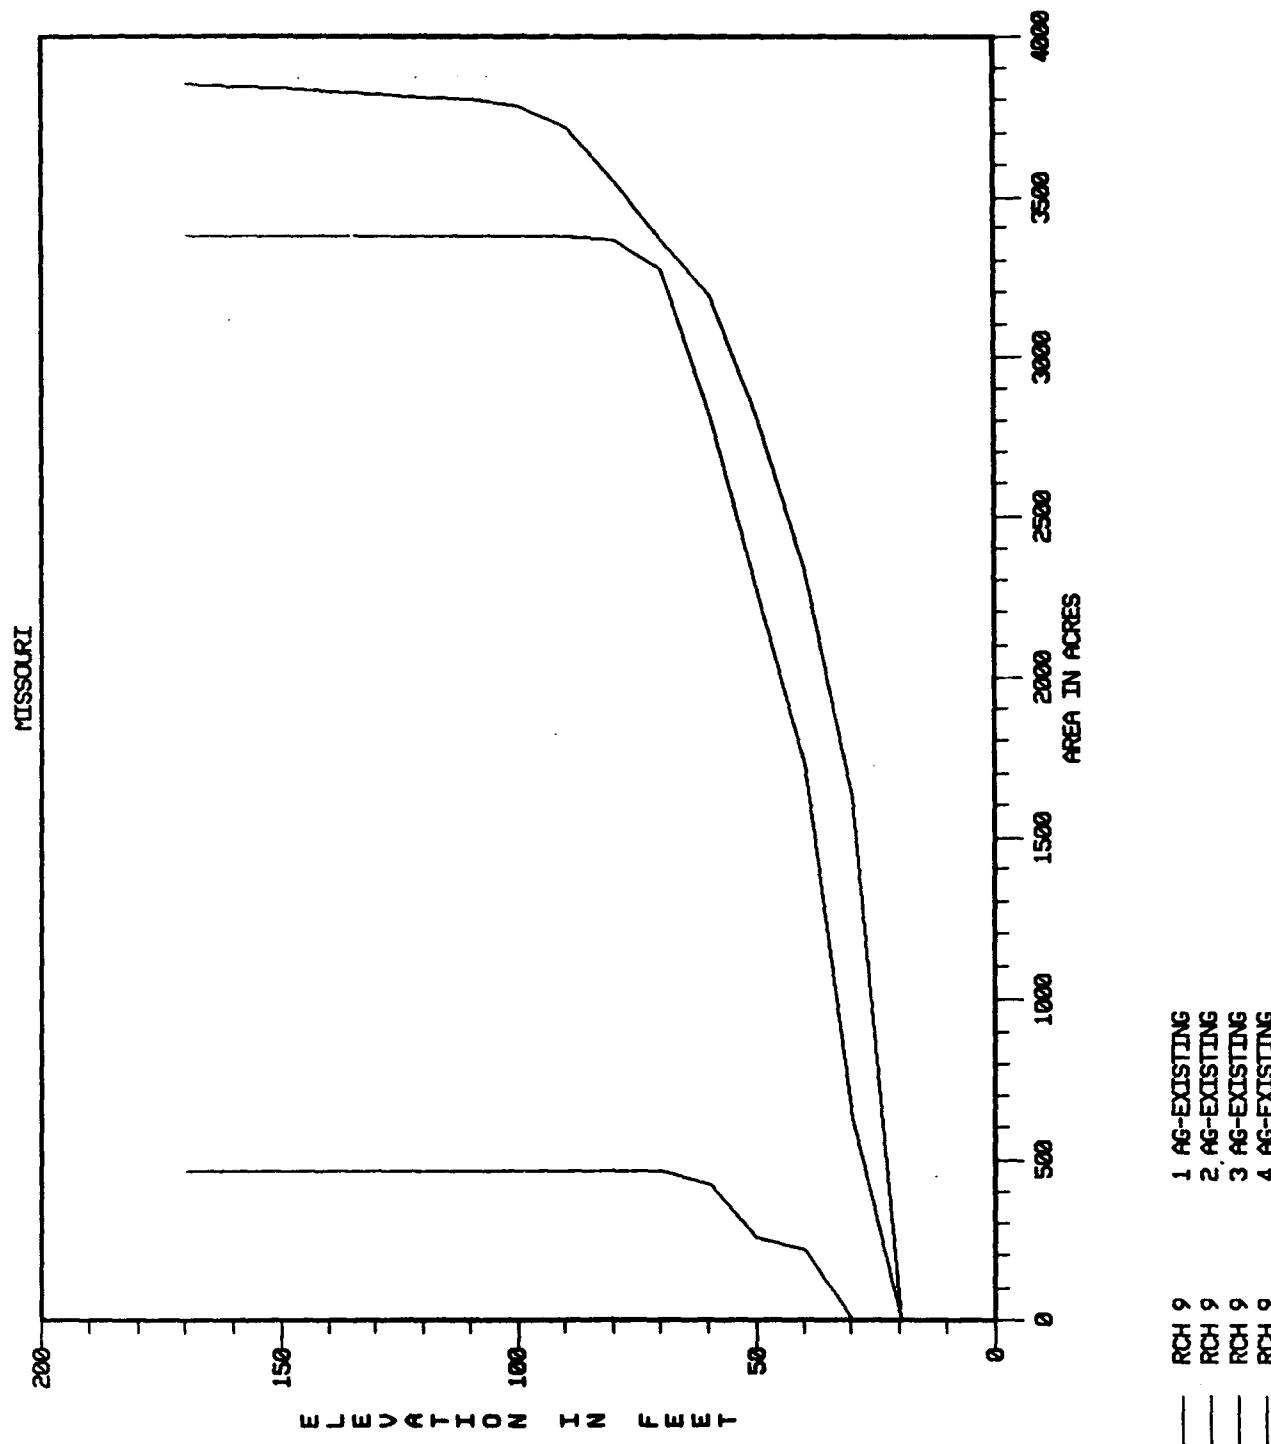


FIGURE C-16. Damage Reach 9 Elevation - Crop Area Relationships

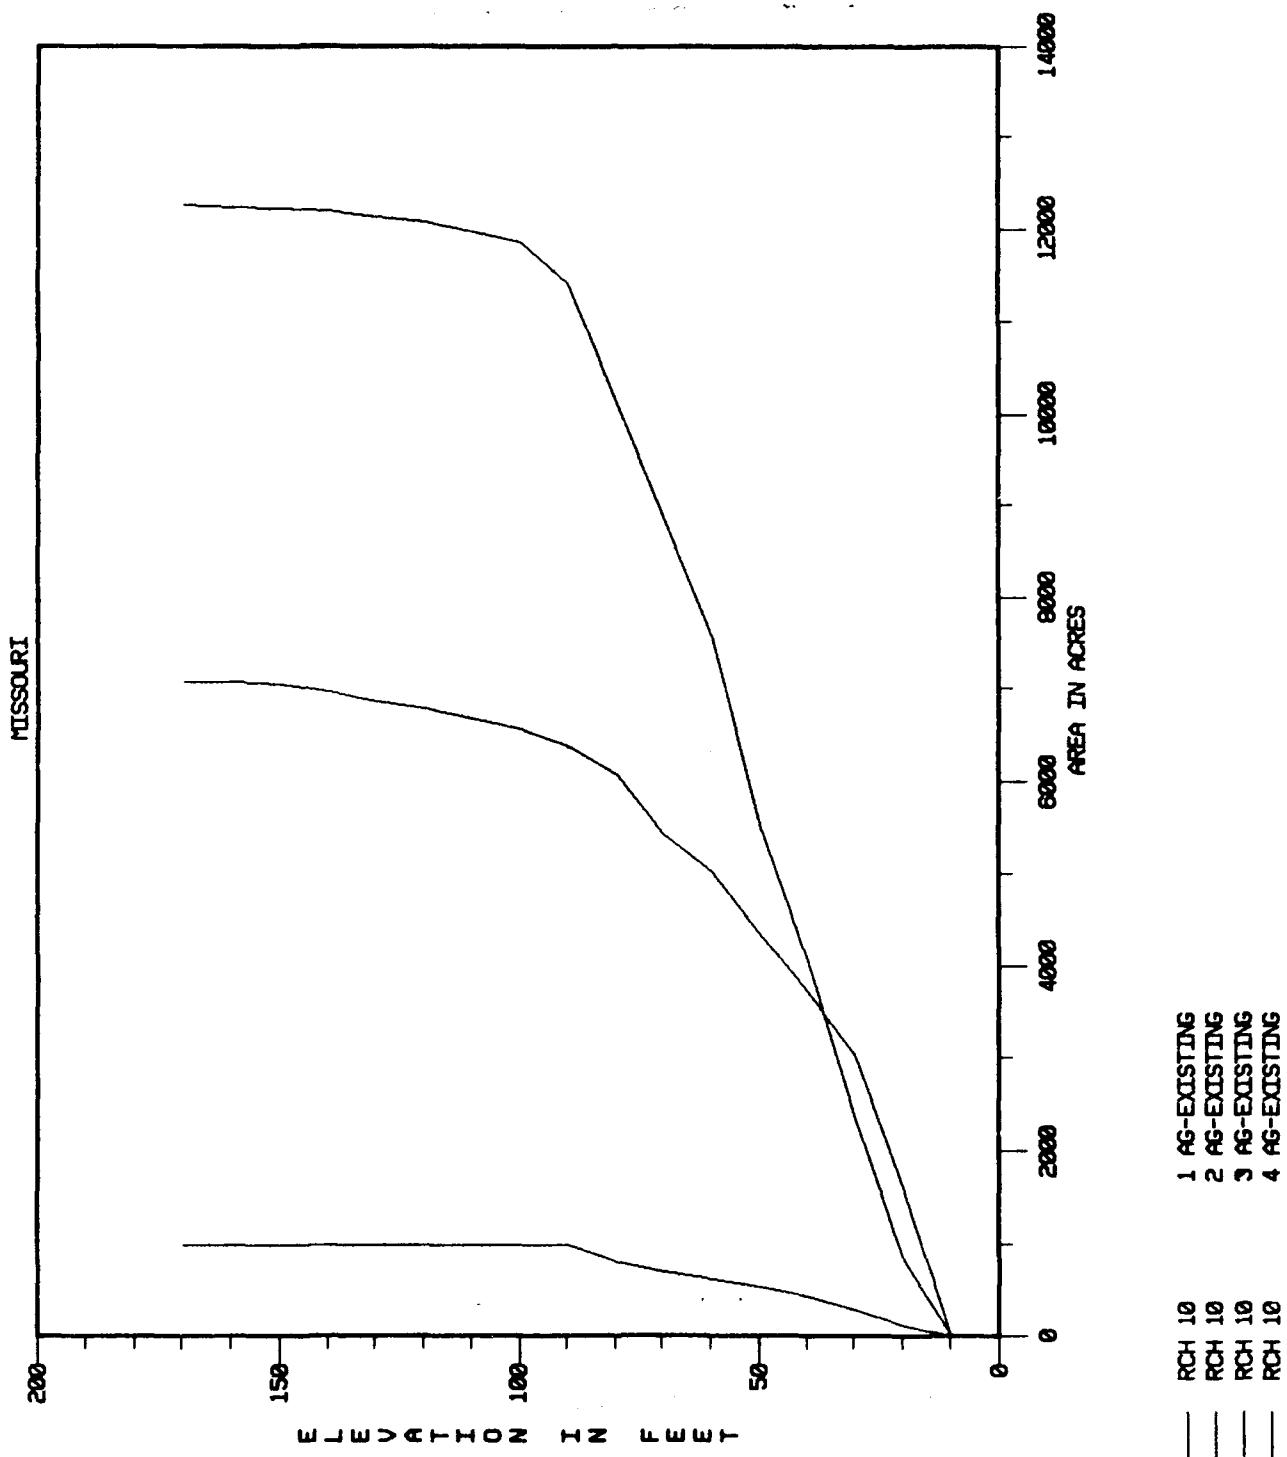


FIGURE C-17. Damage Reach 10 Elevation - Crop Area Relationships

27JUL92 08:54:11

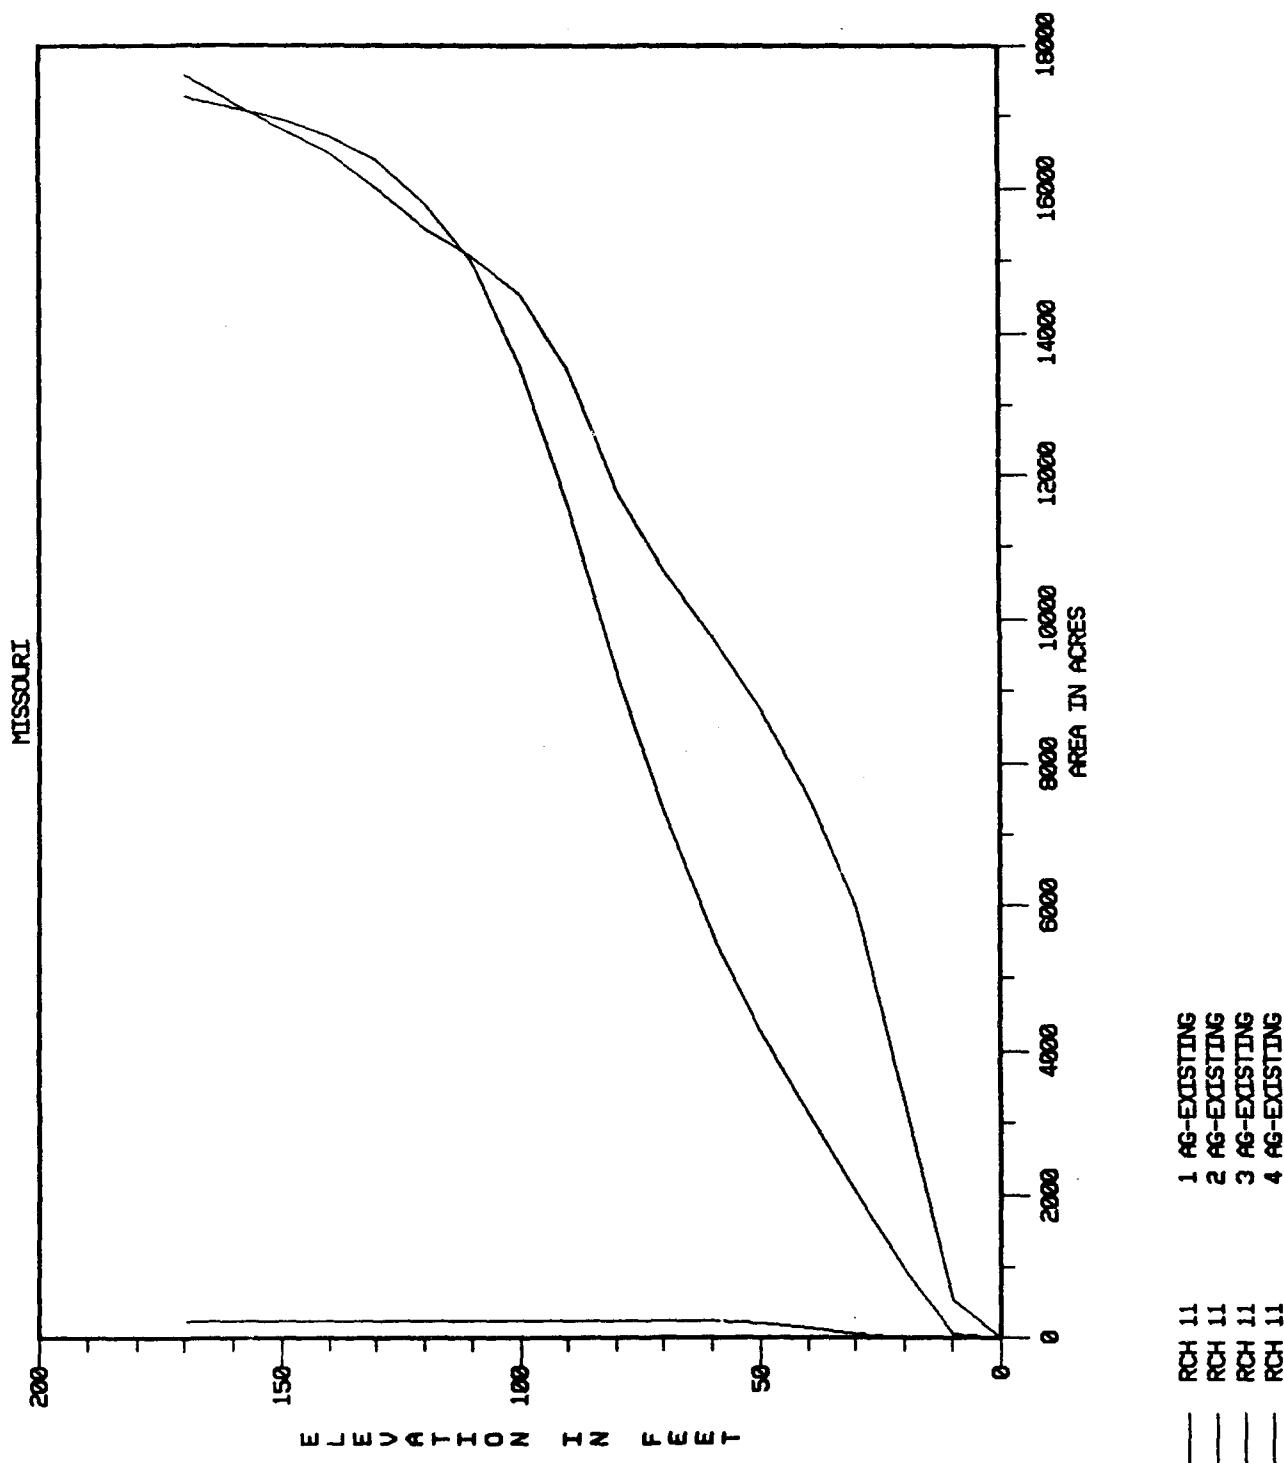


FIGURE C-18. Damage Reach 11 Elevation - Crop Area Relationships

27JUL92 09:02:46

MISSOURI

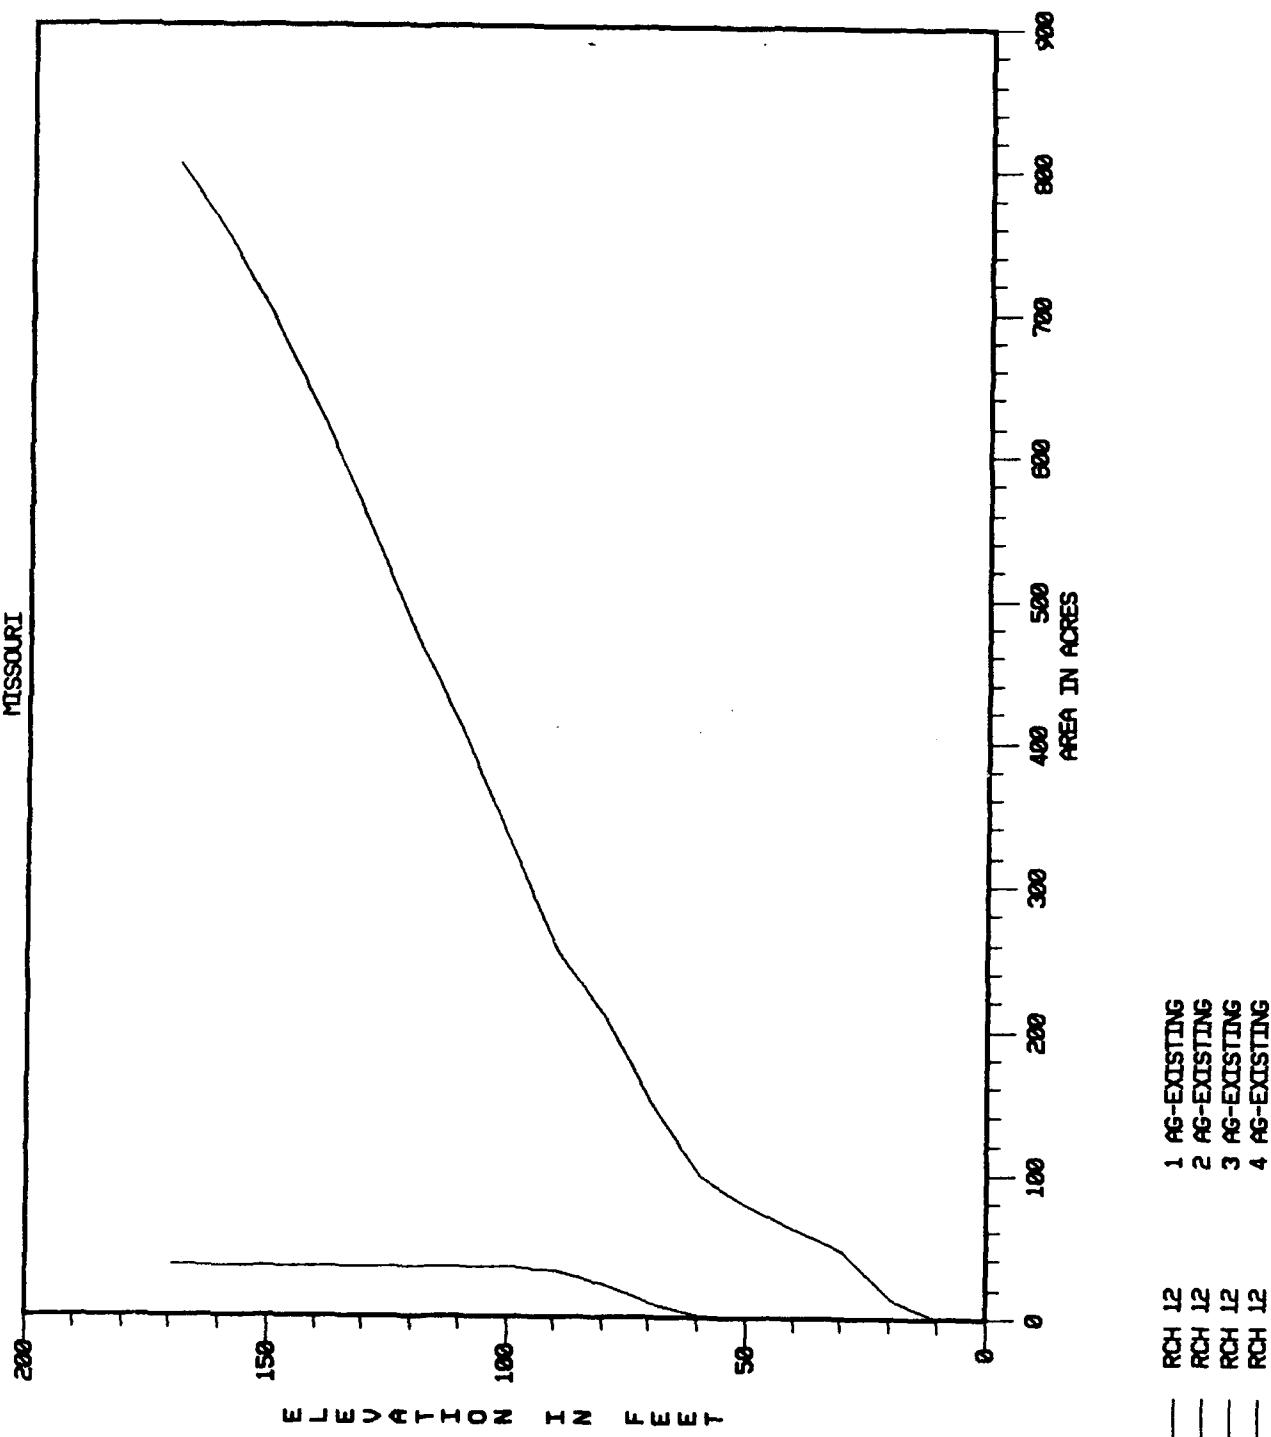


FIGURE C-19. Damage Reach 12 Elevation - Crop Area Relationships

27JUL92 09:10:01

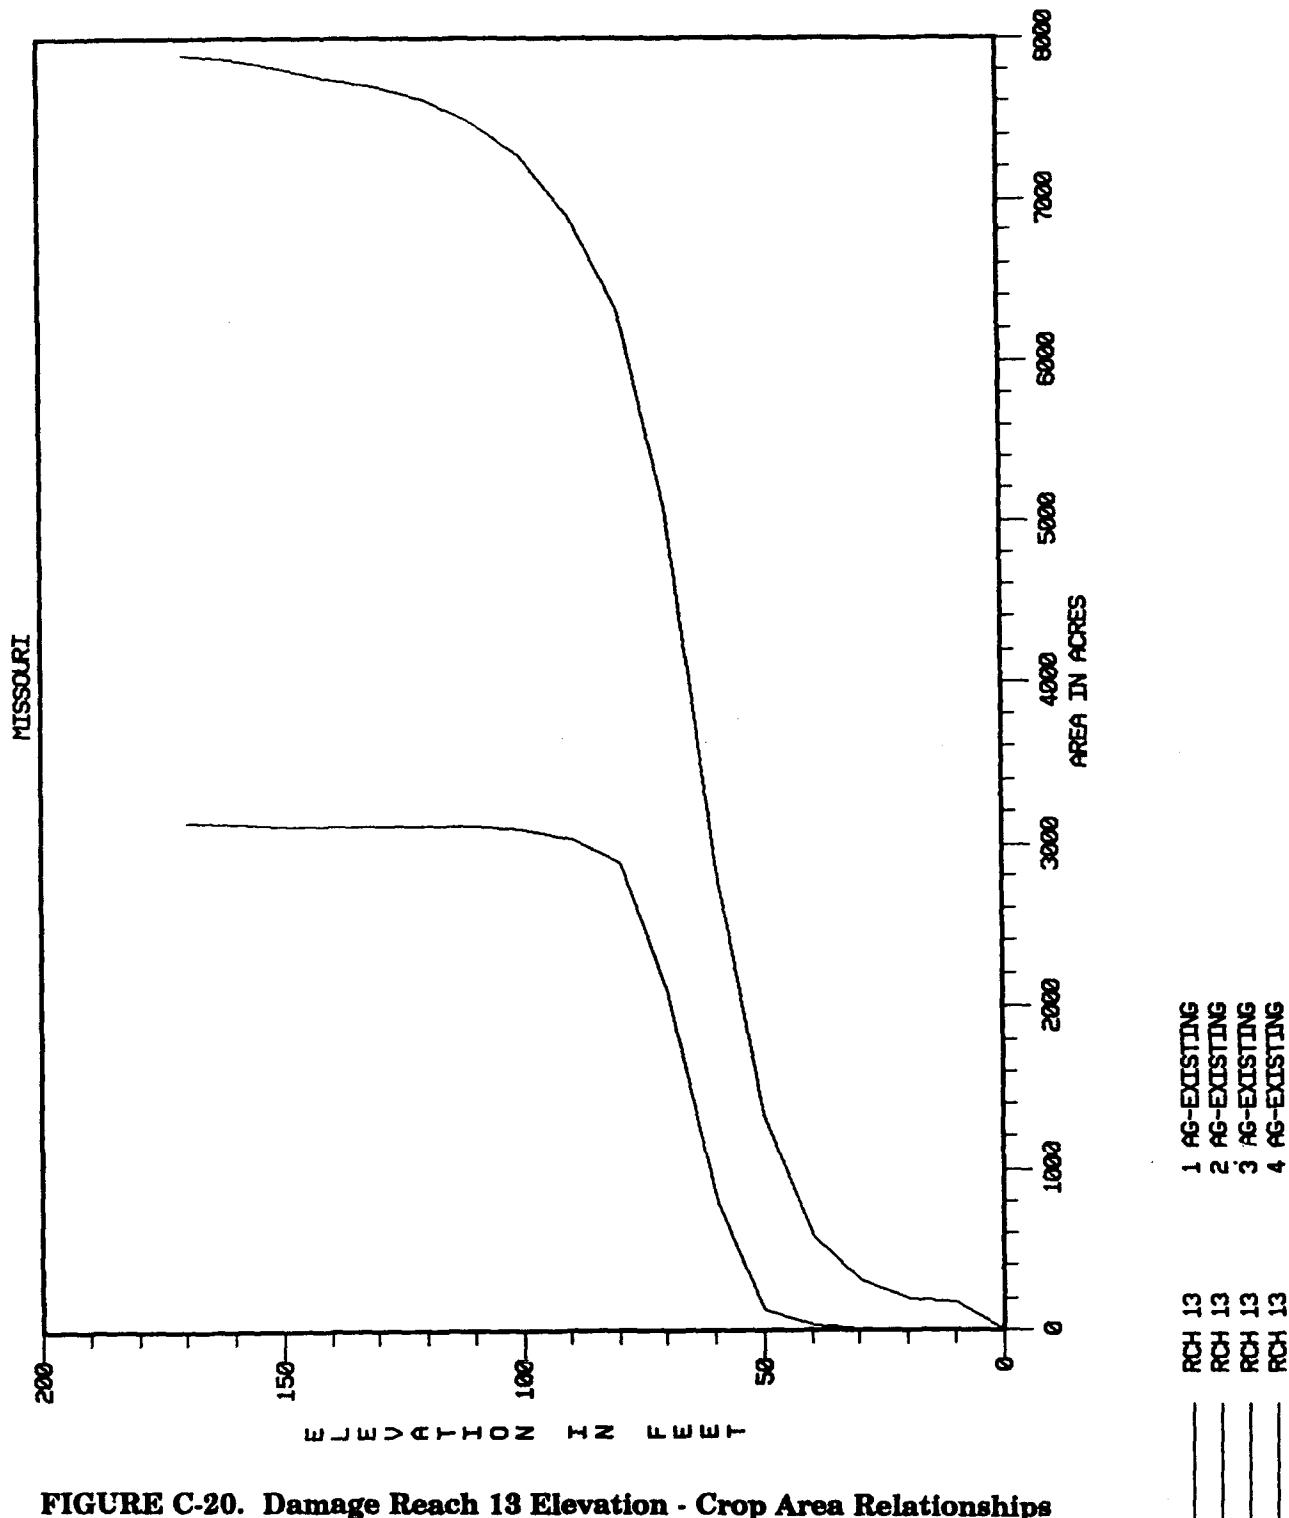


FIGURE C-20. Damage Reach 13 Elevation - Crop Area Relationships

APPENDIX D
HEC-PBA DATA

APPENDIX D

HEC-PBA DATA

Table of Contents

Section		Page
D-1.	HEC-PBA Input - Preprocessor and Analysis Program Input Files	81
D-2.	HEC-PBA Input - Crop Loss Functions	84
D-3.	HEC-PBA Input - Flood Hydrographs	89
D-4.	HEC-PBA Output - Preprocessor and analysis Programs	93

Figures

D-1.	Sorghum Crop Loss Function	85
D-2.	Oats Crop Loss Function	86
D-3.	Corn Crop Loss Function	87
D-4.	Wheat Crop Loss Function	88
D-5.	Regulated Stage Hydrograph at Gage 3	90
D-6.	Regulated Stage Hydrograph at Gage 4	91
D-7.	Regulated Stage Hydrograph at Gage 11	92

APPENDIX D

HEC-PBA DATA

D-1. HEC-PBA Input - Preprocessor and Analysis Program Input Files

Preprocessor Program Input Data

```

T1 MISSOURI RIVER
T2 OAHE DAM TO BIG BEND DAM IN SOUTH DAKOTA
T3 TEST DATA JUNE 1992
J1      0      0      0
BD OMAHA OMAHA DISTRICT
BS SD SOUTH DAKOTA
BC HUGH HUGHES COUNTY
BC STAN STANLEY COUNTY
BC LYMN LYMAN COUNTY
BC HYDE HYDE COUNTY
BC BUFF BUFFALO COUNTY
BB SUBA OPEN RIVER
BB SUBB LAKE SHARPE
BB CROW CRW RESERVATION
BB LBRU LBR RESERVATION
BW MISS MISSOURI RIVER
BG CONG1 REP TIM JOHNSON
BX PIER PIERRE
BX FTPR FORT PIERRE
BX LOWB LOWER BRULE
BX FTTM FORT THOMPSON
BX CHAM CHAMBERLAIN
GA GAGE 3
ZH    MISSOURI        GAGE 3          1DAY      REGULATED
GA    GAGE 4          GAGE 4          1DAY      REGULATED
GA    GAGE 11         GAGE 11         1DAY      REGULATED
ZH    MISSOURI         GAGE 11         1DAY      SPRING WHEAT
CR WHEAT   28  BUSHEL   3.15   16.00   5
CS WHEAT   90  115     140     7
ZC A=SOUTH DAKOTA B=WHEAT C=DAY-LOSS E=1992
CD      0      1      3      7
CR CORN    91  BUSHEL   2.20   28.00   5
CS CORN   120     145    165     10
ZC A=SOUTH DAKOTA B=CORN C=DAY-LOSS E=1992
CD      0      1      3      7
CR OATS    50  BUSHEL   1.20   23.00   5
CS OATS   90    127    145     7
ZC A=SOUTH DAKOTA B=OATS C=DAY-LOSS E=1992
CD      0      1      3      7
CR MILO    41  BUSHEL   2.04   18.00   5
CS MILO   125     161    180     7
ZC A=SOUTH DAKOTA B=SORGHUM C=DAY-LOSS E=1992
CD      0      1      3      7
DR RCH 1  GAGE 3      0 HUGHES COUNTY, US OF PIERRE
DB OMAHA   SD   HUGH      MISS     SUBA   CONG1
DS OAHE OAHE RESERVOIR
FS      40
ZR A=MISSOURI B=RCH 1  C=ELEVATION-CURVES E=1992 F=AG-EXISTING
CP WHEAT   18

```

CP CORN 36
 CP OATS 14
 CP MILO 10
 DR RCH 2 GAGE 4 O STANLEY COUNTY, DS OF FORT PIERRE
 DB OMAHA SD STAN MISS SUBA CONG1
 DS OAHE OAHE RESERVOIR
 FS 40
 ZR A=MISSOURI B=RCH 2 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
 CP WHEAT 29
 CP OATS 21
 CP MILO 50
 DR RCH 3 GAGE 3 O CITY OF PIERRE
 DB OMAHA SD HUGH MISS SUBA CONG1
 DS OAHE OAHE RESERVOIR
 FS 66
 ZR A=MISSOURI B=RCH 3 C=ELEVATION-CURVES E=1992 F=URBAN-EXISTING
 UC RES 180 RESIDENTIAL
 UC COM 180 COMMERCIAL
 UC IND 180 INDUSTRIAL
 UC PUB 180 PUBLIC WORKS
 UC OTHER 30 OPEN SPACE
 DR RCH 4 GAGE 4 O CITY OF FORT PIERRE
 DB OMAHA SD HUGH MISS SUBA CONG1
 DS OAHE OAHE RESERVOIR
 FS 40
 ZR A=MISSOURI B=RCH 4 C=ELEVATION-CURVES E=1992 F=URBAN-EXISTING
 UC RES 180 RESIDENTIAL
 UC COM 180 COMMERCIAL
 UC IND 180 INDUSTRIAL
 UC PUB 180 PUBLIC WORKS
 UC OTHER 30 OPEN SPACE
 DR RCH 6 GAGE 4 O STANLEY COUNTY DS OF FORT PIERRE
 DB OMAHA SD STAN MISS SUBA CONG1
 DS OAHE OAHE RESERVOIR
 FS 40
 ZR A=MISSOURI B=RCH 6 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
 CP WHEAT 29
 CP OATS 21
 CP MILO 50
 DR RCH 7 GAGE 11 O HUGHES COUNTY, DS OF PIERRE
 DB OMAHA SD HUGH MISS SUBB CONG1
 DS OAHE OAHE RESERVOIR
 FS 20
 ZR A=MISSOURI B=RCH 7 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
 CP WHEAT 18
 CP CORN 36
 CP OATS 14
 CP MILO 10
 DR RCH 8 GAGE 11 O STANLEY COUNTY, DS OF FORT PIERRE
 DB OMAHA SD STAN MISS SUBB CONG1
 DS OAHE OAHE RESERVOIR
 FS 30
 ZR A=MISSOURI B=RCH 8 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
 CP WHEAT 29
 CP OATS 21
 CP MILO 50
 DR RCH 9 GAGE 11 O LOWER BRULE RESERVATION, STANLEY COUNTY
 DB OMAHA SD STAN MISS LBRU CONG1
 DS OAHE OAHE RESERVOIR
 FS 20
 ZR A=MISSOURI B=RCH 9 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
 CP WHEAT 29
 CP OATS 21
 CP MILO 50
 DR RCH10 GAGE 11 O CROW CREEK RESERVATION, HUGHES COUNTY

DB OMAHA SD HUGH MISS CROW CONG1
DS OAHE OAHE RESERVOIR
FS 10
ZR A=MISSOURI B=RCH 10 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
CP WHEAT 18
CP CORN 36
CP OATS 14
CP MILO 10
DR RCH11 GAGE 11 O LOWER BRULE RESERVATION, LYMAN COUNTY
DB OMAHA SD LYMN MISS LBRU CONG1
DS OAHE OAHE RESERVOIR
FS 0
ZR A=MISSOURI B=RCH 11 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
CP CORN 16
CP OATS 17
CP MILO 67
DR RCH12 GAGE 11 O CROW CREEK RESERVATION, HYDE COUNTY
DB OMAHA SD HYDE MISS CROW CONG1
DS OAHE OAHE RESERVOIR
FS 10
ZR A=MISSOURI B=RCH 12 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
CP WHEAT 29
CP OATS 36
CP MILO 17
DR RCH13 GAGE 11 O CROW CREEK RESERVATION, BUFFALO COUNTY
DB OMAHA SD BUFF MISS CROW CONG1
DS OAHE OAHE RESERVOIR
FS 0
ZR A=MISSOURI B=RCH 13 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
CP WHEAT 14
CP CORN 39
CP OATS 12
CP MILO 25
EJ

D-2. HEC-PBA Input - Crop Loss Functions

30JUL92 08:54:39

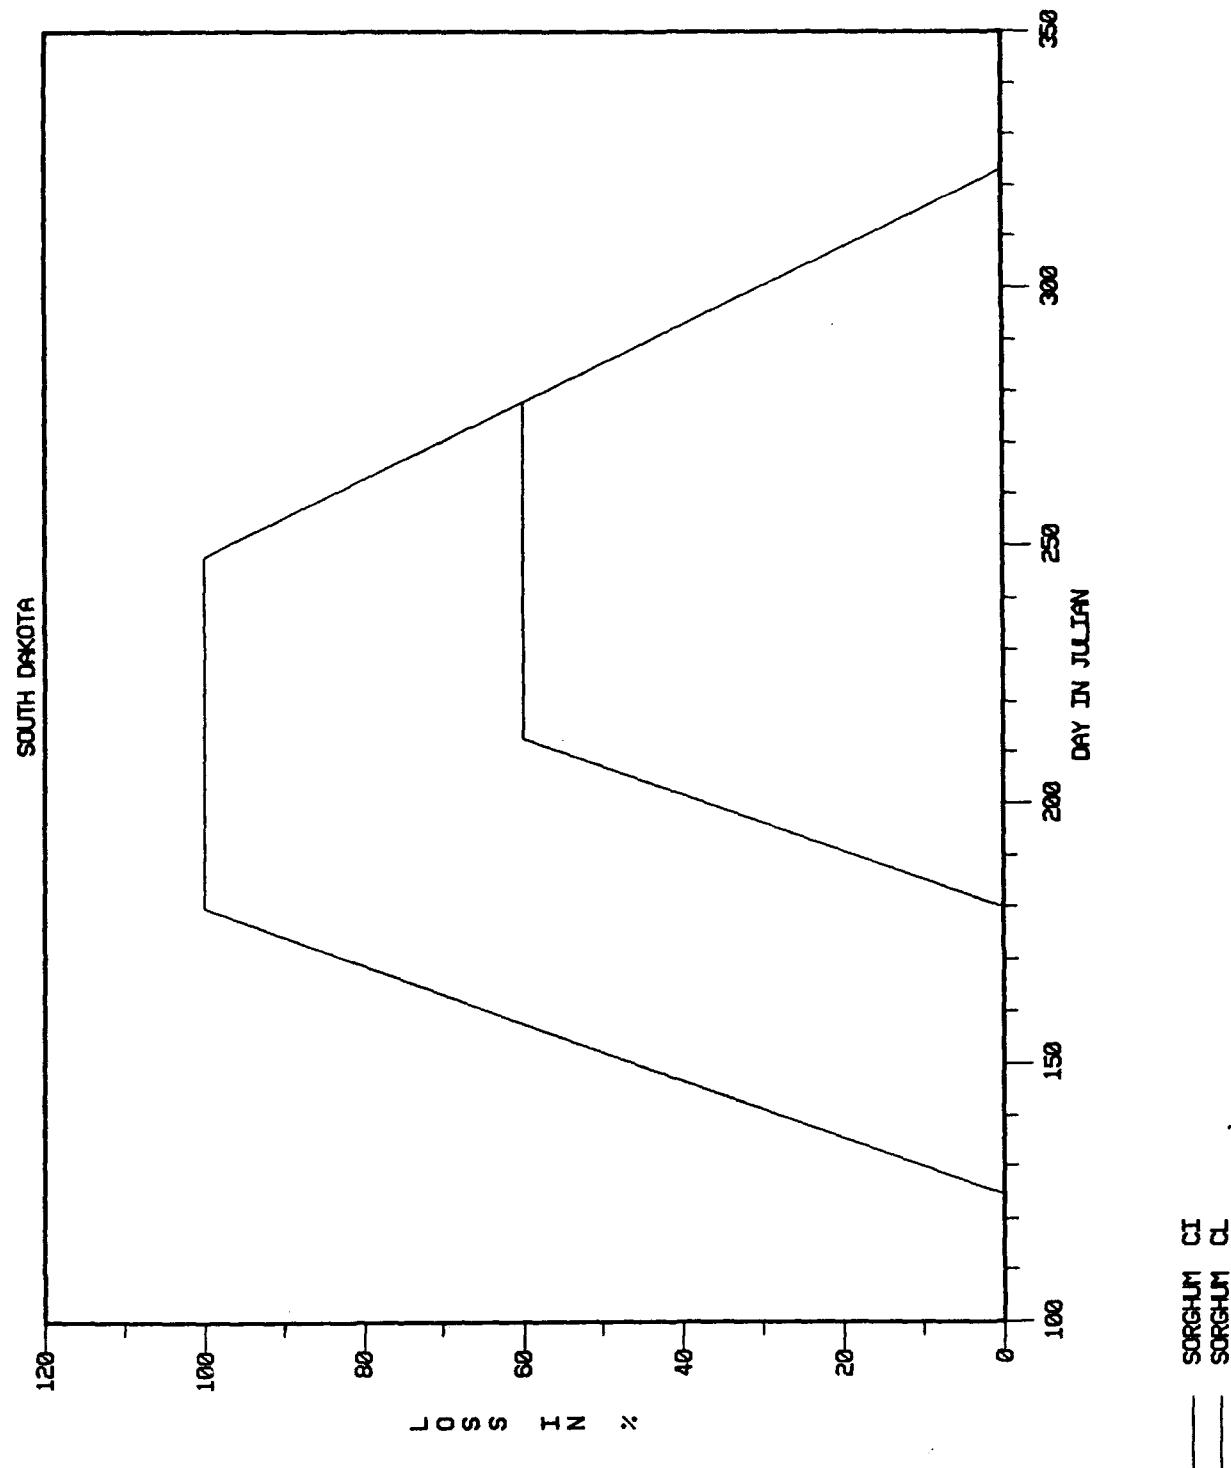


FIGURE D-1. Sorghum Crop Loss Function

30 JUL 92 08:48:35

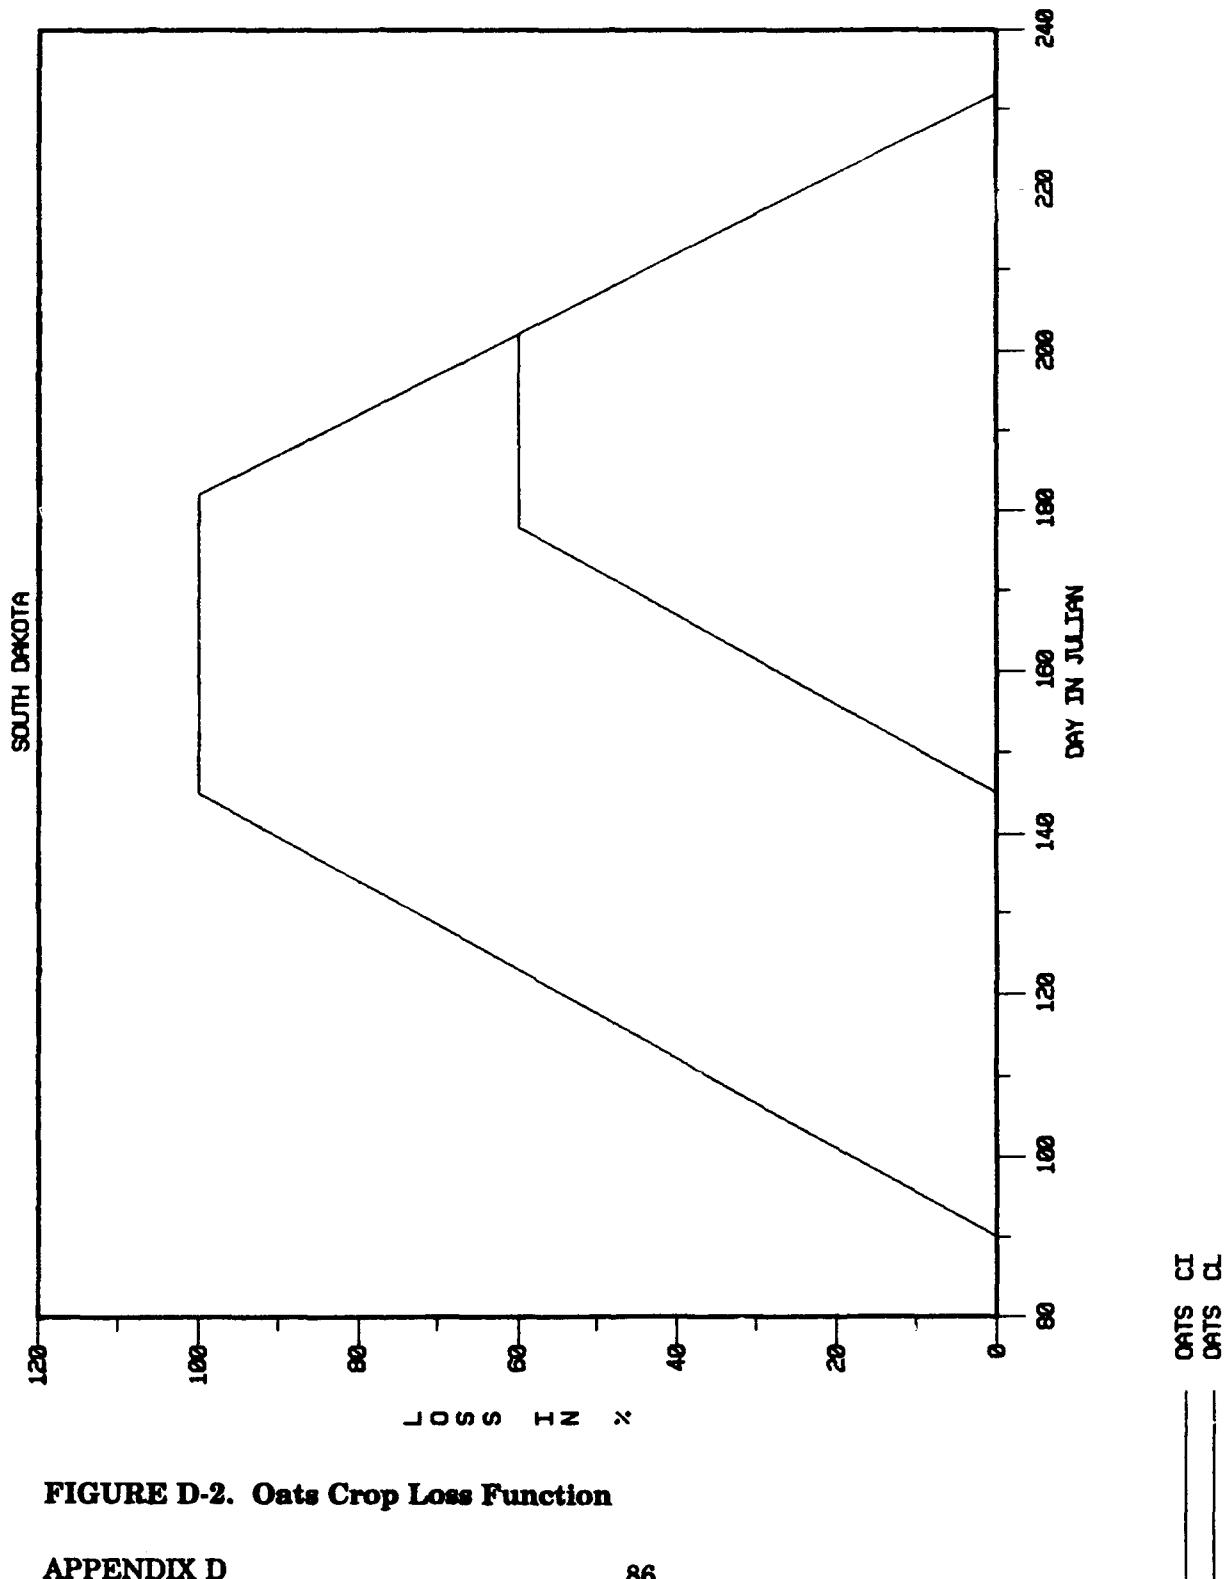


FIGURE D-2. Oats Crop Loss Function

30JUL92 08:41:40

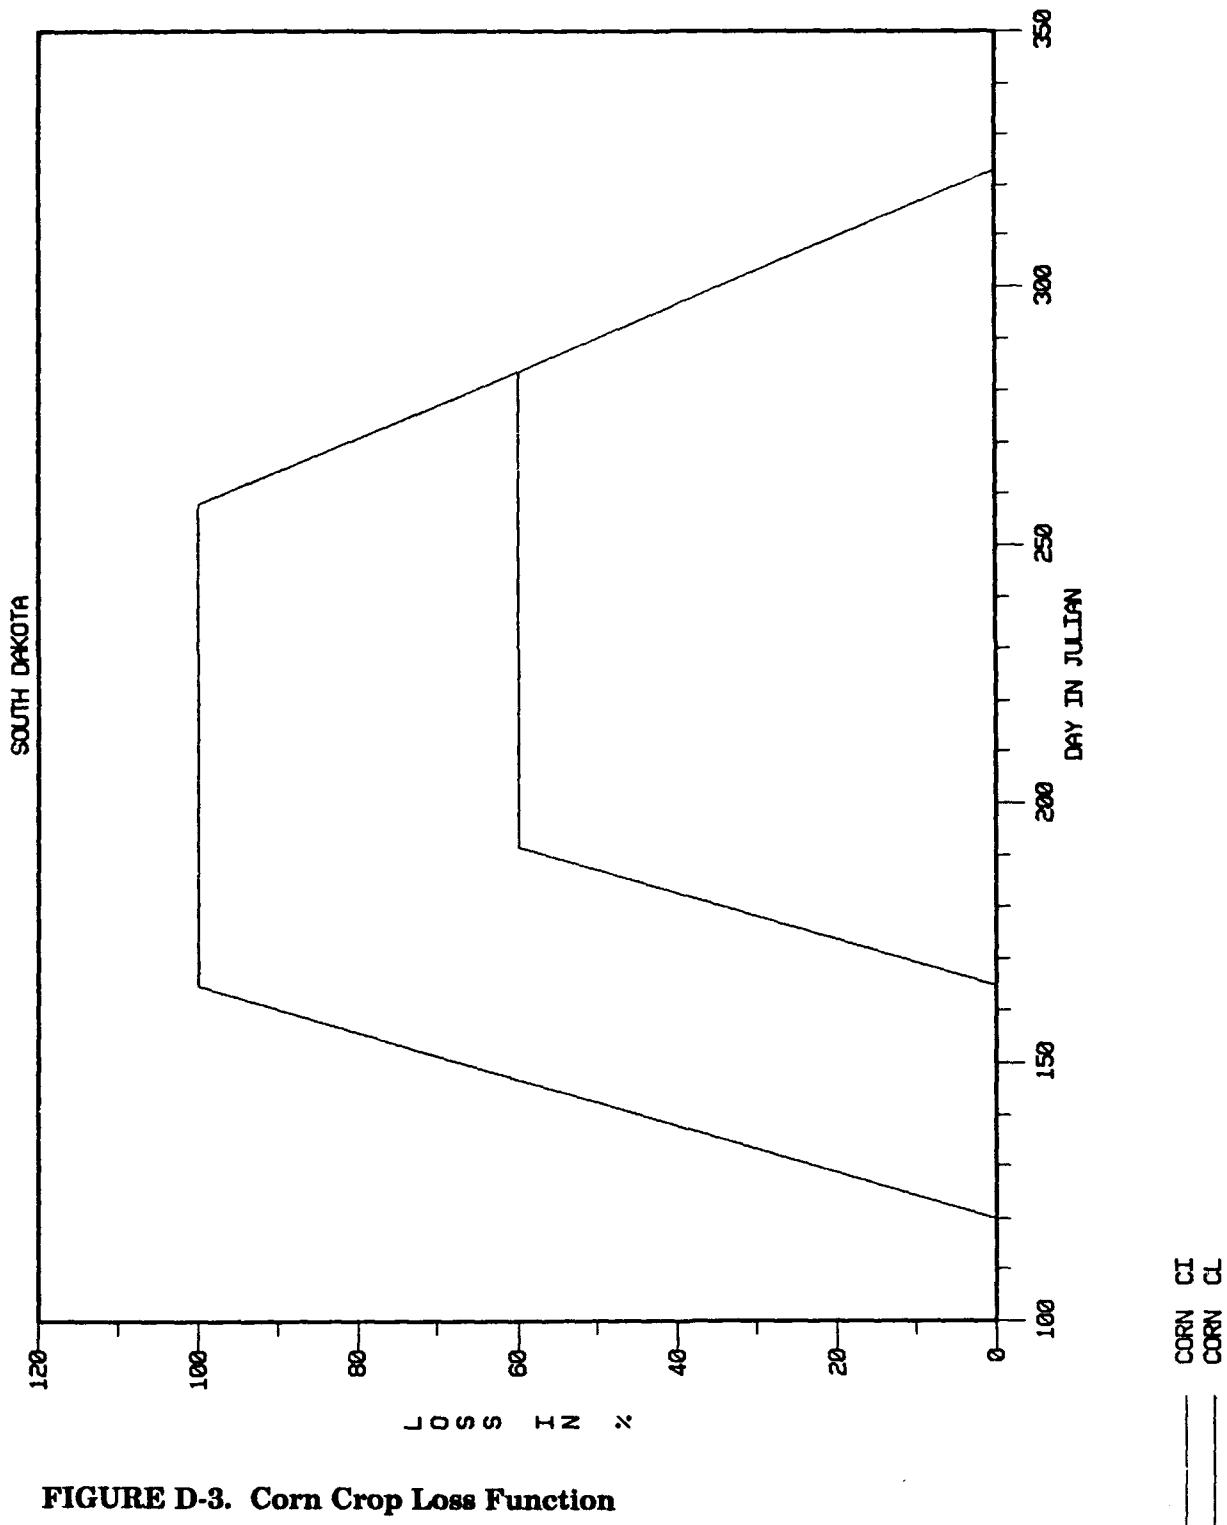


FIGURE D-3. Corn Crop Loss Function

30JUL92 09:04:21


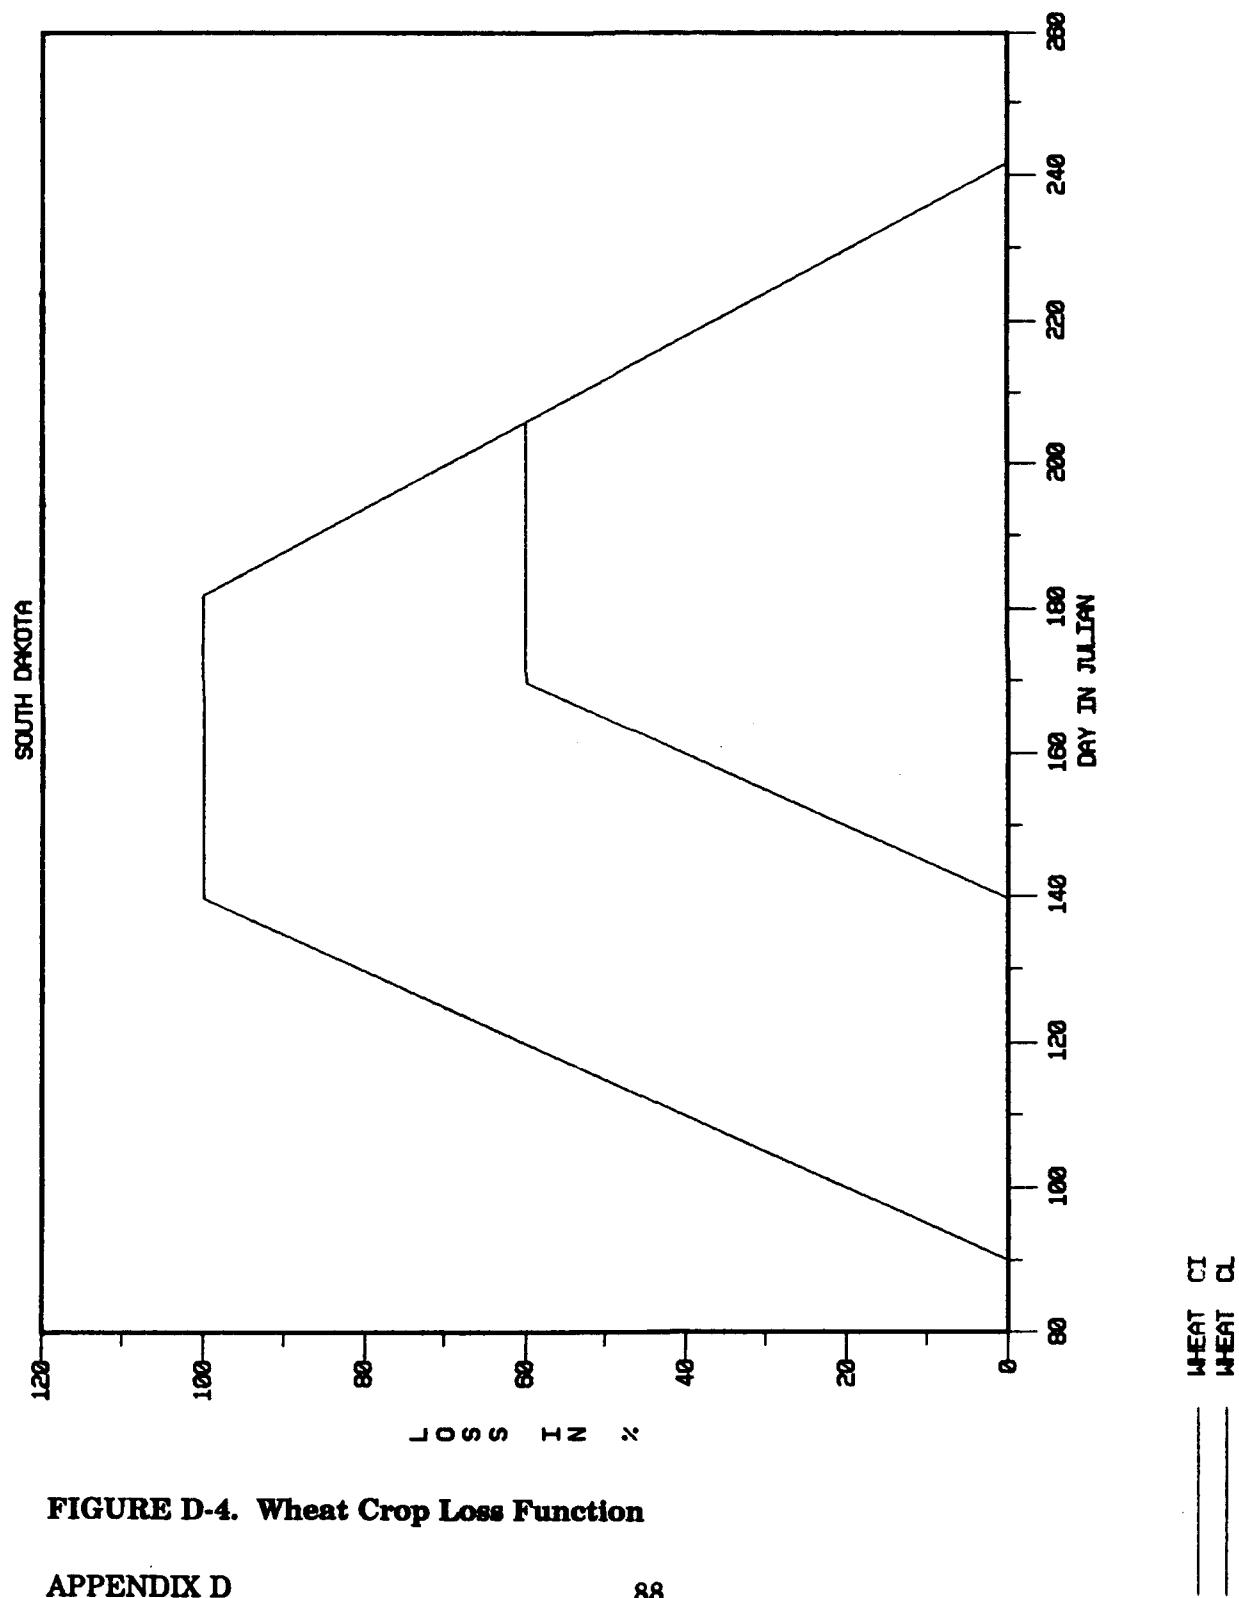


FIGURE D-4. Wheat Crop Loss Function

D-3. HEC-PBA Input - Flood Hydrographs

27JUL92 11:00:16


MISSOURI

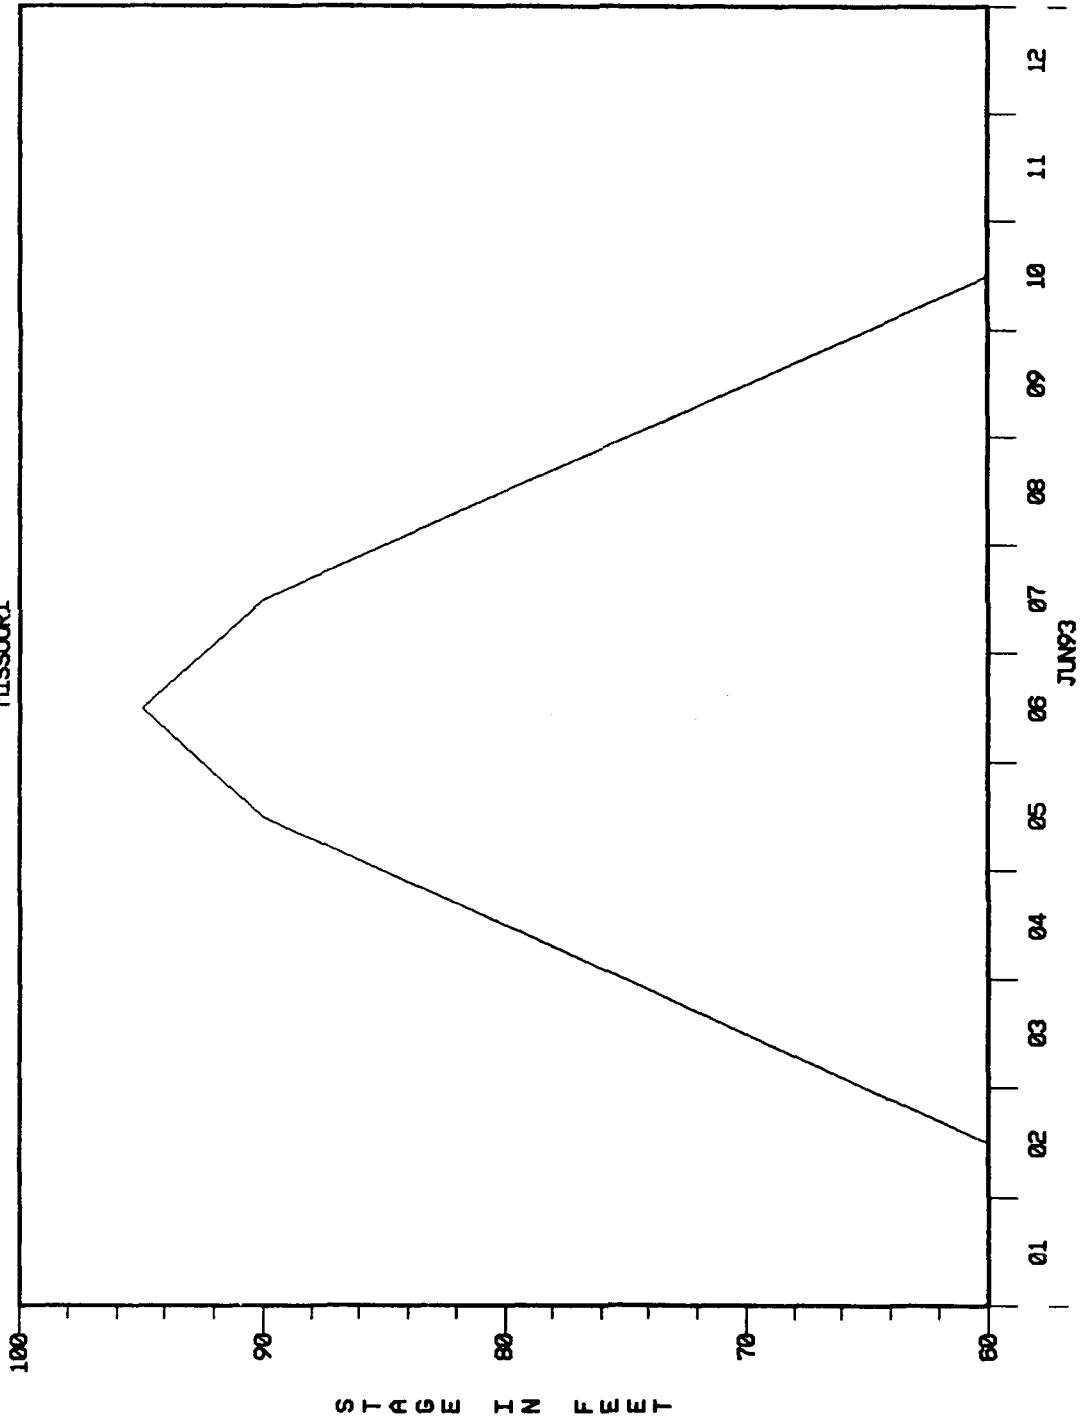

GAGE 3 REGULATED STAGE

FIGURE D-5. Regulated Stage Hydrograph at Gage 3

MISSOURI

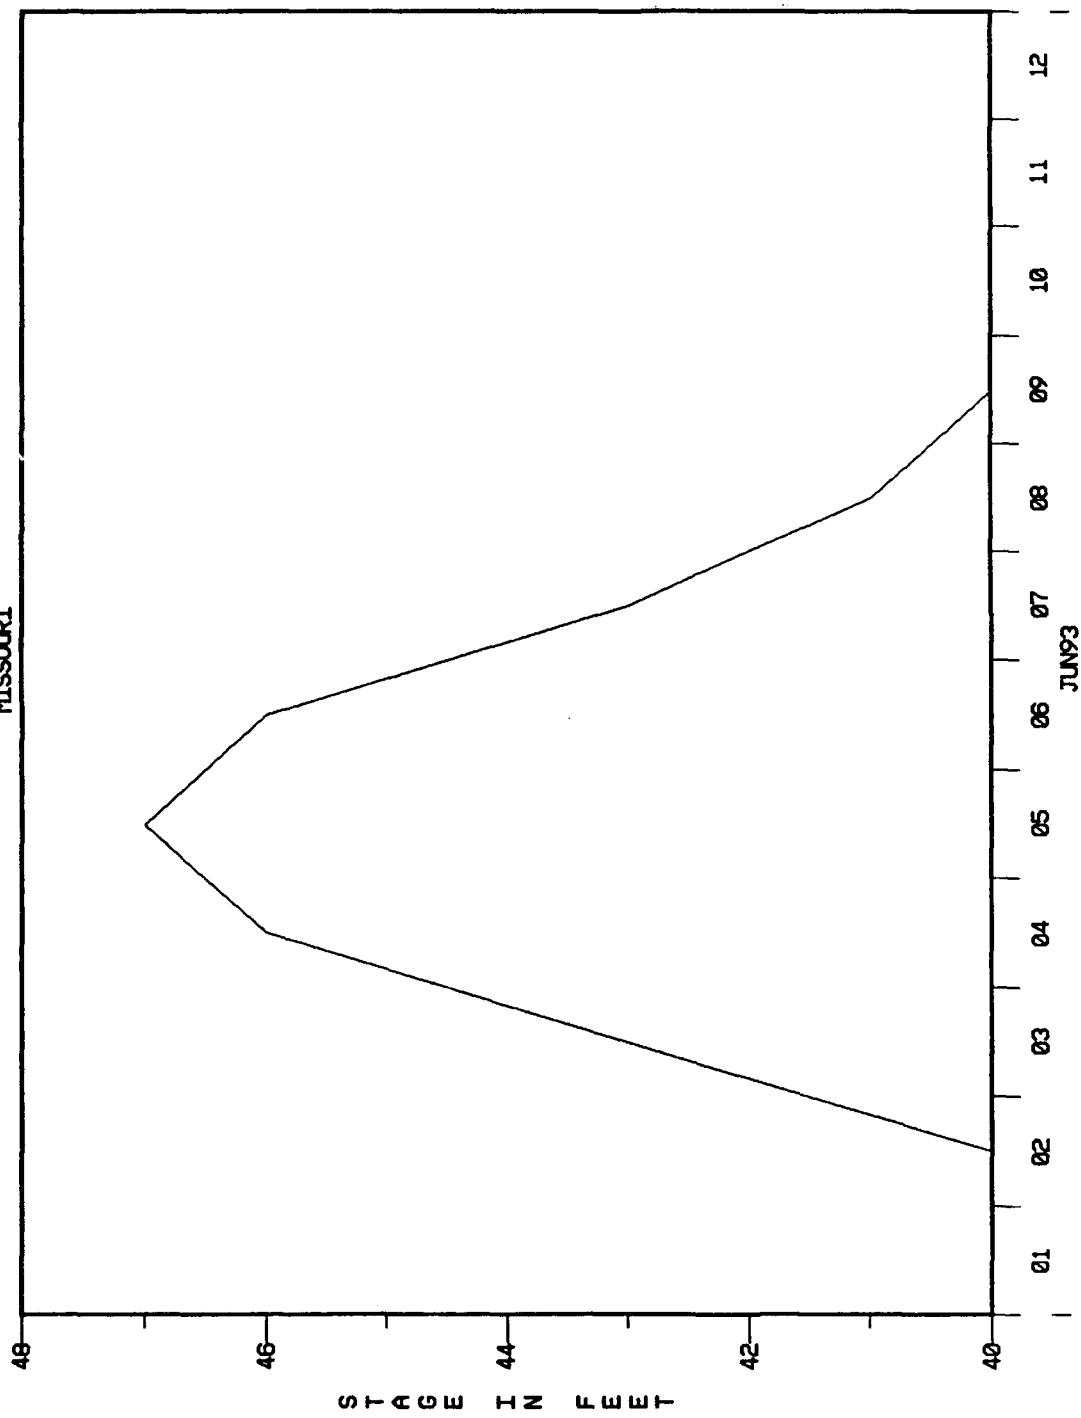

GAGE 4 REGULATED STAGE

FIGURE D-6. Regulated Stage Hydrograph at Gage 4

27JUL92 10:53:34

MISSOURI

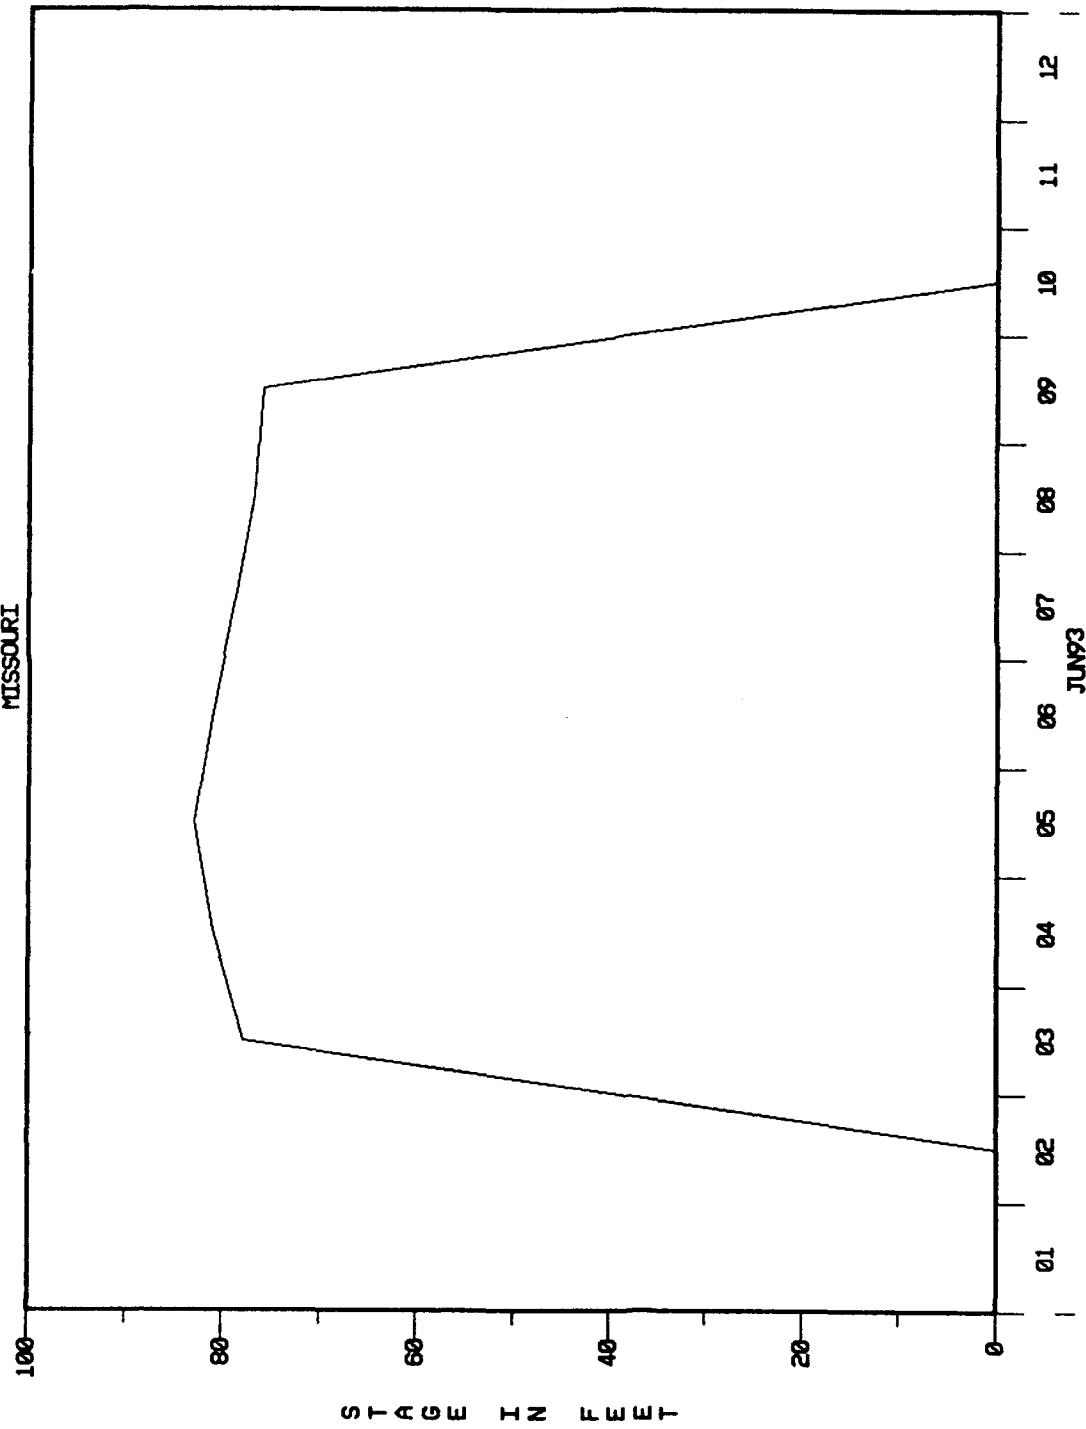


FIGURE D-7. Regulated Stage Hydrograph at Gage 11

D-4. HEC-PBA Output - Preprocessor and Analysis Programs

Preprocessor Program Output Data

```
*****  
• FLOOD DAMAGE PROJECT BENEFIT ACCOMPLISHMENT •  
• PRE-PROCESSOR PROGRAM •  
• SEPTEMBER 1991 •  
• VERSION 1.00 •  
• RUN DATE 24 JUL 92 TIME 12:46:04 •  
*****
```

```
*****  
• U.S. ARMY CORPS OF ENGINEERS •  
• THE HYDROLOGIC ENGINEERING CENTER •  
• 809 SECOND STREET, SUITE D •  
• DAVIS, CALIFORNIA 95816 •  
• (916) 756-1104 FAX (916) 756-8250 •  
*****
```

XXXXX XXXXX XXXXXX XXXXX XXXXX X
X X X X X X X X X X X X X X X X X X
X X X X X X X X X X X X X X X X X X
XXXXX XXXXXX XXXX XXXXXX XXXXXX XXXXXX
X X X X X X X X X X X X X X X X X X
X X X X X X X X X X X X X X X X X X
X X X X X X X X X X X X X X X X X X

MISSOURI RIVER
OAME DAM TO BIG BEND DAM IN SOUTH DAKOTA

BD RECORD - COE DISTRICT
BD OMAHA OMAHA DISTRICT

BS RECORD - STATE
BS SD SOUTH DAKOTA

BC RECORD - COUNTY
BC HUGH HUGHES COUNTY
BC STAN STANLEY COUNTY
BC LYNN LYMAN COUNTY
BC HYDE HYDE COUNTY
BC BUFF BUFFALO COUNTY

BB RECORD - SUB-BASIN
BB SUBA OPEN RIVER
BB SUBB LAKE SHARPE
BB CROW CRW RESERVATION
BB LBRU LBR RESERVATION

BW RECORD - WATERSHED
BW MISS MISSOURI RIVER

BG RECORD - CONGRESSIONAL DISTRICT
BG CONG1 REP TIM JOHNSON

BX RECORD - COMMUNITY
BX PIER PIERRE
BX FTPR FORT PIERRE
BX LOWB LOWER BRULE
BX FTTM FORT THOMPSON
BX CHAM CHAMBERLAIN

GA RECORD - GAUGE NAME
GA GAGE 3

ZH RECORD - HYDROGRAPH DATA - DSS PATHNAME
ZH MISSOURI GAGE 3 1DAY REGULATED

GA RECORD - GAUGE NAME
GA GAGE 4

ZH RECORD - HYDROGRAPH DATA - DSS PATHNAME
ZH MISSOURI GAGE 4 1DAY REGULATED

GA RECORD - GAUGE NAME
GA GAGE 11

ZH RECORD - HYDROGRAPH DATA - DSS PATHNAME
ZH MISSOURI GAGE 11 1DAY REGULATED

CR RECORD - CROP DEFINITION

CR WHEAT 28 BUSHEL 3.15 16.00 6 SPRING WHEAT

CS RECORD - SEASONAL CROP VARIABLES

CS WHEAT 80 115 140 7

FULYLD = 115.00 LAST DATE TO PLANT WITHOUT LOSS OF YIELD

FSTPLT = 80.00 FIRST DATE TO PLANT

LSTPLT = 140.00 LAST DATE TO PLANT

DRYOUT = 7.00 DAYS

ZC Record - Crop Data - DSS Pathname
ZC A=SOUTH DAKOTA B=WHEAT C=DAY-LOSS E=1992

CROPID = WHEAT CROP NAME
CYA = 28.00 YIELD PER UNIT AREA
CUP = 3.15 UNIT PRICE
HRVCST = 16.00 HARVEST COST \$ PER ACRE
ADLOSS = 0.080 OTHER AGRICULTURAL LOSS FACTOR
FULYLD = 115. LAST DATE TO PLANT WITHOUT LOSS OF YIELD
LSTPLT = 140. LAST DATE TO PLANT
DRYOUT = 7.0 DAYS
CAPITIT = SPRING WHEAT

CROP LOSS TABLE (PERCENT LOSS VALUES)

DATE	DAY OF YEAR	POTENTIAL LOSS (%)	REDUCED YIELD (%)	PERCENT LOSS BY FLOOD DURATION (DAYS)			
				0.0	1.0	3.0	7.0
31 MARCH	90.	0.0	0.0	0.0	0.0	0.0	0.0
20 MAY	140.	100.0	0.0	0.0	0.0	25.0	50.0
19 JUNE	170.	100.0	60.0	0.0	75.0	100.0	100.0
1 JULY	182.	100.0	60.0	0.0	100.0	100.0	100.0
25 JULY	206.	60.0	60.0	0.0	100.0	100.0	100.0
30 AUG	242.	0.0	0.0	0.0	100.0	100.0	100.0

CROP LOSS TABLE (DOLLAR LOSS VALUES)

DATE	DAY OF YEAR	POTENTIAL LOSS (\$)	REDUCED YIELD (\$)	DOLLAR LOSS BY FLOOD DURATION (DAYS) PER ACRE			
				0.0	1.0	3.0	7.0
31 MARCH	90.	0.00	0.00	0.00	0.00	0.00	0.00
20 MAY	140.	72.20	0.00	0.00	0.00	18.05	36.10
19 JUNE	170.	72.20	43.32	0.00	54.15	72.20	72.20
1 JULY	182.	72.20	43.32	0.00	72.20	72.20	72.20
25 JULY	206.	43.32	43.32	0.00	43.32	43.32	43.32
30 AUG	242.	0.00	0.00	0.00	0.00	0.00	0.00

CR RECORD - CROP DEFINITION
 CR CORN 91 BUSHEL 2.20 28.00 5 CORN

CS RECORD - SEASONAL CROP VARIABLES
 CS CORN 120 145 185 10

FULYLD = 145.00 LAST DATE TO PLANT WITHOUT LOSS OF YIELD
 FSTPLT = 120.00 FIRST DATE TO PLANT
 LSTPLT = 185.00 LAST DATE TO PLANT
 DRYOUT = 10.00 DAYS

ZC Record - Crop Data - DSS Pathname
 ZC A=SOUTH DAKOTA B=CORN C=DAY-LOSS E=1992

CROPID = CORN CROP NAME
 CYA = 91.00 YIELD PER UNIT AREA
 CUP = 2.20 UNIT PRICE
 HRVCST = 28.00 HARVEST COST \$ PER ACRE
 ADLOSS = 0.050 OTHER AGRICULTURAL LOSS FACTOR
 FULYLD = 145. LAST DATE TO PLANT WITHOUT LOSS OF YIELD
 LSTPLT = 185. LAST DATE TO PLANT
 DRYOUT = 10.0 DAYS
 CRPTIT = CORN

CROP LOSS TABLE (PERCENT LOSS VALUES)

DATE	DAY OF YEAR	POTENTIAL LOSS (%)	REDUCED YIELD (%)	PERCENT LOSS BY FLOOD DURATION (DAYS)			
				0.0	1.0	3.0	7.0
30 APRIL	120.	0.0	0.0	0.0	0.0	0.0	0.0
14 JUNE	165.	100.0	0.0	0.0	0.0	50.0	75.0
11 JULY	192.	100.0	80.0	0.0	0.0	100.0	100.0
15 SEPT	258.	100.0	60.0	0.0	0.0	100.0	100.0
11 OCT	284.	60.0	60.0	0.0	0.0	100.0	100.0
19 NOV	323.	0.0	0.0	0.0	0.0	100.0	100.0

CROP LOSS TABLE (DOLLAR LOSS VALUES)

DATE	DAY OF YEAR	POTENTIAL LOSS (\$)	REDUCED YIELD (\$)	DOLLAR LOSS BY FLOOD DURATION (DAYS) PER ACRE			
				0.0	1.0	3.0	7.0
30 APRIL	120.	0.00	0.00	0.00	0.00	0.00	0.00
14 JUNE	165.	172.20	0.00	0.00	0.00	86.10	128.15
11 JULY	192.	172.20	103.32	0.00	0.00	172.20	172.20
15 SEPT	258.	172.20	103.32	0.00	0.00	172.20	172.20
11 OCT	284.	103.32	103.32	0.00	0.00	103.32	103.32
19 NOV	323.	0.00	0.00	0.00	0.00	0.00	0.00

CR RECORD - CROP DEFINITION
 CR OATS 50 BUSHEL 1.20 23.00 5 OATS

CS RECORD - SEASONAL CROP VARIABLES
 CS OATS 90 127 145 7

FULYLD = 127.00 LAST DATE TO PLANT WITHOUT LOSS OF YIELD
 FSTPLT = 90.00 FIRST DATE TO PLANT
 LSTPLT = 145.00 LAST DATE TO PLANT
 DRYOUT = 7.00 DAYS

CROPID = OATS CROP NAME
 CYA = 50.00 YIELD PER UNIT AREA
 CUP = 1.20 UNIT PRICE
 HRVCST = 23.00 HARVEST COST \$ PER ACRE
 ADLOSS = 0.050 OTHER AGRICULTURAL LOSS FACTOR
 FULYLD = 127. LAST DATE TO PLANT WITHOUT LOSS OF YIELD
 LSTPLT = 145. LAST DATE TO PLANT
 DRYOUT = 7.0 DAYS
 CRPTIT = OATS

CROP LOSS TABLE (PERCENT LOSS VALUES)

DATE	DAY OF YEAR	POTENTIAL LOSS (%)	REDUCED YIELD (%)	PERCENT LOSS BY FLOOD DURATION (DAYS)			
				0.0	1.0	3.0	7.0
31 MARCH	90.	0.0	0.0	0.0	0.0	0.0	0.0
25 MAY	145.	100.0	0.0	0.0	0.0	25.0	50.0
27 JUNE	178.	100.0	80.0	0.0	75.0	100.0	100.0
1 JULY	182.	100.0	80.0	0.0	100.0	100.0	100.0
21 JULY	202.	80.0	80.0	0.0	100.0	100.0	100.0
20 AUG	232.	0.0	0.0	0.0	100.0	100.0	100.0

CROP LOSS TABLE (DOLLAR LOSS VALUES)

DATE	DAY OF YEAR	POTENTIAL LOSS (\$)	REDUCED YIELD (\$)	DOLLAR LOSS BY FLOOD DURATION (DAYS) PER ACRE			
				0.0	1.0	3.0	7.0
31 MARCH	90.	0.00	0.00	0.00	0.00	0.00	0.00
25 MAY	145.	37.00	0.00	0.00	0.00	9.25	18.50
27 JUNE	178.	37.00	22.20	0.00	27.75	37.00	37.00
1 JULY	182.	37.00	22.20	0.00	37.00	37.00	37.00
21 JULY	202.	22.20	22.20	0.00	22.20	22.20	22.20
20 AUG	232.	0.00	0.00	0.00	0.00	0.00	0.00

CR RECORD - CROP DEFINITION
 CR MILO 41 BUSHEL 2.04 18.00 5 SORGHUM

CS RECORD - SEASONAL CROP VARIABLES
 CS MILO 125 161 180 7

FULYLD = 181.00 LAST DATE TO PLANT WITHOUT LOSS OF YIELD
 FSTPLT = 128.00 FIRST DATE TO PLANT
 LSTPLT = 180.00 LAST DATE TO PLANT
 DRYOUT = 7.00 DAYS

ZC Record - Crop Data - DSS Pathname
 ZC A=SOUTH DAKOTA B=SORGHUM C=DAY-LOSS E=1982

CROPID = MILO CROP NAME
 CYA = 41.00 YIELD PER UNIT AREA
 CUP = 2.04 UNIT PRICE
 HRVCST = 18.00 HARVEST COST \$ PER ACRE
 ADLOSS = 0.050 OTHER AGRICULTURAL LOSS FACTOR
 FULYLD = 181. LAST DATE TO PLANT WITHOUT LOSS OF YIELD
 LSTPLT = 180. LAST DATE TO PLANT
 DRYOUT = 7.0 DAYS
 CRPTIT = SORGHUM

CROP LOSS TABLE (PERCENT LOSS VALUES)

DATE	DAY OF YEAR	POTENTIAL LOSS (%)	REDUCED YIELD (%)	PERCENT LOSS BY FLOOD DURATION (DAYS)			
				0.0	1.0	3.0	7.0
5 MAY	125.	0.0	0.0	0.0	0.0	0.0	0.0
29 JUNE	180.	100.0	0.0	0.0	0.0	25.0	50.0
1 AUG	213.	100.0	60.0	0.0	75.0	100.0	100.0
5 SEPT	248.	100.0	60.0	0.0	100.0	100.0	100.0
5 OCT	278.	80.0	60.0	0.0	100.0	100.0	100.0
19 NOV	323.	0.0	0.0	0.0	100.0	100.0	100.0

CROP LOSS TABLE (DOLLAR LOSS VALUES)

DATE	DAY OF YEAR	POTENTIAL LOSS (\$)	REDUCED YIELD (\$)	DOLLAR LOSS BY FLOOD DURATION (DAYS) PER ACRE			
				0.0	1.0	3.0	7.0
5 MAY	125.	0.00	0.00	0.00	0.00	0.00	0.00
29 JUNE	180.	65.64	0.00	0.00	0.00	16.41	32.82
1 AUG	213.	65.64	39.38	0.00	49.23	65.64	65.64
5 SEPT	248.	65.64	39.38	0.00	65.64	65.64	65.64
5 OCT	278.	39.38	39.38	0.00	39.38	39.38	39.38
19 NOV	323.	0.00	0.00	0.00	0.00	0.00	0.00

WATER RESOURCE UNIT
 DR RCH 1 GAGE 3 O HUGHES COUNTY, US OF PIERRE
 WRUID = RCH 1 WATER RESOURCE UNIT ID
 GAUGE = GAGE 3
 DELTEL = 0.00 GAUGE ELEVATION OFFSET
 WRUTIT = HUGHES COUNTY, US OF PIERRE
 WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
 DS OMAHA SD HUGH MISS SUBA CONG1
 DIST = OMAHA COE DISTRICT
 STATE = SD
 COUNTY = HUGH
 WATSHD = MISS WATERSHED
 SUBASH = SUBA SUBBASIN
 CONG = CONG1 CONGRESSIONAL DISTRICT
 DS RECORD - RESERVOIR PROJECT
 DS DAHE DAHE RESERVOIR
 RESID = DAHE RESERVOIR PROJECT ID
 RESTIT = DAHE RESERVOIR RESERVOIR PROJECT TITLE
 FS RECORD - FLOOD STAGE ELEVATION
 FS 40
 ZR RECORD - REACH DATA - DSS PATHNAME
 ZR A=MISSOURI B=RCH 1 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
 CROPID = WHEAT
 CROPAR = 18.00 % OF REACH PLANTED
 CROPID = CORN
 CROPAR = 36.00 % OF REACH PLANTED
 CROPID = OATS
 CROPAR = 14.00 % OF REACH PLANTED
 CROPID = MILO
 CROPAR = 10.00 % OF REACH PLANTED

WRUID	GAUGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASH	CONG	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR
RCH 1	GAGE 3	OMAHA	SD	HUGH		MISS	SUBA	CONG1					DAHE

ELEVATION	CUMULATIVE CROP AREA (ACRES)			
	WHEAT	CORN	OATS	MILO
40.00	0.00	0.00	0.00	0.00
50.00	0.00	0.00	0.00	0.00
60.00	0.00	0.00	0.00	0.00
70.00	0.00	0.00	0.00	0.00
80.00	0.00	0.00	0.00	0.00
90.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	0.00	0.00
110.00	0.00	0.00	0.00	0.00
120.00	0.00	0.00	0.00	0.00
130.00	0.00	0.00	0.00	0.00
140.00	0.00	0.00	0.00	0.00
150.00	0.00	0.00	0.00	0.00
160.00	0.00	0.00	0.00	0.00
170.00	0.00	0.00	0.00	0.00

WATER RESOURCE UNIT
DR RCH 2 GAGE 4 O STANLEY COUNTY, US OF FORT PIERRE

WRUID = RCH 2 WATER RESOURCE UNIT ID
GAUGE = GAGE 4
DETEL = 0.00 GAUGE ELEVATION OFFSET
WRUTIT = STANLEY COUNTY, US OF FORT PIERRE

WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
DB OMAMA SD STAN MISS SUBA CONG1

DIRT = OMAHA COE DISTRICT
STATE = SD
COUNTY = STAN
WATSHD = MISS WATERSHED
SUBASH = SUBA SUBBASIN
CONG = CONG1 CONGRESSIONAL DISTRICT

DS RECORD - RESERVOIR PROJECT
DS DAHE DAHE RESERVOIR
RESID = DAHE RESERVOIR PROJECT ID
RESTIT = DAHE RESERVOIR RESERVOIR PROJECT TITLE

FS RECORD - FLOOD STAGE ELEVATION
FS 40

ZR RECORD - REACH DATA - DSS PATHNAME
ZR A=MISSOURI B=RCH 2 C=ELEVATION-CURVES E=1992 F=AG-EXISTING

CROPID = WHEAT
CROPAR = 20.00 % OF REACH PLANTED

CROPID = OATS
CROPAR = 21.00 % OF REACH PLANTED

CROPID = MILO
CROPAR = 50.00 % OF REACH PLANTED

WRUID	GAUGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASH	CONG	CNTY	FLDIST	LEVEE	CHANNEL	RESVR	DAHE
RCH 2	GAGE 4	OMAHA	SD	STAN		MISS	SUBA	CONG1						

ELEVATION	CUMULATIVE CROP AREA (ACRES)		
	AREA	WHEAT	OATS
40.00	0.00	0.00	0.00
50.00	0.20	0.00	0.00
60.00	0.00	0.00	0.00
70.00	0.00	0.00	0.00
80.00	7.00	2.03	1.47
90.00	29.00	8.41	6.09
100.00	58.00	16.82	12.18
110.00	93.00	28.97	19.53
120.00	148.00	42.92	31.08
130.00	216.00	62.64	45.38
140.00	218.00	63.22	45.78
150.00	218.00	63.22	45.78
160.00	218.00	63.22	45.78
170.00	218.00	63.22	45.78

WATER RESOURCE UNIT
 DR RCH 3 GAGE 3 O CITY OF PIERRE
 WRUID = RCH 3 WATER RESOURCE UNIT ID
 GAUGE = GAGE 3
 DELTEL = 0.00 GAUGE ELEVATION OFFSET
 WRUTIT = CITY OF PIERRE
 WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
 DS OMAHA SD HUGH MISS SUBA CONG1
 DIST = OMAHA COE DISTRICT
 STATE = SD
 COUNTY = HUGH
 WATSHD = MISS WATERSHED
 SUBASN = SUBA SUBBASIN
 CONG = CONG1 CONGRESSIONAL DISTRICT
 DS RECORD - RESERVOIR PROJECT
 DS DAHE DAHE RESERVOIR
 RESID = DAHE RESERVOIR PROJECT ID
 RESTIT = DAHE RESERVOIR RESERVOIR PROJECT TITLE
 FS RECORD - FLOOD STAGE ELEVATION
 FS 68
 ZR RECORD - REACH DATA - DSS PATHNAME
 ZR A=MISSOURI B=RCH 3 C=ELEVATION-CURVES E=1992 F=URBAN-EXISTING
 URBAN = RES URBAN DAMAGE CATEGORY ID
 RCONST = 180.00 RECONSTRUCTION PERIOD
 URBTIT = RESIDENTIAL
 URBAN = COM URBAN DAMAGE CATEGORY ID
 RCONST = 180.00 RECONSTRUCTION PERIOD
 URBTIT = COMMERCIAL
 URBAN = IND URBAN DAMAGE CATEGORY ID
 RCONST = 180.00 RECONSTRUCTION PERIOD
 URBTIT = INDUSTRIAL
 URBAN = PUB URBAN DAMAGE CATEGORY ID
 RCONST = 180.00 RECONSTRUCTION PERIOD
 URBTIT = PUBLIC WORKS
 URBAN = OTHER URBAN DAMAGE CATEGORY ID
 RCONST = 30.00 RECONSTRUCTION PERIOD
 URBTIT = OPEN SPACE

WRUID RCH 3	Gauge GAGE 3	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	COUNTY	FLDIST	LEVEE	CHANNEL	RESVR DAHE
----------------	-----------------	--------------	-------------	----------------	------	----------------	----------------	---------------	--------	--------	-------	---------	---------------

ELEVATION	URBAN PROPERTY DAMAGE (\$1000)				IND	STRUCTURES	PUB	OTHER	STRUCTURES
	RES	STRUCTURES	COM	STRUCTURES					
68.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	32.80	0.00
68.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	38.71	0.10
70.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	50.87	1.40
72.00	0.00	0.00	0.00	0.00	0.00	0.00	80.06	87.88	5.20
74.00	0.00	0.00	0.00	0.00	0.00	0.00	268.54	154.34	8.40
76.00	115.54	10.50	0.00	0.00	6.30	0.25	577.50	230.06	12.00
78.00	871.12	38.00	0.00	0.00	18.24	0.50	1094.38	305.90	15.50
80.00	1494.66	73.50	0.00	0.00	75.40	2.00	2150.93	378.92	17.60
82.00	2807.87	98.00	0.00	0.00	504.09	8.00	3574.64	442.28	20.30
84.00	3713.40	124.50	89.07	1.30	1815.27	14.50	5414.49	498.41	22.20
86.00	5037.99	157.50	440.79	4.10	3818.49	20.25	7279.02	550.75	24.30
88.00	6350.32	184.50	835.89	5.90	6457.52	27.00	9521.86	602.52	26.20
90.00	7733.48	218.00	1289.10	7.50	10333.44	34.50	11691.13	649.54	27.20
92.00	9109.71	250.50	1886.78	8.10	14834.30	41.50	14180.48	680.96	27.90
94.00	10795.49	312.00	2611.93	10.70	19187.43	50.25	16456.01	705.93	28.40
96.00	12655.27	379.50	3424.39	12.40	22663.87	58.50	18682.77	731.51	29.40
98.00	14808.92	447.00	4285.82	14.90	25923.57	62.25	20516.59	757.72	30.20
100.00	17237.76	519.00	5188.76	16.10	28393.24	68.00	21355.35	784.33	30.80

WATER RESOURCE UNIT
 DR RCH 4 GAGE 4 O CITY OF FORT PIERRE
 WRUID = RCH 4 WATER RESOURCE UNIT ID
 GAUGE = GAGE 4
 DELTEL = 0.00 GAUGE ELEVATION OFFSET
 WRUTIT = CITY OF FORT PIERRE
 WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
 DB OMAHA SD HUGH MISS SUBA CONG1
 DIST = OMAHA COE DISTRICT
 STATE = SD
 COUNTY = HUGH
 WATSHD = MISS WATERSHED
 SUBASH = SUBA SUBBASIN
 CONG = CONG1 CONGRESSIONAL DISTRICT
 DS RECORD - RESERVOIR PROJECT
 DS DAHE DAHE RESERVOIR
 RESID = DAHE RESERVOIR PROJECT ID
 RESTIT = DAHE RESERVOIR RESERVOIR PROJECT TITLE
 FS RECORD - FLOOD STAGE ELEVATION
 FS 40
 ZR RECORD - REACH DATA - DSS PATHNAME
 ZR A=MISSOURI B=RCH 4 C=ELEVATION-CURVES E=1982 F=URBAN-EXISTING
 URBAN = RES URBAN DAMAGE CATEGORY ID
 RCONST = 180.00 RECONSTRUCTION PERIOD
 URBTIT = RESIDENTIAL
 URBAN = COM URBAN DAMAGE CATEGORY ID
 RCONST = 180.00 RECONSTRUCTION PERIOD
 URBTIT = COMMERCIAL
 URBAN = IND URBAN DAMAGE CATEGORY ID
 RCONST = 180.00 RECONSTRUCTION PERIOD
 URBTIT = INDUSTRIAL
 URBAN = PUB URBAN DAMAGE CATEGORY ID
 RCONST = 180.00 RECONSTRUCTION PERIOD
 URBTIT = PUBLIC WORKS
 URBAN = OTHER URBAN DAMAGE CATEGORY ID
 RCONST = 30.00 RECONSTRUCTION PERIOD
 URBTIT = OPEN SPACE

WRUID	GAUGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASH	CONG	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR	DAHE
RCH 4	GAGE 4	OMAHA	SD	HUGH		MISS	SUBA	CONG1						

ELEVATION	URBAN PROPERTY DAMAGE (\$1000)					PUB	OTHER
	RES	STRUCTURES	COM	IND	PUB		
40.00	0.00	0.00	0.00	0.00	0.00	0.00	
41.00	0.00	0.00	0.00	0.00	0.00	0.03	
42.00	0.00	0.00	0.00	0.00	0.00	0.16	
43.00	0.00	0.00	0.00	0.00	0.00	0.64	
44.00	0.00	0.00	0.00	1778.78	0.00	1.31	
45.00	364.77	48.50	0.00	3482.65	0.00	2.12	
46.00	1986.39	129.00	0.00	4007.05	0.00	3.07	
47.00	3387.90	163.50	0.00	4910.66	0.00	4.15	
48.00	4638.84	190.50	0.00	6020.98	0.00	5.37	
49.00	5771.69	214.50	0.00	7156.04	0.00	6.75	
50.00	6741.48	220.50	0.00	7974.20	0.00	8.20	
51.00	7518.36	223.50	0.00	8261.72	0.00	9.96	
52.00	8246.89	229.50	0.00	8435.23	0.00	11.77	
53.00	9000.75	235.50	0.00	8699.96	0.00	13.73	
54.00	9898.89	241.50	0.00	8961.81	0.00	15.79	
55.00	10812.97	247.50	0.00	9129.74	0.00	17.98	
56.00	11411.86	252.00	0.00	9295.99	0.00	20.27	
57.00	11867.18	255.00	0.00	9456.24	0.00	22.67	

WATER RESOURCE UNIT
DR RIVER GAGE 4 O STANLEY COUNTY DS OF FORT PIERRE

WRUID = RCH 8 WATER RESOURCE UNIT ID
GAUGE = GAGE 4
DELTTEL = 0.00 GAUGE ELEVATION OFFSET
WRUTIT = STANLEY COUNTY DS OF FORT PIERRE

WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
DR OMAMA SD STAN MISS SUBA CONG1

DIST = OMAHA COE DISTRICT
STATE = SD
COUNTY = STAN
WATSHD = MISS WATERSHED
SUBASH = SUBA SUBBASIN
CONG = CONG1 CONGRESSIONAL DISTRICT

DS RECORD - RESERVOIR PROJECT
DS OAHE OAHE RESERVOIR
REGID = OAHE RESERVOIR PROJECT ID
RESTIT = OAHE RESERVOIR RESERVOIR PROJECT TITLE

FS RECORD - FLOOD STAGE ELEVATION
FS 40

ZR RECORD - REACH DATA - DSS PATHNAME
ZR A=MISSOURI B=RCH 8 C=ELEVATION-CURVES E=1992 F=AG-EXISTING

CROPID = WHEAT
CROPAR = 29.00 % OF REACH PLANTED
CROPID = OATS
CROPAR = 21.00 % OF REACH PLANTED
CROPID = MILO
CROPAR = 50.00 % OF REACH PLANTED

WRUID	GAUGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASH	CONG	CNTY	FLDIST	LEVEE	CHANNEL	RESVR	OAHE
-------	-------	-----	-------	--------	------	--------	--------	------	------	--------	-------	---------	-------	------

ELEVATION	AREA	CUMULATIVE CROP AREA (ACRES)		
		WHEAT	OATS	MILO
40.00	0.00	0.00	0.00	0.00
50.00	578.00	167.62	121.38	289.00
60.00	580.00	168.20	121.80	290.00
70.00	580.00	168.20	121.80	290.00
80.00	580.00	168.20	121.80	290.00
90.00	580.00	168.20	121.80	290.00
100.00	580.00	168.20	121.80	290.00
110.00	580.00	168.20	121.80	290.00
120.00	580.00	168.20	121.80	290.00
130.00	580.00	168.20	121.80	290.00
140.00	580.00	168.20	121.80	290.00
150.00	580.00	168.20	121.80	290.00
160.00	580.00	168.20	121.80	290.00
170.00	580.00	168.20	121.80	290.00

WATER RESOURCE UNIT
 DA RCH 7 GAGE 11 O HUGHES COUNTY, DS OF PIERRE
 WRUID = RCH 7 WATER RESOURCE UNIT ID
 GAUGE = GAGE 11
 DELTEL = 0.00 GAUGE ELEVATION OFFSET
 WRUTIT = HUGHES COUNTY, DS OF PIERRE
 WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
 DB OMAHA SD HIGH MISS SUBS CONG1
 DIST = OMAHA COE DISTRICT
 STATE = SD
 COUNTY = HUGH
 WATBHD = MISS WATERSHED
 SUBASH = SUBS BUBBAVIN
 CONG = CONG1 CONGRESSIONAL DISTRICT
 DG RECORD - RESERVOIR PROJECT
 DG OAHE OAHE RESERVOIR
 RESID = OAHE RESERVOIR PROJECT ID
 RESTIT = OAHE RESERVOIR RESERVOIR PROJECT TITLE
 FS RECORD - FLOOD STAGE ELEVATION
 FS 20
 ZR RECORD - REACH DATA - DSS PATHNAME
 ZR A=MISSOURI B=RCH 7 C=ELEVATION-CURVES E=1992 F=AG-EXISTING
 CROPID = WHEAT
 CROPAR = 18.00 % OF REACH PLANTED
 CROPID = CORN
 CROPAR = 36.00 % OF REACH PLANTED
 CROPID = OATS
 CROPAR = 14.00 % OF REACH PLANTED
 CROPID = MILO
 CROPAR = 10.00 % OF REACH PLANTED

WRUID RCH 7	GUAGE GAGE 11	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASH SUBB	CONC CONG1	CNTY	FLOIST	LEVEE	CHANNEL	REBVR DAHE
ELEVATION	AREA	CUMULATIVE CROP AREA (ACRES)				OATS	MILO						
		WHEAT		CORN									
20.00	0.00	0.00		0.00		0.00		0.00					
30.00	789.00	142.02		284.04		110.46		78.90					
40.00	1775.00	319.50		639.00		248.50		177.50					
50.00	2615.00	470.70		941.40		306.10		261.50					
60.00	3459.00	622.82		1245.24		484.26		345.90					
70.00	3984.00	717.12		1344.24		587.76		398.40					
80.00	4448.00	800.28		1600.56		622.44		444.00					
90.00	4597.00	827.48		1654.82		643.58		459.70					
100.00	4689.00	844.02		1688.04		656.46		468.90					
110.00	4780.00	860.40		1720.80		669.20		478.00					
120.00	4855.00	873.90		1747.80		679.70		485.50					
130.00	4938.00	888.48		1776.96		691.04		493.80					
140.00	5048.00	908.64		1817.28		708.72		504.80					
150.00	5128.00	922.68		1845.38		717.64		512.80					
160.00	5190.00	934.20		1888.40		726.60		519.00					
170.00	5226.00	940.68		1881.36		731.64		522.60					

WATER RESOURCE UNIT
DR RCH 8 GAGE 11 O STANLEY COUNTY, DB OF FORT PIERRE

WRUID = RCH 8 WATER RESOURCE UNIT ID
GAUGE = GAGE 11
DELTTEL = 0.00 GAUGE ELEVATION OFFSET
WRUTIT = STANLEY COUNTY, DB OF FORT PIERRE

WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
DB OMAHA SD STAN MISS SUBB CONG1

DIST = OMAHA COE DISTRICT
STATE = SD
COUNTY = STAN
WATSHD = MISS WATERSHED
SUBASN = SUBB SUBBASIN
CONG = CONG1 CONGRESSIONAL DISTRICT

DS RECORD - RESERVOIR PROJECT
DS_OAHE RESERVOIR
RESID = OAHE RESERVOIR PROJECT ID
RESTIT = OAHE RESERVOIR RESERVOIR PROJECT TITLE

FS RECORD - FLOOD STAGE ELEVATION

FS 30

ZR RECORD - REACH DATA - DSS PATHNAME
ZR A=MISSOURI B=RCH 8 C=ELEVATION-CURVES E=1992 F=AG-EXISTING

CROPID = WHEAT

CROPAR = 29.00 % OF REACH PLANTED

CROPID = OATS

CROPAR = 21.00 % OF REACH PLANTED

CROPID = MILO

CROPAR = 50.00 % OF REACH PLANTED

WRUID	GAUGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASN	CONG	CNTY	FLDIST	LEVEE	CHANNEL	RESVR	OAME
RCH 8	GAGE 11	OMAHA	SD	STAN		MISS	SUBB	CONG1						

ELEVATION	CUMULATIVE CROP AREA (ACRES)		
	WHEAT	OATS	MILO
30.00	0.00	0.00	0.00
40.00	0.00	0.00	0.00
50.00	0.00	0.00	0.00
60.00	0.00	0.00	0.00
70.00	0.00	0.00	0.00
80.00	0.00	0.00	0.00
90.00	0.00	0.00	0.00
100.00	0.00	0.00	0.00
110.00	0.00	0.00	0.00
120.00	0.00	0.00	0.00
130.00	0.00	0.00	0.00
140.00	0.00	0.00	0.00
150.00	0.00	0.00	0.00
160.00	0.00	0.00	0.00
170.00	0.00	0.00	0.00

WATER RESOURCE UNIT
RCH 9 GAGE 11 O LOWER BRAILE RESERVATION, STANLEY COUNTY

WRUID = RCH 9 WATER RESOURCE UNIT ID
GAUGE = GAGE 11
DETEL = 0.00 GAUGE ELEVATION OFFSET
WRUTIT = LOWER BRAILE RESERVATION, STANLEY COUNTY

WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
DB OMAHA SD STAN MISS LBRU CONG1

DIST = OMAHA COE DISTRICT
STATE = SD
COUNTY = STAN
WATSHD = MISS WATERSHED
SUBASH = LBRU SUBBASIN
CONG = CONG1 CONGRESSIONAL DISTRICT

DS RECORD - RESERVOIR PROJECT
DS DAHE DAHE RESERVOIR
RESID = DAHE RESERVOIR PROJECT ID
RESTIT = DAHE RESERVOIR RESERVOIR PROJECT TITLE

FS RECORD - FLOOD STAGE ELEVATION
FS 20

ZR RECORD - REACH DATA - DSS PATHNAME
ZR A=MISSOURI B=RCH 9 C=ELEVATION-CURVES E=1992 F=AG-EXISTING

CROPID = WHEAT
CROPAR = 29.00 % OF REACH PLANTED

CROPID = OATS
CROPAR = 21.00 % OF REACH PLANTED

CROPID = MILO
CROPAR = 50.00 % OF REACH PLANTED

WRUID RCH 9	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY STAN	TOWN	WATSHD MISS	SUBASH LBRU	CONG CONG1	CNTY	FLDIST	LEVEE	CHANNEL	RESVR DAHE
----------------	------------------	--------------	-------------	----------------	------	----------------	----------------	---------------	------	--------	-------	---------	---------------

ELEVATION	AREA	CUMULATIVE CROP AREA (ACRES)		
		WHEAT	OATS	MILO
20.00	0.00	0.00	0.00	0.00
30.00	635.00	184.15	133.35	317.50
40.00	1730.00	501.70	363.30	866.00
50.00	2281.00	681.49	479.01	1140.50
60.00	2823.00	818.67	592.83	1411.50
70.00	3274.00	949.46	687.54	1637.00
80.00	3368.00	978.72	707.28	1684.00
90.00	3374.00	978.46	708.54	1687.00
100.00	3374.00	978.46	708.54	1687.00
110.00	3374.00	978.46	708.54	1687.00
120.00	3374.00	978.46	708.54	1687.00
130.00	3374.00	978.46	708.54	1687.00
140.00	3374.00	978.46	708.54	1687.00
150.00	3374.00	978.46	708.54	1687.00
160.00	3374.00	978.46	708.54	1687.00
170.00	3374.00	978.46	708.54	1687.00

WATER RESOURCE UNIT
DR RCH10 GAGE 11 O CROW CREEK RESERVATION, HUGHES COUNTY

WRUID = RCH10 WATER RESOURCE UNIT ID
GAUGE = GAGE 11
DETEL = 0.00 GAUGE ELEVATION OFFSET
WRUTIT = CROW CREEK RESERVATION, HUGHES COUNTY

WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
DB OMAHA SD HUGH MISS CROW CONG1

DIST = OMAHA COE DISTRICT
STATE = SD
COUNTY = HUGH
WATSHD = MISS WATERSHED
SUBASH = CROW SUBBASIN
CONG = CONG1 CONGRESSIONAL DISTRICT

DS RECORD - RESERVOIR PROJECT
DS DAHE DAHE RESERVOIR
RESID = DAHE RESERVOIR PROJECT ID
RESTIT = DAHE RESERVOIR RESERVOIR PROJECT TITLE

FS RECORD - FLOOD STAGE ELEVATION
FS 10

ZR RECORD - REACH DATA - DSS PATHNAME
ZR A=MISSOURI B=RCH 10 C=ELEVATION-CURVES E=1992 F=AG-EXISTING

CROPID = WHEAT
CROPAR = 18.00 % OF REACH PLANTED

CROPID = CORN
CROPAR = 38.00 % OF REACH PLANTED

CROPID = OATS
CROPAR = 14.00 % OF REACH PLANTED

CROPID = MILO
CROPAR = 10.00 % OF REACH PLANTED

WRUID	GAGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASH	CONG	CNTY	FLDIST	LEVEE	CHANNEL	RESVR	DAHE
RCH10	GAGE 11	OMAHA	SD	HUGH		MISS	CROW	CONG1						

ELEVATION	AREA	CUMULATIVE CROP AREA (ACRES)			
		WHEAT	CORN	OATS	MILO
10.00	0.00	0.00	0.00	0.00	
20.00	828.00	148.88	297.36	115.84	82.80
30.00	2383.00	428.34	850.88	330.82	236.30
40.00	4060.00	730.80	1461.60	568.40	406.00
50.00	5583.00	1001.34	2002.88	778.82	558.30
60.00	7550.00	1359.00	2718.00	1057.00	755.00
70.00	8874.00	1597.32	3194.84	1242.36	887.40
80.00	10118.00	1820.88	3641.76	1416.24	1011.60
90.00	11418.00	2055.24	4110.48	1598.52	1141.80
100.00	11868.00	2138.24	4272.48	1681.52	1186.80
110.00	11988.00	2158.02	4316.04	1678.46	1198.80
120.00	12078.00	2174.04	4348.08	1690.92	1207.80
130.00	12149.00	2186.82	4373.84	1700.88	1214.00
140.00	12202.00	2198.36	4392.72	1708.28	1220.20
150.00	12221.00	2199.78	4399.58	1710.94	1222.10
160.00	12245.00	2204.10	4408.20	1714.30	1224.50
170.00	12274.00	2209.32	4418.84	1718.38	1227.40

WATER RESOURCE UNIT
DR RCH11 GAGE 11 O LOWER BRULE RESERVATION, LYMAN COUNTY

WRUID = RCH11 WATER RESOURCE UNIT ID
GAUGE = GAGE 11
DETEL = 0.00 GAUGE ELEVATION OFFSET
WRUTIT = LOWER BRULE RESERVATION, LYMAN COUNTY

WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
DB OMAHA SD LYNN MISS LBRU CONG1

DIST = OMAHA COE DISTRICT
STATE = SD
COUNTY = LYNN
WATSHD = MISS WATERSHED
SUBASH = LBRU SUBASIN
CONG = CONG1 CONGRESSIONAL DISTRICT

DS RECORD - RESERVOIR PROJECT
DS_OAHE OAHE RESERVOIR
RESID = OAHE RESERVOIR PROJECT ID
RESTIT = OAHE RESERVOIR RESERVOIR PROJECT TITLE

FS RECORD - FLOOD STAGE ELEVATION
FS 0

ZR RECORD - REACH DATA - DSS PATHNAME
ZR A=MISSOURI B=RCH 11 C=ELEVATION-CURVES E=1982 F=AG-EXISTING

CROPID = CORN
CROPAR = 18.00 % OF REACH PLANTED
CROPID = OATS
CROPAR = 17.00 % OF REACH PLANTED
CROPID = MILO
CROPAR = 87.00 % OF REACH PLANTED

WRUID	GAUGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASH	CONG	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR	NAME
RCH11	GAGE 11	OMAHA	SD	LYNN		MISS	LBRU	CONG1						DAHE

ELEVATION	AREA	CUMULATIVE CROP AREA (ACRES)		
		CORN	OATS	MILO
0.00	0.00	0.00	0.00	0.00
10.00	526.00	84.16	89.42	352.42
20.00	3194.00	506.44	541.28	2133.28
30.00	5951.00	852.16	1011.87	3687.17
40.00	7537.00	1205.92	1281.29	5049.79
50.00	8749.00	1399.84	1487.33	5861.83
60.00	9722.00	1555.52	1652.74	6513.74
70.00	10653.00	1704.48	1811.01	7137.51
80.00	11756.00	1861.28	1998.86	7877.86
90.00	13452.00	2152.32	2286.84	9012.84
100.00	14509.00	2321.44	2468.53	9721.03
110.00	15073.00	2411.68	2582.41	10098.91
120.00	15489.00	2475.04	2629.73	10304.23
130.00	15996.00	2559.38	2719.32	10717.32
140.00	16496.00	2639.38	2804.32	11062.32
150.00	16844.00	2695.04	2863.48	11285.48
160.00	17212.00	2753.92	2926.04	11532.34
170.00	17590.00	2814.40	2990.30	11785.30

WATER RESOURCE UNIT
DR RCH12 GAGE 11 O CROW CREEK RESERVATION, HYDE COUNTY

WRUID = RCH12 WATER RESOURCE UNIT ID
GAUGE = GAGE 11
DELTOL = 0.00 GAUGE ELEVATION OFFSET
WRUTIT = CROW CREEK RESERVATION, HYDE COUNTY

WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
DS OHAMA SD HYDE MISS CROW CONG1

DIST = OMAHA COE DISTRICT
STATE = SD
COUNTY = HYDE
WATSHD = MISS WATERSHED
SUBASH = CROW SUBBASIN
CONG = CONG1 CONGRESSIONAL DISTRICT

DS RECORD - RESERVOIR PROJECT
DS DAHE DAHE RESERVOIR
RESID = DAHE RESERVOIR PROJECT ID
RESTIT = DAHE RESERVOIR RESERVOIR PROJECT TITLE

FS RECORD - FLOOD STAGE ELEVATION
FS 10

ZR RECORD - REACH DATA - OSS PATHNAME
ZR A=MISSOURI B=RCH 12 C=ELEVATION-CURVES E=1992 F=AG-EXISTING

CROPID = WHEAT
CROPAR = 29.00 % OF REACH PLANTED

CROPID = OATS
CROPAR = 36.00 % OF REACH PLANTED

CROPID = MILO
CROPAR = 17.00 % OF REACH PLANTED

WRUID	GAUGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASH	CONG	CNTY	FLDIST	LEVEE	CHANNEL	RESVR	DAHE
RCH12	GAGE 11	OMAHA	SD	HYDE		MISS	CROW	CONG1						

ELEVATION	AREA	CUMULATIVE CROP AREA (ACRES)		
		WHEAT	OATS	MILO
10.00	0.00	0.00	0.00	0.00
20.00	14.00	4.06	5.04	2.38
30.00	46.00	13.34	16.56	7.82
40.00	62.00	17.98	22.32	10.54
50.00	77.00	22.33	27.72	13.09
60.00	88.00	28.42	35.28	16.88
70.00	149.00	43.21	53.64	25.33
80.00	208.30	60.32	74.88	35.38
90.00	255.00	73.95	91.80	43.35
100.00	329.00	95.41	118.44	56.93
110.00	406.00	117.74	148.18	69.02
120.00	473.00	137.17	170.28	80.41
130.00	553.00	160.37	199.08	94.01
140.00	627.00	181.63	225.72	106.59
150.00	695.00	201.55	250.20	118.15
160.00	753.00	218.37	271.08	128.01
170.00	803.00	232.87	289.08	138.51

WATER RESOURCE UNIT
DR RCH13 GAGE 11 O CROW CREEK RESERVATION, BUFFALO COUNTY

WRUID = RCH13 WATER RESOURCE UNIT ID
GAUGE = GAGE 11
DETEL = 0.00 GAUGE ELEVATION OFFSET
WRUTIT = CROW CREEK RESERVATION, BUFFALO COUNTY

WATER RESOURCE UNIT BOUNDARY SPECIFICATIONS
DB OMAHA SD BUFF MISS CROW CONG1

DIST = OMAHA COE DISTRICT
STATE = SD
COUNTY = BUFF
WATSHD = MISS WATERSHED
SUBASH = CROW SUBBASIN
CONG = CONG1 CONGRESSIONAL DISTRICT

DS RECORD - RESERVOIR PROJECT
DS DAHE DAHE RESERVOIR
RESID = DAHE RESERVOIR PROJECT ID
REBTIT = DAHE RESERVOIR RESERVOIR PROJECT TITLE

FS RECORD - FLOOD STAGE ELEVATION

FS 0

ZR RECORD - REACH DATA - DSS PATHNAME
ZR A=MISSOURI B=RCH 13 C=ELEVATION-CURVES E=1902 F=AG-EXISTING

CROPID = WHEAT
CROPAR = 14.00 % OF REACH PLANTED
CROPID = CORN
CROPAR = 39.00 % OF REACH PLANTED
CROPID = OATS
CROPAR = 12.00 % OF REACH PLANTED
CROPID = MILO
CROPAR = 25.00 % OF REACH PLANTED

WRUID	GAUGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASH	CONG	COUNTY	FLDIST	LEVEE	CHANNEL	RESVR	DAHE
RCH13	GAGE 11	OMAHA	SD	BUFF		MISS	CROW	CONG1					DAHE	

ELEVATION	AREA	CUMULATIVE CROP AREA (ACRES)			
		WHEAT	CORN	OATS	MILO
0.00	0.00	0.00	0.00	0.00	
10.00	182.00	25.48	70.98	21.84	
20.00	202.00	28.28	78.78	24.24	
30.00	321.00	44.94	126.19	38.52	
40.00	597.00	83.58	232.83	71.84	
50.00	1350.00	189.00	526.50	162.00	
60.00	2844.00	398.18	1109.18	341.28	
70.00	5087.00	709.38	1978.13	606.04	
80.00	6319.00	884.88	2464.41	758.28	
90.00	8899.00	985.86	2690.61	827.88	
100.00	7270.00	1017.80	2836.30	872.40	
110.00	7487.00	1048.18	2919.93	896.44	
120.00	7628.00	1087.92	2974.92	915.36	
130.00	7699.00	1077.88	3002.81	923.88	
140.00	7758.00	1085.84	3024.84	930.72	
150.00	7818.00	1094.52	3049.02	938.18	
160.00	7864.00	1100.96	3068.96	943.88	
170.00	7901.00	1106.14	3081.39	948.12	
				1975.25	

Analysis Program Input Data

T1 MISSOURI RIVER
T2 OAME DAM TO BIG BEND DAM IN SOUTH DAKOTA
T3 TEST INPUT DATA FOR USE IN THE OMAHA DISTRICTS RMS
J1 1 0
JE 02JUN83 10JUN83
PB OAME 100
TA TRACE ALL
EJ

Analysis Program Output

```
*****  
* FLOOD DAMAGE PROJECT BENEFIT ACCOMPLISHMENT *  
* ANALYSIS PROGRAM *  
* SEPTEMBER 1991 *  
* VERSION 1.00 *  
* RUN DATE 24 JUL 92 TIME 12:46:20 *  
*****
```

```
*****  
* U. S. ARMY CORPS OF ENGINEERS *  
* THE HYDROLOGIC ENGINEERING CENTER *  
* 609 SECOND STREET, SUITE D *  
* DAVIS, CALIFORNIA 95616 *  
* (916) 756-1104 FAX (916) 756-8250 *  
*****
```

XXXXXX XXX XXXXX X X X X X X
X X X X X X X X X X X X X X
XXX X X X X X X X X X X X X
X X X X X X X X X X X X X X
X X X X X X X X X X X X X X

MISSOURI RIVER
OAHÉ DAM TO BIG BEND DAM IN SOUTH DAKOTA
TEST INPUT DATA FOR USE IN THE OMAHA DISTRICTS RMS
GAUGE HYDROGRAPHS

	GAGE 3 W/O	GAGE 4 W/O	GAGE 11 W/O
153	2 JUN 93	60.0	40.0
154	3 JUN 93	70.0	43.0
155	4 JUN 93	80.0	46.0
156	5 JUN 93	90.0	47.0
157	6 JUN 93	95.0	46.0
158	7 JUN 93	90.0	43.0
159	8 JUN 93	80.0	41.0
160	9 JUN 93	70.0	40.0
161	10 JUN 93	60.0	40.0

WRUID GAUGE COE STATE COUNTY TOWN WATSHD SUBASN CONG
RCH 1 GAGE 3 OMAHA SD HUGH MISS SUBA CONG1
RESVR
OAE

SPRING WHEAT

ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS			WITH PROJECT CONDITIONS		
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)
1	40.0-	50.0	0.00	0.00	0.00	0.00	0.00
2	50.0-	60.0	0.00	0.00	0.00	0.00	0.00
3	60.0-	70.0	0.00	0.00	0.00	0.00	0.00
4	70.0-	80.0	0.00	0.00	0.00	0.00	0.00
5	80.0-	90.0	0.00	0.00	0.00	0.00	0.00
6	90.0-	100.0	0.00	0.00	0.00	0.00	0.00
7	100.0-	110.0	0.00	0.00	0.00	0.00	0.00
8	110.0-	120.0	0.00	0.00	0.00	0.00	0.00
9	120.0-	130.0	0.00	0.00	0.00	0.00	0.00
10	130.0-	140.0	0.00	0.00	0.00	0.00	0.00
11	140.0-	150.0	0.00	0.00	0.00	0.00	0.00
12	150.0-	160.0	0.00	0.00	0.00	0.00	0.00
13	160.0-	170.0	0.00	0.00	0.00	0.00	0.00
	TOTAL		0.00	0.00	0.00	0.00	0.00

CORN

ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS			WITH PROJECT CONDITIONS		
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)
1	40.0-	50.0	0.00	0.00	0.00	0.00	0.00
2	50.0-	60.0	0.00	0.00	0.00	0.00	0.00
3	60.0-	70.0	0.00	0.00	0.00	0.00	0.00
4	70.0-	80.0	0.00	0.00	0.00	0.00	0.00
5	80.0-	90.0	0.00	0.00	0.00	0.00	0.00
6	90.0-	100.0	0.00	0.00	0.00	0.00	0.00
7	100.0-	110.0	0.00	0.00	0.00	0.00	0.00
8	110.0-	120.0	0.00	0.00	0.00	0.00	0.00
9	120.0-	130.0	0.00	0.00	0.00	0.00	0.00
10	130.0-	140.0	0.00	0.00	0.00	0.00	0.00
11	140.0-	150.0	0.00	0.00	0.00	0.00	0.00
12	150.0-	160.0	0.00	0.00	0.00	0.00	0.00
13	160.0-	170.0	0.00	0.00	0.00	0.00	0.00
	TOTAL		0.00	0.00	0.00	0.00	0.00

WRLID RCH 1	GAUGE GAGE 3	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	CHNTY	FLDST	LEVEE	CHANNEL	RESVR QAHE
----------------	-----------------	--------------	-------------	----------------	------	----------------	----------------	---------------	-------	-------	-------	---------	---------------

OATS

ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS			WITH PROJECT CONDITIONS			WITH PROJECT CONDITIONS		
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)
1	40.0-	50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	50.0-	60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3	60.0-	70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4	70.0-	80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	80.0-	90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	TOTAL		0.00	0.00		0.00		0.00		0.00

SORGHUM

ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS			WITH PROJECT CONDITIONS			WITH PROJECT CONDITIONS		
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)
1	40.0-	50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	50.0-	60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3	60.0-	70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4	70.0-	80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	80.0-	90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	TOTAL		0.00	0.00		0.00		0.00		0.00

WRUID RCH 1	GAUGE GAGE 3	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR DAHE	
AREA FLOODED														
AGRICULTURAL DAMAGE CATEGORIES														
SPRING WHEAT														
CORN														
OATS														
SORGHUM														
TOTAL														
FLOOD DAMAGE														
STRUCTURES FLOODED														
URBAN DAMAGE CATEGORIES														
TOTAL														
WATER RESOURCE UNIT TOTALS														
DAMAGE (\$1000)														
STRUCTURES FLOODED														
PEOPLE FLOODED														
AREA FLOODED (ACRES)														
PROJECT ACCOMPLISHMENTS														

WFLID RCH 2	GAUGE GAGE 4	COE OMAHA	STATE SD	COUNTY STAN	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	CMTY	FLDIST	LEVEE	CHANNEL	RESVR OAME	
SPRING WHEAT														
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)				AREA FLOODED (ACRES)
1	40.0-	50.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
2	50.0-	60.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
3	60.0-	70.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
4	70.0-	80.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
5	80.0-	90.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
6	90.0-	100.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
7	100.0-	110.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
8	110.0-	120.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
9	120.0-	130.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
10	130.0-	140.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
11	140.0-	150.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
12	150.0-	160.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
13	160.0-	170.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
	TOTAL		0.00			0.00				0.00			0.00	0.00
OATS														
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)				AREA FLOODED (ACRES)
1	40.0-	50.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
2	50.0-	60.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
3	60.0-	70.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
4	70.0-	80.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
5	80.0-	90.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
6	90.0-	100.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
7	100.0-	110.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
8	110.0-	120.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
9	120.0-	130.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
10	130.0-	140.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
11	140.0-	150.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
12	150.0-	160.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
13	160.0-	170.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00
	TOTAL		0.00			0.00				0.00			0.00	0.00

WRUID RCH 2	GAUGE GAGE 4	COE OMAHA	STATE SD	COUNTY STAN	TOWN MISS	WATSHD SUBASN	SUBA SUBA	CONG CONG1	CMNTY FLDIST	LEVEE CHANNEL	CHANL RESVR OAHE	
SORGHUM												
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				PROJECT CONDITIONS OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)		
1	40.0-	50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	50.0-	60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3	60.0-	70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4	70.0-	80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	80.0-	90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
6	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
7	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
8	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
9	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
12	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
13	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
TOTAL			0.00			0.00		0.00		0.00	0.00	

MRUID RCH 2	GAUGE GAGE 4	COE OMAHA	STATE SD	COUNTY STAN	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHÉ
AREA FLOODED													
FLOOD DAMAGE													
AGRICULTURAL DAMAGE CATEGORIES													
STRUCTURES FLOODED													
FLOOD DAMAGE													
URBAN DAMAGE CATEGORIES													
WATER RESOURCE UNIT TOTALS													
PROJECT ACCOMPLISHMENTS													
DAMAGE (\$1000)								0.00		0.00			
STRUCTURES FLOODED								0.00		0.00			
PEOPLE FLOODED								0.00		0.00			
AREA FLOODED (ACRES)								0.00		0.00			

WRUID RCH 3	GAUGE GAGE 3	COE OMAHA	STATE SD	COUNTY HUGH	TOWN MISS	WATSHD SUBASN	SUBA CONG1	CNTY FLDIST	LEVEE	CHANNEL	RESVR DAHE
RESIDENTIAL											
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)			WITH PROJECT CONDITIONS DAMAGE (\$1000)			STRUCTURES			
1	66.0-	68.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	68.0-	70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3	70.0-	72.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4	72.0-	74.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	74.0-	76.0	115.54	115.54	10.50	10.50	115.54	115.54	10.50	10.50	10.50
6	76.0-	78.0	555.58	555.58	28.50	28.50	555.58	555.58	28.50	28.50	28.50
7	78.0-	80.0	823.54	823.54	34.50	34.50	823.54	823.54	34.50	34.50	34.50
8	80.0-	82.0	1113.21	1113.21	22.50	22.50	1113.21	1113.21	22.50	22.50	22.50
9	82.0-	84.0	1105.53	1105.53	28.50	28.50	1105.53	1105.53	28.50	28.50	28.50
10	84.0-	86.0	1324.59	1324.59	33.00	33.00	1324.59	1324.59	33.00	33.00	33.00
11	86.0-	88.0	1312.33	1312.33	27.00	27.00	1312.33	1312.33	27.00	27.00	27.00
12	88.0-	90.0	1383.16	1383.16	31.50	31.50	1383.16	1383.16	31.50	31.50	31.50
13	90.0-	92.0	1376.23	1376.23	34.50	34.50	1376.23	1376.23	34.50	34.50	34.50
14	92.0-	94.0	1685.78	1685.78	61.50	61.50	1685.78	1685.78	61.50	61.50	61.50
15	94.0-	96.0	929.89	929.89	33.75	33.75	929.89	929.89	33.75	33.75	33.75
16	96.0-	98.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
17	98.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
TOTAL			11725.38		345.75		11725.38		345.75		345.75

WRUID RCH 3	GAUGE GAGE 3	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	CNNTY	FLDST	LEVEE	CHANNEL	RESVR DAHE
COMMERCIAL													
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS				WITH PROJECT CONDITIONS							
		DAMAGE (\$1000)				DAMAGE (\$1000)				STRUCTURES			
1	66.0-	68.0		0.00		0.00		0.00		0.00		0.00	
2	68.0-	70.0		0.00		0.00		0.00		0.00		0.00	
3	70.0-	72.0		0.00		0.00		0.00		0.00		0.00	
4	72.0-	74.0		0.00		0.00		0.00		0.00		0.00	
5	74.0-	76.0		0.00		0.00		0.00		0.00		0.00	
6	76.0-	78.0		0.00		0.00		0.00		0.00		0.00	
7	78.0-	80.0		0.00		0.00		0.00		0.00		0.00	
8	80.0-	82.0		0.00		0.00		0.00		0.00		0.00	
9	82.0-	84.0		99.07		1.30		99.07		1.30		1.30	
10	84.0-	86.0		341.72		2.80		341.72		2.80		2.80	
11	86.0-	88.0		395.10		1.80		395.10		1.80		1.80	
12	88.0-	90.0		453.21		1.60		453.21		1.60		1.60	
13	90.0-	92.0		597.66		1.60		597.66		1.60		1.60	
14	92.0-	94.0		725.17		1.60		725.17		1.60		1.60	
15	94.0-	96.0		406.23		0.85		406.23		0.85		0.85	
16	96.0-	98.0		0.00		0.00		0.00		0.00		0.00	
17	98.0-	100.0		0.00		0.00		0.00		0.00		0.00	
	TOTAL			3018.16		11.55		3018.16		11.55		11.55	

WRUID RCH 3	GAUGE GAGE 3	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN	CONG CONG1	CHANNEL	LEVEE	FLDIST	RESVR OAHE	
INDUSTRIAL													
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)				STRUCTURES			
1	66.0-	68.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	68.0-	70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3	70.0-	72.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4	72.0-	74.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	74.0-	76.0	6.30	6.30	0.25	0.25	6.30	6.30	0.25	0.25	0.25	0.25	
6	76.0-	78.0	11.94	11.94	0.25	0.25	11.94	11.94	0.25	0.25	0.25	0.25	
7	78.0-	80.0	57.16	57.16	1.50	1.50	57.16	57.16	1.50	1.50	1.50	1.50	
8	80.0-	82.0	428.68	428.68	6.00	6.00	428.68	428.68	6.00	6.00	6.00	6.00	
9	82.0-	84.0	1411.19	1411.19	6.50	6.50	1411.19	1411.19	6.50	6.50	6.50	6.50	
10	84.0-	86.0	1903.21	1903.21	5.75	5.75	1903.21	1903.21	5.75	5.75	5.75	5.75	
11	86.0-	88.0	2639.03	2639.03	6.75	6.75	2639.03	2639.03	6.75	6.75	6.75	6.75	
12	88.0-	90.0	3875.92	3875.92	7.50	7.50	3875.92	3875.92	7.50	7.50	7.50	7.50	
13	90.0-	92.0	4500.86	4500.86	7.00	7.00	4500.86	4500.86	7.00	7.00	7.00	7.00	
14	92.0-	94.0	4353.13	4353.13	8.75	8.75	4353.13	4353.13	8.75	8.75	8.75	8.75	
15	94.0-	96.0	1738.22	1738.22	3.13	3.13	1738.22	1738.22	3.13	3.13	3.13	3.13	
16	96.0-	98.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
17	98.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
TOTAL			20925.65		53.38		20925.65		53.38		53.38		

WRUID RCH 3	GAUGE GAGE 3	COE OMAHA	STATE SD	COUNTY HUGH	TOWN MISS	WATSHD SUBASN	SUBA	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR QAH	
PUBLIC WORKS														
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS						WITH PROJECT CONDITIONS						
		DAMAGE (\$1000)	STRUCTURES					DAMAGE (\$1000)	STRUCTURES					
1	66.0-	98.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	68.0-	70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3	70.0-	72.0	80.06	1.00	80.06	1.00	80.06	80.06	1.00	80.06	1.00	80.06	1.00	
4	72.0-	74.0	188.48	2.50	188.48	2.50	188.48	188.48	2.50	188.48	2.50	188.48	2.50	
5	74.0-	76.0	308.96	2.00	308.96	2.00	308.96	308.96	2.00	308.96	2.00	308.96	2.00	
6	76.0-	78.0	516.86	3.00	516.86	3.00	516.86	516.86	3.00	516.86	3.00	516.86	3.00	
7	78.0-	80.0	1056.56	2.00	1056.56	2.00	1056.56	1056.56	2.00	1056.56	2.00	1056.56	2.00	
8	80.0-	82.0	1423.72	3.50	1423.72	3.50	1423.72	1423.72	3.50	1423.72	3.50	1423.72	3.50	
9	82.0-	84.0	1839.84	2.50	1839.84	2.50	1839.84	1839.84	2.50	1839.84	2.50	1839.84	2.50	
10	84.0-	86.0	1864.54	4.00	1864.54	4.00	1864.54	1864.54	4.00	1864.54	4.00	1864.54	4.00	
11	86.0-	88.0	2242.84	3.50	2242.84	3.50	2242.84	2242.84	3.50	2242.84	3.50	2242.84	3.50	
12	88.0-	90.0	2169.27	3.00	2169.27	3.00	2169.27	2169.27	3.00	2169.27	3.00	2169.27	3.00	
13	90.0-	92.0	2489.36	1.00	2489.36	1.00	2489.36	2489.36	1.00	2489.36	1.00	2489.36	1.00	
14	92.0-	94.0	2275.53	0.00	2275.53	0.00	2275.53	2275.53	0.00	2275.53	0.00	2275.53	0.00	
15	94.0-	96.0	1113.38	0.00	1113.38	0.00	1113.38	1113.38	0.00	1113.38	0.00	1113.38	0.00	
16	96.0-	98.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
17	98.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	TOTAL		17569.39	28.00		17569.39		17569.39	28.00		17569.39		17569.39	28.00

MRUID RCH 3	Gauge GAGE 3	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN	CONG CONG1	CNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHE
OPEN SPACE													
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)				STRUCTURES			
1	66.0-	68.0	5.91	0.10	5.91	0.10	5.91	0.10	5.91	0.10	0.10	0.10	0.10
2	68.0-	70.0	12.17	1.30	12.17	1.30	12.17	1.30	12.17	1.30	1.30	1.30	1.30
3	70.0-	72.0	36.99	3.80	36.99	3.80	36.99	3.80	36.99	3.80	3.80	3.80	3.80
4	72.0-	74.0	66.48	3.20	66.48	3.20	66.48	3.20	66.48	3.20	3.20	3.20	3.20
5	74.0-	76.0	75.72	3.60	75.72	3.60	75.72	3.60	75.72	3.60	3.60	3.60	3.60
6	76.0-	78.0	75.84	3.50	75.84	3.50	75.84	3.50	75.84	3.50	3.50	3.50	3.50
7	78.0-	80.0	73.02	2.10	73.02	2.10	73.02	2.10	73.02	2.10	2.10	2.10	2.10
8	80.0-	82.0	63.36	2.70	63.36	2.70	63.36	2.70	63.36	2.70	2.70	2.70	2.70
9	82.0-	84.0	56.12	1.90	56.12	1.90	56.12	1.90	56.12	1.90	1.90	1.90	1.90
10	84.0-	86.0	52.34	2.10	52.34	2.10	52.34	2.10	52.34	2.10	2.10	2.10	2.10
11	86.0-	88.0	51.77	1.90	51.77	1.90	51.77	1.90	51.77	1.90	1.90	1.90	1.90
12	88.0-	90.0	47.02	1.00	47.02	1.00	47.02	1.00	47.02	1.00	1.00	1.00	1.00
13	90.0-	92.0	31.42	0.70	31.42	0.70	31.42	0.70	31.42	0.70	0.70	0.70	0.70
14	92.0-	94.0	24.97	0.50	24.97	0.50	24.97	0.50	24.97	0.50	0.50	0.50	0.50
15	94.0-	96.0	12.79	0.50	12.79	0.50	12.79	0.50	12.79	0.50	0.50	0.50	0.50
16	96.0-	98.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
17	98.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
TOTAL			685.92	28.90	685.92	28.90	685.92	28.90	685.92	28.90	28.90	28.90	28.90

WRAID RCH 3	GUAGE GAGE 3	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN SUBA	CONG CNG1	CNTY	FLDIST	LEVEE	CHANNEL	RESVR DAHE
AREA FLOODED													
AGRICULTURAL DAMAGE CATEGORIES				WITHOUT PROJECT (ACRES)	WITH PROJECT (ACRES)		AREA MODIFIED (ACRES)		WITHOUT PROJECT (\$1000)	WITH PROJECT (\$1000)		DAMAGE REDUCED (\$1000)	
				0.00	0.00		0.00		0.00	0.00		0.00	
TOTAL				0.00	0.00		0.00		0.00	0.00		0.00	
STRUCTURES FLOODED													
URBAN DAMAGE CATEGORIES				WITHOUT PROJECT	WITH PROJECT		STRUCTURES MODIFIED		WITHOUT PROJECT (\$1000)	WITH PROJECT (\$1000)		DAMAGE REDUCED (\$1000)	
RESIDENTIAL		345.75		345.75			0.00		11725.38	11725.38		0.00	
COMMERCIAL		11.55		11.55			0.00		3018.16	3018.16		0.00	
INDUSTRIAL		53.38		53.38			0.00		20925.65	20925.65		0.00	
PUBLIC WORKS		28.00		28.00			0.00		17569.39	17569.39		0.00	
OPEN SPACE		28.90		28.90			0.00		685.92	685.92		0.00	
TOTAL		467.57		467.57			0.00		53924.51	53924.51		0.00	
WATER RESOURCE UNIT TOTALS													
DAMAGE (\$1000)				WITHOUT PROJECT CONDITIONS			WITH PROJECT CONDITIONS		PROJECT ACCOMPLISHMENTS				
STRUCTURES FLOODED				53924.51			53924.51		0.00				
PEOPLE FLOODED				467.57			467.57		0.00				
AREA FLOODED (ACRES)				0.00			0.00		0.00				
				0.00			0.00		0.00				

ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS				WITH PROJECT CONDITIONS			
		DAMAGE (\$1000)	STRUCTURES	DAMAGE (\$1000)	STRUCTURES				
1	40.0-	41.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	41.0-	42.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3	42.0-	43.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4	43.0-	44.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	44.0-	45.0	364.77	49.50	364.77	49.50	364.77	49.50	19.50
6	45.0-	46.0	1621.62	79.50	1621.62	79.50	1621.62	79.50	79.50
7	46.0-	47.0	1401.51	34.50	1401.51	34.50	1401.51	34.50	34.50
8	47.0-	48.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9	48.0-	49.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	49.0-	50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	50.0-	51.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	51.0-	52.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	52.0-	53.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
14	53.0-	54.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	54.0-	55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
16	55.0-	56.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
17	56.0-	57.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
TOTAL		33387.90		163.50		33387.90		163.50	

WRUID RCH 4	GAUGE GAGE 4	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHÉ
INDUSTRIAL													
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				STRUCTURES				WITH PROJECT CONDITIONS DAMAGE (\$1000)			
1	40.0-	41.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	41.0-	42.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3	42.0-	43.0	0.00	0.00	1778.78	6.00	1778.78	6.00	1703.87	2.00	1703.87	2.00	0.00
4	43.0-	44.0	0.00	0.00	1703.87	2.00	524.40	0.50	524.40	0.50	903.61	2.50	0.00
5	44.0-	45.0	0.00	0.00	903.61	2.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6	45.0-	46.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7	46.0-	47.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8	47.0-	48.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9	48.0-	49.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	49.0-	50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	50.0-	51.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	51.0-	52.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	52.0-	53.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
14	53.0-	54.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	54.0-	55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
16	55.0-	56.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
17	56.0-	57.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
TOTAL			4910.66				11.00			4910.66		11.00	

MRUID RCH 4	GAUGE GAGE 4	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	CMNTY	FLODIST	LEVEE	CHANNEL	RESVR DAHE	
PUBLIC WORKS														
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS						WITH PROJECT CONDITIONS						
		DAMAGE (\$1000)	STRUCTURES					DAMAGE (\$1000)	STRUCTURES					
1	40.0-	41.0		0.00				0.00	0.00					0.00
2	41.0-	42.0		0.00				0.00	0.00					0.00
3	42.0-	43.0		0.00				0.00	0.00					0.00
4	43.0-	44.0		0.00				0.00	0.00					0.00
5	44.0-	45.0		0.00				0.00	0.00					0.00
6	45.0-	46.0		0.00				0.00	0.00					0.00
7	46.0-	47.0		0.00				0.00	0.00					0.00
8	47.0-	48.0		0.00				0.00	0.00					0.00
9	48.0-	49.0		0.00				0.00	0.00					0.00
10	49.0-	50.0		0.00				0.00	0.00					0.00
11	50.0-	51.0		0.00				0.00	0.00					0.00
12	51.0-	52.0		0.00				0.00	0.00					0.00
13	52.0-	53.0		0.00				0.00	0.00					0.00
14	53.0-	54.0		0.00				0.00	0.00					0.00
15	54.0-	55.0		0.00				0.00	0.00					0.00
16	55.0-	56.0		0.00				0.00	0.00					0.00
17	56.0-	57.0		0.00				0.00	0.00					0.00
		TOTAL		0.00				0.00						0.00

WRUID RCH 4	Gauge Gage 4	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR QAHE
OPEN SPACE													
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)				STRUCTURES			
1	40.0-	41.0		0.03		0.00		0.00		0.03		0.00	
2	41.0-	42.0		0.14		0.00		0.00		0.14		0.00	
3	42.0-	43.0		0.48		0.00		0.00		0.48		0.00	
4	43.0-	44.0		0.66		0.00		0.00		0.66		0.00	
5	44.0-	45.0		0.82		0.00		0.00		0.82		0.00	
6	45.0-	46.0		0.95		0.00		0.00		0.95		0.00	
7	46.0-	47.0		1.08		0.00		0.00		1.08		0.00	
8	47.0-	48.0		0.00		0.00		0.00		0.00		0.00	
9	48.0-	49.0		0.00		0.00		0.00		0.00		0.00	
10	49.0-	50.0		0.00		0.00		0.00		0.00		0.00	
11	50.0-	51.0		0.00		0.00		0.00		0.00		0.00	
12	51.0-	52.0		0.00		0.00		0.00		0.00		0.00	
13	52.0-	53.0		0.00		0.00		0.00		0.00		0.00	
14	53.0-	54.0		0.00		0.00		0.00		0.00		0.00	
15	54.0-	55.0		0.00		0.00		0.00		0.00		0.00	
16	55.0-	56.0		0.00		0.00		0.00		0.00		0.00	
17	56.0-	57.0		0.00		0.00		0.00		0.00		0.00	
TOTAL				4.15		0.00		0.00		4.15		0.00	

WRUID RCH 4	GAUGE GAGE 4	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR DAHE
----------------	-----------------	--------------	-------------	----------------	------	----------------	----------------	---------------	-------	--------	-------	---------	---------------

AREA FLOODED													
												FLOOD DAMAGE	
WITHOUT PROJECT (ACRES)		WITH PROJECT (ACRES)		AREA MODIFIED (ACRES)			WITHOUT PROJECT (\\$1000)	WITH PROJECT (\\$1000)	DAMAGE REDUCED (\\$1000)				
AGRICULTURAL DAMAGE CATEGORIES													
TOTAL		0.00		0.00		0.00		0.00		0.00		0.00	

STRUCTURES FLOODED													
												FLOOD DAMAGE	
WITHOUT PROJECT		WITH PROJECT		STRUCTURES MODIFIED			WITHOUT PROJECT (\\$1000)	WITH PROJECT (\\$1000)	DAMAGE REDUCED (\\$1000)				
URBAN DAMAGE CATEGORIES		163.50		163.50		0.00		3387.90		3387.90		0.00	
RESIDENTIAL		0.00		0.00		0.00		0.00		0.00		0.00	
COMMERCIAL		11.00		11.00		0.00		4910.66		4910.66		0.00	
INDUSTRIAL		0.00		0.00		0.00		0.00		0.00		0.00	
PUBLIC WORKS		0.00		0.00		0.00		4.15		4.15		0.00	
OPEN SPACE		0.00		0.00		0.00		0.00		0.00		0.00	
TOTAL		174.50		174.50		0.00		8302.71		8302.71		0.00	

WATER RESOURCE UNIT													
												PROJECT ACCOMPLISHMENTS	
TOTALS		WITHOUT PROJECT CONDITIONS				WITH PROJECT CONDITIONS							
DAMAGE (\$1000)		8302.71		174.50		8302.71		174.50		0.00		0.00	
STRUCTURES FLOODED		0.00		0.00		0.00		0.00		0.00		0.00	
PEOPLE FLOODED		0.00		0.00		0.00		0.00		0.00		0.00	
AREA FLOODED (ACRES)		0.00		0.00		0.00		0.00		0.00		0.00	

WRIID RCH 6	GAUGE GAGE 4	COE OMAHA	STATE SD	COUNTY STAN	TOWN WATSHD	SUBASN MISS	SUBA	CONG CONG1	CNTY	FLDIST	LEVEE	CHANNEL	RESVA OAH		
SPRING WHEAT															
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS OTHER LOSS (\$1000)	
1	40.0-	50.0	5.02	0.25	117.33	5.02	0.25	0.00	0.00	0.00	0.00	0.00	0.00	117.33	
2	50.0-	60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3	60.0-	70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4	70.0-	80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	80.0-	90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
6	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
7	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
8	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
9	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
12	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
13	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
TOTAL			5.02	0.25	117.33		5.02	0.25	0.00	0.00	0.00	0.00	0.00	117.33	
OATS														OATS	
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS OTHER LOSS (\$1000)	
1	40.0-	50.0	1.43	0.07	84.97	1.43	0.07	0.00	0.00	0.00	0.00	0.00	0.00	84.97	
2	50.0-	60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3	60.0-	70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4	70.0-	80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	80.0-	90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
6	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
7	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
8	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
9	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
12	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
13	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
TOTAL			1.43	0.07	84.97		1.43	0.07	0.00	0.00	0.00	0.00	0.00	84.97	

WRUID RCH 6	GAUGE GAGE 4	COE OMAHA	STATE SD	COUNTY STAN	TOWN MISS	WATSHD SUBASN	SUBA CONG1	CNTY FLDIST	LEVEE CHANNEL	RESVR OAH	
SORGHUM											
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE OTHER LOSS AREA FLOODED (\$1000) (\$1000) (ACRES)				WITH PROJECT CONDITIONS DAMAGE OTHER LOSS AREA FLOODED (\$1000) (\$1000) (ACRES)					
1	40.0-	50.0	0.97	0.05		202.30	0.97	0.05		202.30	
2	50.0-	60.0	0.00	0.00		0.00	0.00	0.00		0.00	
3	60.0-	70.0	0.00	0.00		0.00	0.00	0.00		0.00	
4	70.0-	80.0	0.00	0.00		0.00	0.00	0.00		0.00	
5	80.0-	90.0	0.00	0.00		0.00	0.00	0.00		0.00	
6	90.0-	100.0	0.00	0.00		0.00	0.00	0.00		0.00	
7	100.0-	110.0	0.00	0.00		0.00	0.00	0.00		0.00	
8	110.0-	120.0	0.00	0.00		0.00	0.00	0.00		0.00	
9	120.0-	130.0	0.00	0.00		0.00	0.00	0.00		0.00	
10	130.0-	140.0	0.00	0.00		0.00	0.00	0.00		0.00	
11	140.0-	150.0	0.00	0.00		0.00	0.00	0.00		0.00	
12	150.0-	160.0	0.00	0.00		0.00	0.00	0.00		0.00	
13	160.0-	170.0	0.00	0.00		0.00	0.00	0.00		0.00	
TOTAL			0.97			202.30	0.97	0.05		202.30	

WRUID RCH 6	GAGE GAGE 4	COE OMAHA	STATE SD	COUNTY STAN	TOWN	WATSHD MISS	SUBASN SUBA	CONG CONG1	CHNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHE	
AREA FLOODED														
WITHOUT PROJECT (ACRES)														
WITH PROJECT (ACRES)														
AGRICULTURAL DAMAGE CATEGORIES														
SPRING WHEAT														
OATS	117.33	117.33	0.00											
SORGHUM	84.97	84.97	0.00											
OTHER LOSSES	202.30	202.30	0.00											
TOTAL	404.60	404.60	0.00											
FLOOD DAMAGE														
WITHOUT PROJECT (\$1000)														
WITH PROJECT (\$1000)														
DAMAGE REDUCED (\$1000)														
STRUCTURES FLOODED														
WITHOUT PROJECT														
WITH PROJECT														
URBAN DAMAGE CATEGORIES														
STRUCTURES														
TOTAL														
FLOOD DAMAGE														
WITHOUT PROJECT (\$1000)														
WITH PROJECT (\$1000)														
DAMAGE REDUCED (\$1000)														
WATER RESOURCE UNIT TOTALS														
WITHOUT PROJECT CONDITIONS														
WITH PROJECT CONDITIONS														
PROJECT ACCOMPLISHMENTS														
DAMAGE (\$1000)														
STRUCTURES FLOODED	7.78	0.00	0.00											
PEOPLE FLOODED	0.00	0.00	0.00											
AREA FLOODED (ACRES)	404.60	404.60	404.60											

WRUID RCH 7	GUAGE GAGE 11	COE OMAHA	STATE SD	COUNTY HUGH	TOWN MISS	WATSHD SUBASN	CONG CONG1	CHNTY FLDIST	LEVEE	CHANNEL	RESVR OAME	
SPRING WHEAT												
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS				WITH PROJECT CONDITIONS						
		DAMAGE (\$1000)				DAMAGE (\$1000)						
1	20.0-	30.0	7.40	0.37	142.02	7.40	0.37	142.02				
2	30.0-	40.0	9.28	0.46	177.48	9.28	0.46	177.48				
3	40.0-	50.0	7.87	0.39	151.20	7.87	0.39	151.20				
4	50.0-	60.0	7.83	0.39	151.92	7.83	0.39	151.92				
5	60.0-	70.0	4.83	0.24	94.50	4.83	0.24	94.50				
6	70.0-	80.0	3.94	0.20	83.16	3.94	0.20	83.16				
7	80.0-	90.0	0.25	0.01	8.15	0.25	0.01	8.15				
8	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00				
9	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00				
10	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00				
11	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00				
12	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00				
13	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00				
14	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00				
15	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00				
		TOTAL	41.39	2.07	808.43	41.39	2.07	808.43				

WRUID RCH 7	Gauge GAGE 11	Coe OMAHA	State SD	County Hugh	Town MISS	Subasn SUBB	Cong CONG1	Chnty FLDIST	Levee LEVEE	Channel CHANNEL	Resvr OAME	
CORN												
Zone	Elevation	Without Project Conditions Damage (\$1000)				With Project Conditions Other Loss (\$1000)				With Project Conditions Damage (\$1000)		
1	20.0-	30.0	20.11	1.01	284.04	20.11	1.01	284.04	20.11	1.01	284.04	
2	30.0-	40.0	25.33	1.27	354.96	25.33	1.27	354.96	25.33	1.27	354.96	
3	40.0-	50.0	21.44	1.07	302.40	21.44	1.07	302.40	21.44	1.07	302.40	
4	50.0-	60.0	21.23	1.06	303.84	21.23	1.06	303.84	21.23	1.06	303.84	
5	60.0-	70.0	13.01	0.65	189.00	13.01	0.65	189.00	13.01	0.65	189.00	
6	70.0-	80.0	9.88	0.49	166.32	9.88	0.49	166.32	9.88	0.49	166.32	
7	80.0-	90.0	0.17	0.01	16.31	0.17	0.01	16.31	0.17	0.01	16.31	
8	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
9	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
12	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
13	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
14	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
TOTAL			111.16	5.56	1616.87	111.16	5.56	1616.87	111.16	5.56	1616.87	

MRUID RCH 7	Gauge GAGE 11	COE OMAHA	STATE SD	COUNTY HUGH	TOWN MISS	WATSHD SUBBN	CONG CONG1	CHNTY FLDIST	LEVEE CHANNEL	CHANL OAH	RESVR OAH
OATS											
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS				WITH PROJECT CONDITIONS					
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)			
1	20.0-	30.0	2.56	0.13		110.46	2.56	0.13		110.46	
2	30.0-	40.0	3.21	0.16		138.04	3.21	0.16		138.04	
3	40.0-	50.0	2.71	0.14		117.60	2.71	0.14		117.60	
4	50.0-	60.0	2.68	0.13		118.16	2.68	0.13		118.16	
5	60.0-	70.0	1.64	0.08		73.50	1.64	0.08		73.50	
6	70.0-	80.0	1.27	0.06		64.68	1.27	0.06		64.68	
7	80.0-	90.0	0.06	0.00		6.34	0.06	0.00		6.34	
8	90.0-	100.0	0.00	0.00		0.00	0.00	0.00		0.00	
9	100.0-	110.0	0.00	0.00		0.00	0.00	0.00		0.00	
10	110.0-	120.0	0.00	0.00		0.00	0.00	0.00		0.00	
11	120.0-	130.0	0.00	0.00		0.00	0.00	0.00		0.00	
12	130.0-	140.0	0.00	0.00		0.00	0.00	0.00		0.00	
13	140.0-	150.0	0.00	0.00		0.00	0.00	0.00		0.00	
14	150.0-	160.0	0.00	0.00		0.00	0.00	0.00		0.00	
15	160.0-	170.0	0.00	0.00		0.00	0.00	0.00		0.00	
TOTAL			14.12	0.71		628.78	14.12	0.71		628.78	

WTRUID RCH 7	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY HUGH	TOWN MISS	WATSHD SUBASN	SUBB CONG1	CNTY FLDIST	LEVEE	CHAN'.	RESVR NAME	
SORGHUM												
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE OTHER LOSS (\$1000)		
1	20.0-	30.0	0.69	0.03	78.90	0.69	0.03	0.04	0.04	78.90	0.03	
2	30.0-	40.0	0.87	0.04	98.60	0.87	0.04	0.04	0.04	98.60	0.04	
3	40.0-	50.0	0.73	0.04	84.00	0.73	0.04	0.04	0.04	84.00	0.04	
4	50.0-	60.0	0.71	0.04	84.40	0.71	0.04	0.04	0.04	84.40	0.04	
5	60.0-	70.0	0.43	0.02	52.50	0.43	0.02	0.02	0.02	52.50	0.02	
6	70.0-	80.0	0.30	0.01	46.20	0.30	0.01	0.01	0.01	46.20	0.01	
7	80.0-	90.0	0.00	0.00	4.53	0.00	0.00	0.00	0.00	4.53	0.00	
8	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
9	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
12	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
13	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
14	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
TOTAL			3.73		0.19	449.73	3.73	0.18	0.18	449.73		

WTRID RCH 7	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN SUBB	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR QAH
----------------	------------------	--------------	-------------	----------------	------	----------------	----------------	---------------	-------	--------	-------	---------	--------------

AREA FLOODED													FLOOD DAMAGE		
AGRICULTURAL DAMAGE CATEGORIES	WITHOUT PROJECT (ACRES)		WITH PROJECT (ACRES)		AREA MODIFIED (ACRES)		WITHOUT PROJECT (\$1000)		WITH PROJECT (\$1000)		DAMAGE REDUCED (\$1000)				
	SPRING WHEAT	808.43	CORN	1616.87	OATS	628.78	SORGHUM	449.13	OTHER LOSSES	TOTAL	3503.21	0.00	178.92	0.00	
STRUCTURES FLOODED													FLOOD DAMAGE		
URBAN DAMAGE CATEGORIES	WITHOUT PROJECT		WITH PROJECT		STRUCTURES MODIFIED		WITHOUT PROJECT (\$1000)		WITH PROJECT (\$1000)		DAMAGE REDUCED (\$1000)				
	TOTAL	0.00					0.00		0.00		0.00				
WATER RESOURCE UNIT TOTALS													PROJECT ACCOMPLISHMENTS		
DAMAGE (\$1000)													178.92	0.00	
STRUCTURES FLOODED													0.00	0.00	
PEOPLE FLOODED													0.00	0.00	
AREA FLOODED (ACRES)													3503.21	0.00	

WRUID RCH 8	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY STAN	TOWN MISS	WATSHD SUBASN	SUBBN SUBB	CONG CONG1	CMNTY FLDIST	LEVEE	CHANNEL	RESVR DAHE	
SPRING WHEAT													
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS						WITH PROJECT CONDITIONS					
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)						
1	30.0-	40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	40.0-	50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3	50.0-	60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4	60.0-	70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	70.0-	80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
6	80.0-	90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
7	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
8	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
9	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
12	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
13	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
14		160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
		TOTAL		0.00		0.00		0.00		0.00		0.00	

WRUID RCH 8	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY STAN	TOWN MISS	WATSHD SUBASN	SUBB	CONG CONG1	CNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHE
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE OTHER LOSS (\$1000)			
OATS													
1	30.0-	40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	40.0-	50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3	50.0-	60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4	60.0-	70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	70.0-	80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6	80.0-	90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
14	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	TOTAL		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

WRUID RCH 8	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY STAN	TOWN	WATSHD MISS	SUBASN SUBB	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHÉ
SORGHUM													
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS				WITH PROJECT CONDITIONS							
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	
1	30.0-	40.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
2	40.0-	50.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
3	50.0-	60.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
4	60.0-	70.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
5	70.0-	80.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
6	80.0-	90.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
7	90.0-	100.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
8	100.0-	110.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
9	110.0-	120.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
10	120.0-	130.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
11	130.0-	140.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
12	140.0-	150.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
13	150.0-	160.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
14	160.0-	170.0	0.00	0.00		0.00	0.00	0.00		0.00	0.00	0.00	0.00
					TOTAL	0.00	0.00	0.00		0.00	0.00	0.00	0.00

WRUID RCH 8	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY STAN	TOWN MISS	WATSHD SUBASN	SUBN CONG1	CONG CONG1	CMNTY FLDIST	LEVEE CHANNEL	RESVR OAHE
AREA FLOODED											

WRUID	GAUGE RCH 9	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY STAN	TOWN MISS	WATSHD SUBASN LBRU	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHE		
SPRING WHEAT															
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS				WITH PROJECT CONDITIONS				DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)						
1	20.0-	30.0	9.60	0.48	184.15	9.60	0.48	184.15	0.48						
2	30.0-	40.0	16.60	0.83	317.55	16.60	0.83	317.55	0.83						
3	40.0-	50.0	8.31	0.42	159.79	8.31	0.42	159.79	0.42						
4	50.0-	60.0	8.10	0.41	157.18	8.10	0.41	157.18	0.41						
5	60.0-	70.0	6.68	0.33	130.79	6.68	0.33	130.79	0.33						
6	70.0-	80.0	1.29	0.06	27.26	1.29	0.06	27.26	1.29						
7	80.0-	90.0	0.02	0.00	0.52	0.02	0.00	0.52	0.02						
8	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
9	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
10	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
11	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
12	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
13	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
14	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
15	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
TOTAL			50.60		2.53		2.53	877.24		50.60		2.53		877.24	

WRUID RCH 9	Gauge GAGE 11	COE OMAHA	STATE SD	COUNTY STAN	TOWN WATSHD	SUBASN LBRU	CONG CONG1	CHNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHE	
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE OTHER LOSS (\$1000)				FLOODED AREA FLOODED (ACRES)			
ZONE	ELEVATION												
ZONE	ELEVATION									DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	
1	20.0-	30.0	3.09	0.15	133.35	3.09	0.15	133.35	0.15	0.15	0.27	0.15	133.35
2	30.0-	40.0	5.34	0.27	229.95	5.34	0.27	229.95	0.27	0.27	0.13	0.13	229.95
3	40.0-	50.0	2.66	0.13	115.71	2.66	0.13	115.71	0.13	0.13	0.13	0.13	115.71
4	50.0-	60.0	2.58	0.13	113.82	2.58	0.13	113.82	0.13	0.13	0.13	0.13	113.82
5	60.0-	70.0	2.11	0.11	94.71	2.11	0.11	94.71	0.11	0.11	0.11	0.11	94.71
6	70.0-	80.0	0.39	0.02	19.74	0.39	0.02	19.74	0.02	0.02	0.02	0.02	19.74
7	80.0-	90.0	0.00	0.00	0.38	0.00	0.00	0.38	0.00	0.00	0.00	0.00	0.38
8	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
14	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
TOTAL			16.17	0.81	707.66	16.17	0.81	707.66	0.81	0.81	0.81	0.81	707.66

WFLUID RCH 9	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY STAN	TOWN	WATSHD MISS	SUBASN LBRU	CONG CONG1	CNTY	FLDIST	LEVEE	CHANNEL	RESVR OAME
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS						WITH PROJECT CONDITIONS					
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)					
1	20.0-	30.0	2.76	0.14		317.50	2.76	0.14					317.50
2	30.0-	40.0	4.81	0.24		547.50	4.81	0.24					547.50
3	40.0-	50.0	2.39	0.12		275.50	2.39	0.12					275.50
4	50.0-	60.0	2.29	0.11		271.00	2.29	0.11					271.00
5	60.0-	70.0	1.86	0.09		225.50	1.86	0.09					225.50
6	70.0-	80.0	0.30	0.02		47.00	0.30	0.02					47.00
7	80.0-	90.0	0.00	0.00		0.90	0.00	0.00					0.90
8	90.0-	100.0	0.00	0.00		0.00	0.00	0.00					0.00
9	100.0-	110.0	0.00	0.00		0.00	0.00	0.00					0.00
10	110.0-	120.0	0.00	0.00		0.00	0.00	0.00					0.00
11	120.0-	130.0	0.00	0.00		0.00	0.00	0.00					0.00
12	130.0-	140.0	0.00	0.00		0.00	0.00	0.00					0.00
13	140.0-	150.0	0.00	0.00		0.00	0.00	0.00					0.00
14	150.0-	160.0	0.00	0.00		0.00	0.00	0.00					0.00
15	160.0-	170.0	0.00	0.00		0.00	0.00	0.00					0.00
					TOTAL	14.41	0.72	1684.90	14.41	0.72			1684.90

WRUID RCH 9	GUAGE GAGE 11	COE OMAHA	STATE SD	COUNTY STAN	TOWN	WATSHD MISS	SUBASN LBRU	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHE
----------------	------------------	--------------	-------------	----------------	------	----------------	----------------	---------------	-------	--------	-------	---------	---------------

FLOOD DAMAGE												
AREA FLOODED												
WITHOUT PROJECT (ACRES)		WITH PROJECT (ACRES)		MODIFIED (ACRES)		WITHOUT PROJECT (\\$1000)		WITH PROJECT (\\$1000)		DAMAGE REDUCED (\\$1000)		
AGRICULTURAL DAMAGE CATEGORIES												
SPRING WHEAT	977.24	977.24	0.00	50.60	50.60	0.00	0.00	16.17	16.17	0.00	0.00	
OATS	707.66	707.66	0.00	14.41	14.41	0.00	0.00	4.06	4.06	0.00	0.00	
SORGHUM	1684.90	1684.90	0.00	4.06	4.06	0.00	0.00	0.00	0.00	0.00	0.00	
OTHER LOSSES												
TOTAL	3369.80	3369.80	0.00	85.25	85.25	0.00	0.00	0.00	0.00	0.00	0.00	

STRUCTURES FLOODED												
WITHOUT PROJECT		WITH PROJECT		STRUCTURES MODIFIED		WITHOUT PROJECT (\\$1000)		WITH PROJECT (\\$1000)		DAMAGE REDUCED (\\$1000)		
URBAN DAMAGE CATEGORIES												
TOTAL	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

WATER RESOURCE UNIT TOTALS												
DAMAGE (\\$1000)		WITHOUT PROJECT CONDITIONS		WITH PROJECT CONDITIONS		PROJECT ACCOMPLISHMENTS						
STRUCTURES FLOODED		85.25		85.25		0.00	0.00	0.00	0.00	0.00	0.00	
PEOPLE FLOODED		0.00		0.00		0.00	0.00	0.00	0.00	0.00	0.00	
AREA FLOODED (ACRES)		3369.80		3369.80		3369.80		3369.80		3369.80		

WTRJD RCH10	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN CROW	CONG CONG1	CNTY	FLDIST	LEVEE	CHANNEL	RESRV NAME
----------------	------------------	--------------	-------------	----------------	------	----------------	----------------	---------------	------	--------	-------	---------	---------------

ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS		WITH PROJECT CONDITIONS		TOTAL
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	AREA FLOODED (ACRES)	
1	10.0-	20.0	7.73	0.39	148.68	7.73
2	20.0-	30.0	14.42	0.72	276.66	14.42
3	30.0-	40.0	15.97	0.80	305.46	15.97
4	40.0-	50.0	14.07	0.70	270.54	14.07
5	50.0-	60.0	18.43	0.92	357.66	18.43
6	60.0-	70.0	12.17	0.61	238.32	12.17
7	70.0-	80.0	10.60	0.53	223.56	10.60
8	80.0-	90.0	2.13	0.11	70.31	2.13
9	90.0-	100.0	0.00	0.00	0.00	0.00
10	100.0-	110.0	0.00	0.00	0.00	0.00
11	110.0-	120.0	0.00	0.00	0.00	0.00
12	120.0-	130.0	0.00	0.00	0.00	0.00
13	130.0-	140.0	0.00	0.00	0.00	0.00
14	140.0-	150.0	0.00	0.00	0.00	0.00
15	150.0-	160.0	0.00	0.00	0.00	0.00
16	160.0-	170.0	0.00	0.00	0.00	0.00
					4.78	95.52
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						305.46
						270.54
						238.32
						223.56
						70.31
						1891.18
						148.68
						276.66
						30

WRUID RCH10	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY HUGH	TOWN	WATSHD MISS	SUBASN CROW	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR DAHE
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS				WITH PROJECT CONDITIONS							
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)
1	10.0-	20.0	20.89	1.04	297.36	20.89	20.89	1.04	1.04	297.36	1.04	1.04	297.36
2	20.0-	30.0	39.18	1.96	553.32	39.18	39.18	1.96	1.96	553.32	1.96	1.96	553.32
3	30.0-	40.0	43.59	2.18	610.92	43.59	43.59	2.18	2.18	610.92	2.18	2.18	610.92
4	40.0-	50.0	38.36	1.92	541.08	38.36	38.36	1.92	1.92	541.08	1.92	1.92	541.08
5	50.0-	60.0	49.98	2.50	715.32	49.98	49.98	2.50	2.50	715.32	2.50	2.50	715.32
6	60.0-	70.0	32.80	1.64	476.64	32.80	32.80	1.64	1.64	476.64	1.64	1.64	476.64
7	70.0-	80.0	26.55	1.33	447.12	26.55	26.55	1.33	1.33	447.12	1.33	1.33	447.12
8	80.0-	90.0	1.50	0.07	140.62	1.50	1.50	0.07	0.07	140.62	0.07	0.07	140.62
9	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
14	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
16	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
					252.85	12.64	3782.38	12.64	252.85	12.64	3782.38	12.64	3782.38
					TOTAL								

WRUID RCH10	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY HUGH	TOWN WATSHD	SUBASN MISS	CONG CROW	CONG1	CNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHE	
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE OTHER LOSS (\$1000)				AREA FLOODED (\$1000)				(ACRES)
1	10.0-	20.0	0.71	0.04	82.60	0.71	0.04	82.60	0.04	0.04	0.04	0.04	82.60	
2	20.0-	30.0	1.34	0.07	153.70	1.34	0.07	153.70	0.07	0.07	0.07	0.07	153.70	
3	30.0-	40.0	1.49	0.07	169.70	1.49	0.07	169.70	0.07	0.07	0.07	0.07	169.70	
4	40.0-	50.0	1.30	0.07	150.30	1.30	0.07	150.30	0.07	0.07	0.07	0.07	150.30	
5	50.0-	60.0	1.68	0.08	198.70	1.68	0.08	198.70	0.08	0.08	0.08	0.08	198.70	
6	60.0-	70.0	1.09	0.05	132.40	1.09	0.05	132.40	0.05	0.05	0.05	0.05	132.40	
7	70.0-	80.0	0.80	0.04	124.20	0.80	0.04	124.20	0.04	0.04	0.04	0.04	124.20	
8	80.0-	90.0	0.04	0.00	39.06	0.04	0.00	39.06	0.04	0.00	0.00	0.00	39.06	
9	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
12	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
13	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
14	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
16	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
TOTAL			8.45	0.42	1050.66		8.45		0.42	0.42	0.42	0.42	1050.66	

WTRID	GAUGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASN	CONG	CMNTY	FLDIST	LEVEE	CHANNEL	RESRV QAHE
RCH10	GAGE 11	OMAHA	SD	HUGH		MISS	CROW	CONG1					

AREA FLOODED		FLOOD DAMAGE		FLOOD DAMAGE	
AGRICULTURAL DAMAGE CATEGORIES	WITHOUT PROJECT (ACRES)	WITH PROJECT (ACRES)	AREA MODIFIED (ACRES)	WITHOUT PROJECT (\$1000)	WITH PROJECT (\$1000)
SPRING WHEAT	1891.19	1891.19	0.00	95.52	95.52
CORN	3782.38	3782.38	0.00	252.85	252.85
OATS	1470.92	1470.92	0.00	32.40	32.40
SORGHUM	1050.66	1050.66	0.00	8.45	8.45
OTHER LOSSES				19.46	19.46
TOTAL	8195.15	8195.15	0.00	408.68	408.68

STRUCTURES FLOODED		FLOOD DAMAGE		FLOOD DAMAGE	
URBAN DAMAGE CATEGORIES	WITHOUT PROJECT	WITH PROJECT	STRUCTURES MODIFIED	WITHOUT PROJECT (\$1000)	WITH PROJECT (\$1000)
				0.00	0.00
TOTAL	0.30	0.00	0.00	0.00	0.00

WATER RESOURCE UNIT TOTALS		WITHOUT PROJECT CONDITIONS		WITH PROJECT CONDITIONS		PROJECT ACCOMPLISHMENTS	
DAMAGE (\$1000)	STRUCTURES FLOODED	PEOPLE FLOODED	AREA FLOODED (ACRES)	408.68	0.00	0.00	0.00
	0.00	0.00	0.00	0.00	0.00	0.00	0.00
TOTAL	0.00	0.00	8195.15	408.68	0.00	0.00	0.00

WRUID RCH11	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY LYNN	TOWN	WATSHD MISS	SUBASN LBRU	CONG CONG1	CHNTY	FLDIST	LEVEE	CHANNEL	RESVR QAHF
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE OTHER LOSS (\$1000) (\$1000)				WITH PROJECT CONDITIONS DAMAGE OTHER LOSS (\$1000) (\$1000)				AREA FLOODED (ACRES)			
1	0.0-	10.0	5.87	0.29	84.16	5.87	0.29	84.16					
2	10.0-	20.0	29.88	1.49	425.28	29.88	1.49	425.28					
3	20.0-	30.0	31.35	1.57	442.72	31.35	1.57	442.72					
4	30.0-	40.0	18.11	0.91	253.76	18.11	0.91	253.76					
5	40.0-	50.0	13.75	0.69	193.92	13.75	0.69	193.92					
6	50.0-	60.0	10.88	0.54	155.68	10.88	0.54	155.68					
7	60.0-	70.0	10.25	0.51	148.96	10.25	0.51	148.96					
8	70.0-	80.0	10.50	0.52	176.80	10.50	0.52	176.80					
9	80.0-	90.0	0.87	0.04	81.31	0.87	0.04	81.31					
10	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00					
11	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00					
12	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00					
13	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00					
14	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00					
15	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00					
16	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00					
17	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00					
					131.45	6.57	1962.59	131.45					
													6.57
													1962.59

OATS		WITHOUT PROJECT CONDITIONS						WITH PROJECT CONDITIONS						
ZONE	ELEVATION	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	CHNTY	FLDIST	LEVEE	CHANNEL	RESRV QAHE		
1	0.0-	10.0	2.06	0.10	89.42	2.06	0.10	0.10					89.42	
2	10.0-	20.0	10.43	0.52	451.86	10.43	0.52	0.52					451.86	
3	20.0-	30.0	10.90	0.54	470.39	10.90	0.54	0.54					470.39	
4	30.0-	40.0	6.26	0.31	289.62	6.26	0.31	0.31					269.62	
5	40.0-	50.0	4.74	0.24	206.04	4.74	0.24	0.24					206.04	
6	50.0-	60.0	3.75	0.19	185.41	3.75	0.19	0.19					185.41	
7	60.0-	70.0	3.53	0.18	158.27	3.53	0.18	0.18					158.27	
8	70.0-	80.0	3.67	0.18	187.85	3.67	0.18	0.18					187.85	
9	80.0-	90.0	0.87	0.04	86.39	0.87	0.04	0.04					86.39	
10	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00					0.00	
11	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00					0.00	
12	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00					0.00	
13	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00					0.00	
14	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00					0.00	
15	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00					0.00	
16	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00					0.00	
17	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00					0.00	
TOTAL													46.21	2.31
													46.21	2.31
													46.21	2.31

WRUID RCH11	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY LYNN	TOWN MISS	WATSHD SUBASN	CONG LBRU	CONG1	CNTY FLDIST	LEVEE CHANNEL	RESVR DAHE	
SORGHUM												
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)		
1	0.0-	10.0	3.01	0.15	352.42	3.01	0.15	352.42	3.01	0.15	352.42	
2	10.0-	20.0	15.36	0.77	1780.86	15.36	0.77	1780.86	15.36	0.77	1780.86	
3	20.0-	30.0	16.13	0.81	1853.89	16.13	0.81	1853.89	16.13	0.81	1853.89	
4	30.0-	40.0	9.33	0.47	1062.62	9.33	0.47	1062.62	9.33	0.47	1062.62	
5	40.0-	50.0	7.04	0.35	812.04	7.04	0.35	812.04	7.04	0.35	812.04	
6	50.0-	60.0	5.52	0.28	651.91	5.52	0.28	651.91	5.52	0.28	651.91	
7	60.0-	70.0	5.14	0.26	623.77	5.14	0.26	623.77	5.14	0.26	623.77	
8	70.0-	80.0	4.74	0.24	740.35	4.74	0.24	740.35	4.74	0.24	740.35	
9	80.0-	90.0	0.34	0.02	340.49	0.34	0.02	340.49	0.34	0.02	340.49	
10	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
12	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
13	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
14	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
16	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
17	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
TOTAL			66.61	3.33	8218.35	66.61	3.33	8218.35	66.61	3.33	8218.35	

WRUID RCH11	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY LYNN	TOWN	WATSHD MISS	SUBASN LBRU	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHE
AREA FLOODED													
AGRICULTURAL DAMAGE CATEGORIES													
CORN OATS SORGHUM													
1962.59 2085.25 8218.35													
1962.59 2085.25 8218.35													
0.00 0.00 0.00													
0.00 46.21 66.61													
131.45 46.21 66.61													
131.45 46.21 66.61													
OTHER LOSSES													
TOTAL													
12266.20 *****													
0.00 *****													
FLOOD DAMAGE													
STRUCTURES FLOODED													
URBAN DAMAGE CATEGORIES													
TOTAL													
0.00 *****													
FLOOD DAMAGE													
WATER RESOURCE UNIT TOTALS													
DAMAGE (\$1000)													
STRUCTURES FLOODED PEOPLE FLOODED AREA FLOODED (ACRES)													
0.00 0.00 12266.20													
PROJECT ACCOMPLISHMENTS													
256.49 0.00 0.00													
256.49 0.00 0.00													
0.00 0.00 0.00													
12266.20 *****													
0.00 *****													

WRIID RCH12	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY HYDE	TOWN MISS	WATSHD SUBASN CROW	CONG CONG1	CMNTY FLDIST	LEVEE	CHANNEL	RESVR OAHE	
SPRING WHEAT												
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS				WITH PROJECT CONDITIONS						
		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	(\$1000)	DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)	(\$1000)			
1	10.0-	20.0	0.21	0.01	4.06	0.21	0.01	4.06	0.01	4.06		
2	20.0-	30.0	0.48	0.02	9.28	0.48	0.02	9.28	0.02	9.28		
3	30.0-	40.0	0.24	0.01	4.64	0.24	0.01	4.64	0.01	4.64		
4	40.0-	50.0	0.23	0.01	4.35	0.23	0.01	4.35	0.01	4.35		
5	50.0-	60.0	0.31	0.02	6.09	0.31	0.02	6.09	0.02	6.09		
6	60.0-	70.0	0.76	0.04	14.79	0.76	0.04	14.79	0.04	14.79		
7	70.0-	80.0	0.81	0.04	17.11	0.81	0.04	17.11	0.04	17.11		
8	80.0-	90.0	0.12	0.01	4.09	0.12	0.01	4.09	0.01	4.09		
9	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
10	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
11	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
12	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
13	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
14	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
15	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
16	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
					3.17	0.16	64.41	3.17	0.16	64.41		

WRIUID RCH12	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY HYDE	TOWN MISS	WATSHD SUBASN	SUBASN CROW	CONG CONG1	CNTY FLDIST	LEVEE	CHANNEL	RESVR DAHE
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS OTHER LOSS (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)		
ZONE	ELEVATION											
1	10.0-	20.0	0.12	0.01	5.04	0.12	0.01	0.01	0.01	0.01	0.01	5.04
2	20.0-	30.0	0.27	0.01	11.52	0.27	0.01	0.01	0.01	0.01	0.01	11.52
3	30.0-	40.0	0.13	0.01	5.76	0.13	0.01	0.01	0.01	0.01	0.01	5.76
4	40.0-	50.0	0.12	0.01	5.40	0.12	0.01	0.01	0.01	0.01	0.01	5.40
5	50.0-	60.0	0.17	0.01	7.56	0.17	0.01	0.01	0.01	0.01	0.01	7.56
6	60.0-	70.0	0.41	0.02	18.36	0.41	0.02	0.02	0.02	0.02	0.02	18.36
7	70.0-	80.0	0.42	0.02	21.24	0.42	0.02	0.02	0.02	0.02	0.02	21.24
8	80.0-	90.0	0.05	0.00	5.08	0.05	0.00	0.00	0.00	0.00	0.00	5.08
9	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
14	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
16	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	TOTAL				1.63	0.08	79.98	1.89	0.08	79.98	1.89	

MRUID RCH12	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY HYDE	TOWN MISS	WATSHD SUBASN	SUBASN CROW	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR QAHE	
SORGHUM														
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)			PROJECT CONDITIONS OTHER LOSS (\$1000)			WITH PROJECT CONDITIONS DAMAGE (\$1000)			OTHER LOSS (\$1000)			AREA FLOODED (ACRES)
1	10.0-	20.0	0.02	0.00	0.00	0.00	0.00	2.38	0.02	0.00	0.00	0.00	0.00	2.38
2	20.0-	30.0	0.05	0.00	0.00	0.00	0.00	5.44	0.05	0.00	0.00	0.00	0.00	5.44
3	30.0-	40.0	0.02	0.00	0.00	0.00	0.00	2.72	0.02	0.00	0.00	0.00	0.00	2.72
4	40.0-	50.0	0.02	0.00	0.00	0.00	0.00	2.55	0.02	0.00	0.00	0.00	0.00	2.55
5	50.0-	60.0	0.03	0.00	0.00	0.00	0.00	3.57	0.03	0.00	0.00	0.00	0.00	3.57
6	60.0-	70.0	0.07	0.00	0.00	0.00	0.00	8.67	0.07	0.00	0.00	0.00	0.00	8.67
7	70.0-	80.0	0.06	0.00	0.00	0.00	0.00	10.03	0.06	0.00	0.00	0.00	0.00	10.03
8	80.0-	90.0	0.00	0.00	0.00	0.00	0.00	2.40	0.00	0.00	0.00	0.00	0.00	2.40
9	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
14	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
16	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	TOTAL		0.28		0.01		0.01	37.76	0.28		0.01			37.76

WRUID RCH12	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY HYDE	TOWN	WATSHD MISS	SUBASN CROW	CONG CONG1	CMNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHE	
AREA FLOODED														
WITHOUT PROJECT (ACRES)														
WITH PROJECT (ACRES)														
AGRICULTURAL DAMAGE CATEGORIES														
SPRING WHEAT														
OATS	64.41	64.41				0.00		3.17	3.17		0.00			
SORGHUM	79.96	79.96				0.00		1.69	1.69		0.00			
OTHER LOSSES	37.76	37.76				0.00		0.28	0.28		0.00			
TOTAL	182.12	182.12				0.00		5.39	5.39		0.00			
FLOOD DAMAGE														
WITHOUT PROJECT (\$1000)														
WITH PROJECT (\$1000)														
STRUCTURES FLOODED														
WITHOUT PROJECT (ACRES)														
WITH PROJECT (ACRES)														
URBAN DAMAGE CATEGORIES														
TOTAL	0.00	0.00						0.00	0.00		0.00			
FLOOD DAMAGE														
WITHOUT PROJECT (\$1000)														
WITH PROJECT (\$1000)														
WATER RESOURCE UNIT TOTALS														
WITHOUT PROJECT CONDITIONS														
WITH PROJECT CONDITIONS														
DAMAGE (\$1000)						5.39			5.39		0.00			
STRUCTURES FLOODED						0.00		0.00	0.00		0.00			
PEOPLE FLOODED						0.00		0.00	0.00		0.00			
AREA FLOODED (ACRES)						182.12		182.12	182.12		0.00			
PROJECT ACCOMPLISHMENTS														

WRIUID RCH13	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY BUFF	TOWN MISS	WATSHD SUBASN CROW	CONG CONG1	CNTY FLDST	LEVEE CHANNEL	RESVR NAME
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)			PROJECT CONDITIONS OTHER LOSS (\$1000)			WITH PROJECT CONDITIONS DAMAGE (\$1000)		
1	0.0-	10.0	1.32	0.07	25.48	1.32	0.07	25.48	0.07	25.48
2	10.0-	20.0	0.15	0.01	2.80	0.15	0.01	2.80	0.01	2.80
3	20.0-	30.0	0.87	0.04	16.66	0.87	0.04	16.66	0.04	16.66
4	30.0-	40.0	2.02	0.10	38.64	2.02	0.10	38.64	0.10	38.64
5	40.0-	50.0	5.48	0.27	105.42	5.48	0.27	105.42	0.27	105.42
6	50.0-	60.0	10.78	0.54	209.6	10.78	0.54	209.6	0.54	209.6
7	60.0-	70.0	15.89	0.79	311.22	15.89	0.79	311.22	0.79	311.22
8	70.0-	80.0	8.31	0.42	175.28	8.31	0.42	175.28	0.42	175.28
9	80.0-	90.0	0.74	0.04	24.36	0.74	0.04	24.36	0.04	24.36
10	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
14	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
16	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
17	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
					45.56	2.28	45.56	2.28	45.56	2.28
					TOTAL	909.02	909.02	909.02	909.02	909.02

WRUID RCH13	GAUGE GAGE 11	COE OMAHA	STATE SD	COUNTY BUFF	TOWN MISS	WATSHD SUBASN	SUBASN CROW	CONG CONG1	CHNTY FLDIST	LEVEE	CHANNEL	RESVR QAHE	
CORN													
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS DAMAGE (\$1000)				WITH PROJECT CONDITIONS OTHER LOSS (\$1000)			
1	0.0-	10.0	4.95	0.25	70.98	4.95	0.25	0.25	0.25	70.98	7.80	7.80	46.41
2	10.0-	20.0	0.55	0.03	7.80	0.55	0.03	0.03	0.03	7.80	0.38	0.38	107.64
3	20.0-	30.0	3.29	0.16	46.41	3.29	0.16	0.16	0.16	46.41	1.04	1.04	293.67
4	30.0-	40.0	7.68	0.38	107.64	7.68	0.38	0.38	0.38	107.64	2.04	2.04	582.66
5	40.0-	50.0	20.82	1.04	293.67	20.82	1.04	1.04	1.04	293.67	2.04	2.04	866.97
6	50.0-	60.0	40.71	2.04	582.66	40.71	2.04	2.04	2.04	582.66	2.98	2.98	486.28
7	60.0-	70.0	59.66	2.98	866.97	59.66	2.98	2.98	2.98	866.97	1.45	1.45	67.86
8	70.0-	80.0	29.00	1.45	486.28	29.00	1.45	1.45	1.45	486.28	0.00	0.00	0.00
9	80.0-	90.0	0.72	0.04	67.86	0.72	0.04	0.04	0.04	67.86	0.00	0.00	0.00
10	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
13	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
14	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
16	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
17	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
TOTAL					187.37		8.37		187.37		8.37		2532.27
													2532.27

WRUID	GAUGE	COE	STATE	COUNTY	TOWN	WATSHD	SUBASN	CONG	CNTY	FLDIST	LEVEE	CHANNEL	RESVR	DAHE	
RCH13	GAGE 11	OMAHA	SD	BUFF	MISS	CROW	CONG1								
OATS															
ZONE	ELEVATION				WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)		DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)		WITH PROJECT CONDITIONS DAMAGE (\$1000)	OTHER LOSS (\$1000)	AREA FLOODED (ACRES)
1	0.0-	10.0	0.50	0.03	21.84				0.50	0.50			0.03	21.84	
2	10.0-	20.0	0.06	0.00					2.40	0.06			0.00	2.40	
3	20.0-	30.0	0.33	0.02					14.28	0.33			0.02	14.28	
4	30.0-	40.0	0.77	0.04					33.12	0.77			0.04	33.12	
5	40.0-	50.0	2.08	0.10					90.36	2.08			0.10	90.36	
6	50.0-	60.0	4.06	0.20					179.28	4.06			0.20	179.28	
7	60.0-	70.0	5.94	0.30					266.76	5.94			0.30	266.76	
8	70.0-	80.0	2.94	0.15					150.24	2.94			0.15	150.24	
9	80.0-	90.0	0.21	0.01					20.88	0.21			0.01	20.88	
10	90.0-	100.0	0.00	0.00					0.00	0.00			0.00	0.00	
11	100.0-	110.0	0.00	0.00					0.00	0.00			0.00	0.00	
12	110.0-	120.0	0.00	0.00					0.00	0.00			0.00	0.00	
13	120.0-	130.0	0.00	0.00					0.00	0.00			0.00	0.00	
14	130.0-	140.0	0.00	0.00					0.00	0.00			0.00	0.00	
15	140.0-	150.0	0.00	0.00					0.00	0.00			0.00	0.00	
16	150.0-	160.0	0.00	0.00					0.00	0.00			0.00	0.00	
17	160.0-	170.0	0.00	0.00					0.00	0.00			0.00	0.00	
		TOTAL			16.89				0.84				0.84		779.16

WRIUID RCH13	Gauge GAGE 11	COE OMAHA	STATE SD	COUNTY BUFF	TOWN MISS	WATSHD SUBASN	CONG CROW	CONG CONG1	CLNTY	FLDIST	LEVEE	CHANNEL	RESVR OAHE	
SORGHUM														
ZONE	ELEVATION	WITHOUT PROJECT CONDITIONS				WITH PROJECT CONDITIONS				WITH PROJECT CONDITIONS				
		DAMAGE (\$1000)				DAMAGE (\$1000)				DAMAGE (\$1000)				
1	0.0-	10.0	0.39	0.02	45.50	0.39	0.02	0.02	45.50	0.02	0.00	0.00	45.50	
2	10.0-	20.0	0.04	0.00	5.00	0.04	0.00	0.00	5.00	0.00	0.00	0.00	5.00	
3	20.0-	30.0	0.26	0.01	29.75	0.26	0.01	0.01	29.75	0.01	0.03	0.03	29.75	
4	30.0-	40.0	0.61	0.03	69.00	0.61	0.03	0.03	69.00	0.03	0.08	0.08	69.00	
5	40.0-	50.0	1.63	0.08	188.25	1.63	0.08	0.08	188.25	0.08	0.16	0.16	188.25	
6	50.0-	60.0	3.16	0.16	373.50	3.16	0.16	0.16	373.50	0.16	0.23	0.23	373.50	
7	60.0-	70.0	4.58	0.23	555.75	4.58	0.23	0.23	555.75	0.23	0.30	0.30	555.75	
8	70.0-	80.0	2.00	0.10	313.00	2.00	0.10	0.10	313.00	0.10	0.10	0.10	313.00	
9	80.0-	90.0	0.04	0.00	43.50	0.04	0.00	0.00	43.50	0.04	0.00	0.00	43.50	
10	90.0-	100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11	100.0-	110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
12	110.0-	120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
13	120.0-	130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
14	130.0-	140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	140.0-	150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
16	150.0-	160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
17	160.0-	170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
TOTAL			12.72		0.64	1623.25		12.72		0.64	1623.25		0.64	1623.25

AGRICULTURAL DAMAGE CATEGORIES		AREA FLOODED		FLOOD DAMAGE	
	WITHOUT PROJECT (ACRES)	WITH PROJECT (ACRES)	AREA MODIFIED (ACRES)	WITHOUT PROJECT (\$1000)	WITH PROJECT (\$1000)
SPRING WHEAT	909.02	809.02	0.00	45.56	45.56
CORN	2532.27	2532.27	0.00	167.37	167.37
OATS	779.16	779.16	0.00	16.89	16.89
SORGHUM	1623.25	1623.25	0.00	12.72	12.72
OTHER LOSSES				12.13	12.13
TOTAL	5843.70	5843.70	0.00	254.67	254.67

STRUCTURES FLOODED		FLOOD DAMAGE	
	WITHOUT PROJECT	WITH PROJECT	STRUCTURES MODIFIED
URBAN DAMAGE CATEGORIES			
TOTAL	0.00	0.00	0.00

WATER RESOURCE UNIT TOTALS		WITHOUT PROJECT CONDITIONS	WITH PROJECT CONDITIONS	PROJECT ACCOMPLISHMENTS
DAMAGE (\$1000)	STRUCTURES FLOODED	0.00	254.67	0.00
PEOPLE FLOODED	0.00	0.00	0.00	0.00
AREA FLOODED (ACRES)	5843.70	5843.70	5843.70	5843.70

WATER RESOURCE UNIT SUMMARY
 BEGINNING DATE - 02JUN93
 URBAN PRICE INDEX - 1.00
 AG PRICE INDEX - 1.00

ENDING DATE - 10JUN93

LOOKBACK DATE - 02JUN93

WITHOUT PROJECT CONDITIONS

WITH PROJECT CONDITIONS

		WITH PROJECT CONDITIONS						PROJECT ACCOMPLISHMENTS								
		AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE	AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE	AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE
MISSOURI RIVER																
OPEN RIVER																
RCH 1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
RCH 2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
RCH 3	0.0	0.0	0.0	53924.5	467.8	0.0	0.0	53924.5	467.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0
RCH 4	0.0	0.0	0.0	8302.7	174.5	0.0	0.0	8302.7	174.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
RCH 6	7.8	404.6	0.0	0.0	0.0	0.0	7.8	404.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TOTAL	7.8	404.6	62227.2	642.1	0.0	7.8	404.6	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
LAKE SHARPE																
RCH 7	178.9	3603.2	0.0	0.0	0.0	0.0	178.9	3603.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
RCH 8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TOTAL	178.9	3603.2	0.0	0.0	0.0	0.0	178.9	3603.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
CWF RESERVATION																
RCH10	428.7	8166.1	0.0	0.0	0.0	0.0	428.7	8166.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
RCH12	5.4	102.1	0.0	0.0	0.0	0.0	5.4	102.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
RCH13	264.7	8643.7	0.0	0.0	0.0	0.0	264.7	8643.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TOTAL	688.7	14221.0	0.0	0.0	0.0	0.0	688.7	14221.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
LDP RESERVATION																
RCH 9	65.3	3369.8	0.0	0.0	0.0	0.0	65.3	3369.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
RCH11	255.6	12266.2	0.0	0.0	0.0	0.0	255.6	12266.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TOTAL	341.7	15636.0	0.0	0.0	0.0	0.0	341.7	15636.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TOTAL	1187.2	33764.8	62227.2	642.1	0.0	1187.2	33764.8	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TOTAL	1187.2	33764.8	62227.2	642.1	0.0	1187.2	33764.8	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CONGRESSIONAL DISTRICT SUMMARY

BEGINNING DATE : 02JUN93
URBAN PRICE INDEX : 1.00
ENDING DATE : 10JUN93
AG PRICE INDEX : 1.00
LOOKBACK DATE : 02JUN93

WITHOUT PROJECT CONDITIONS						WITH PROJECT CONDITIONS						PROJECT ACCOMPLISHMENTS					
	AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE		AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE		AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE
SOUTH DAKOTA																	
REP TIM JOHNSON	1197.2	\$3764.8	62227.2	642.1	0.0	1197.2	33764.8	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
SUB-TOTAL	1197.2	\$3764.8	62227.2	642.1	0.0	1197.2	33764.8	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
GRAND TOTAL	1197.2	\$3764.8	62227.2	642.1	0.0	1197.2	33764.8	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

COUNTY SUMMARY

BEGINNING DATE : 02JUN93
URBAN PRICE INDEX : 1.00
ENDING DATE : 10JUN93
AG PRICE INDEX : 1.00
LOOKBACK DATE : 02JUN93

WITHOUT PROJECT CONDITIONS						WITH PROJECT CONDITIONS						PROJECT ACCOMPLISHMENTS					
	AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE		AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE		AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE
SOUTH DAKOTA																	
HUGHES COUNTY	567.6	11698.4	62227.2	642.1	0.0	567.6	11698.4	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
STANLEY COUNTY	63.0	3774.5	0.0	0.0	0.0	63.0	3774.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
LYMAN COUNTY	256.5	12266.2	0.0	0.0	0.0	256.5	12266.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
HYDE COUNTY	5.4	182.1	0.0	0.0	0.0	5.4	182.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
BUFFALO COUNTY	254.7	5843.7	0.0	0.0	0.0	254.7	5843.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
SUB-TOTAL	1197.2	\$3764.8	62227.2	642.1	0.0	1197.2	33764.8	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
GRAND TOTAL	1197.2	\$3764.8	62227.2	642.1	0.0	1197.2	33764.8	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

RESERVOIR PROJECT SUMMARY

BEGINNING DATE : 02JUN93
URBAN PRICE INDEX : 1.00
ENDING DATE : 10JUN93
AG PRICE INDEX : 1.00
LOOKBACK DATE : 02JUN93

WITHOUT PROJECT CONDITIONS						WITH PROJECT CONDITIONS						PROJECT ACCOMPLISHMENTS					
	AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE		AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE		AGRI (\$1000)	AREA (ACRES)	URBAN (\$1000)	STRUCT	PEOPLE
MISSOURI RIVER																	
DAKE RESERVOIR	1197.2	\$3764.8	62227.2	642.1	0.0	1197.2	33764.8	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
SUB-TOTAL	1197.2	\$3764.8	62227.2	642.1	0.0	1197.2	33764.8	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
GRAND TOTAL	1197.2	\$3764.8	62227.2	642.1	0.0	1197.2	33764.8	62227.2	642.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

ANALYSIS SUMMARY			
DAMAGE CATEGORIES	WITHOUT PROJECT CONDITIONS DAMAGE (\$1000)	WITH PROJECT CONDITIONS DAMAGE (\$1000)	PROJECT DAMAGE REDUCTION (\$1000)
<u>AGRICULTURAL</u>			
SPRING WHEAT	241.26	241.26	0.00
CORN	662.83	662.83	0.00
OATS	128.92	128.92	0.00
SORGHUM	107.17	107.17	0.00
OTHER LOSSES	57.01	57.01	0.00
SUBTOTAL	<u>1197.20</u>	<u>1197.20</u>	<u>0.00</u>
<u>URBAN</u>			
RESIDENTIAL	15113.28	15113.28	0.00
COMMERCIAL	3018.16	3018.16	0.00
INDUSTRIAL	25836.31	25836.31	0.00
PUBLIC WORKS	17569.39	17569.39	0.00
OPEN SPACE	690.07	690.07	0.00
SUBTOTAL	<u>62227.21</u>	<u>62227.21</u>	<u>0.00</u>
TOTAL	<u>63424.41</u>	<u>63424.41</u>	<u>0.00</u>
<u>SUMMARY TOTALS</u>			
WITHOUT PROJECT CONDITIONS		WITH PROJECT CONDITIONS	PROJECT ACCOMPLISHMENT
<u>DAMAGE (\$1000)</u>	<u>83424.41</u>	<u>83424.41</u>	<u>0.00</u>
STRUCTURES	642.08	642.08	0.00
PEOPLE FLOODED	0.00	0.00	0.00
AREA FLOODED	33764.79	33764.79	0.00