

AD-A273 139



US Army Corps
of Engineers
Hydrologic Engineering Center

12

Systems Analysis Applications at the Hydrologic Engineering Center

Technical Paper No. 142

May 1992

S DTIC
ELECTE
NOV 30 1993
A

Approved for Public Release. Distribution Unlimited

1880 93-29287

93 11 29 150

Papers in this series have resulted from technical activities of the Hydrologic Engineering Center. Versions of some of these have been published in technical journals or in conference proceedings. The purpose of this series is to make the information available for use in the Center's training program and for distribution within the Corps of Engineers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

Several channel hydraulics and sedimentation analyses computer programs are available (*Computer* 1991). The HEC-2 steady state water surface profile program (*HEC-2* 1990) is used heavily in floodplain information and insurance studies. Now, unsteady flow models (single and multidimensional) are used to analyze complex flood waves and river and reservoir geometries.

Reservoir and other water control projects are simulated by the HEC-5 simulation of flood control and conservation systems computer program (*Simulation* 1989). This model operates reservoirs to minimize flooding at specified control points. The original HEC-5 analyzed flood events only, but it was later expanded to analyze reservoir yield as well. The multipurpose requirements of reservoir projects demanded not only simulation of dynamic flood events but also simulation of periods of record for hydropower and water supply. HEC-5 provides an important capability in HEC's simulation systems analysis capability.

SYSTEMS ANALYSIS BACKGROUND

Definition

Systems analysis is often used synonymously with operations research, but it has a much broader connotation. Systems analysis was originally a term used for mathematical analysis of systems of equations; operations research derived from procedures for solving complex scheduling problems during World War II (*Systems Analysis* 1975). Today, systems analysis implies a systematic solution procedure involving complex equations and interdisciplinary trade-offs. Operations research usually connotes linear and dynamic programming techniques, but it can also be interpreted to mean systems analysis.

Systems Analysis (1975), defined a variety of mathematical tools that comprise the capability of systems analysis: "There are a number of ways the different mathematical modelling techniques can be divided into classes. A useful aggregate classification is that of analytical optimization models, probabilistic models and techniques, statistical techniques, and simulation and search or sampling techniques."

This paper discusses HEC's system analysis endeavors in those four areas identified by *Systems Analysis* (1975): Simulation and search, probabilistic, statistical, and analytical optimization.

Simulation and search techniques are mathematical models of a process that has quantifiable relationships among the variables. The search techniques usually explore the simulation model results by varying input data and/or the models parameters. Probabilistic models describe stochastic processes. Statistical techniques include multivariate analysis, statistical inference, and decision theory. Analytical optimization techniques include the mathematical programming techniques such as linear and dynamic programming.

HEC's Systems Analysis Tools

HEC has applied all four classes of systems analysis tools. The principal technique has been mathematical simulation. A fundamental understanding and representation of the physical processes of hydrology and the impact of water management projects were important objectives of HEC. The resulting tools were watershed models, river and floodplain hydraulics models, reservoir operation models, and flood damage computation models.

Simulation and search techniques were developed to seek and identify

best-fit parameters of a physical process (e.g. infiltration and unit hydrograph parameters in a watershed model), and the best size of projects in a flood control system to optimize economic efficiency. Parameter estimation for real time flood forecasting is another application of search techniques, and an intelligent search technique called branch-and-bound enumeration has been applied to floodplain management planning.

Probabilistic models have not been developed or applied by HEC as much as the other systems analysis methods. The HEC-4 monthly streamflow-simulation computer program (*Monthly Streamflow* 1971) uses an autoregressive lag-one Markov process to estimate missing streamflows at gauges in a region. It can also generate synthetic streamflow sequences. The synthetic streamflow sequence is not new data, it is just one possible outcome from the input streamflow statistics. We used the monthly streamflow model in a Monte Carlo simulation to derive the probability distribution for future streamflows.

Statistical techniques have been used by HEC since its inception. HEC's first director, Leo R. Beard, wrote *Statistical Methods* (Beard 1964). It describes analytical methods for flood frequency computation and multivariate regression analyses to estimate hydrologic parameters. Expected annual damage is a basic measure of flood damage-mitigation project performance. It is derived from flow-frequency and stage and flow-damage relationships using techniques that are now embodied in HEC's *Flood Damage* (1988).

Analytical optimization models received little application at HEC in the early years but are now gaining acceptance. During the early 1960s linear, dynamic, and other mathematical programming techniques promised great advances in systemizing and automating decision making for water resources studies. However, efforts to capitalize on the promise have largely eluded the water resources community. There are many reasons for this, including the unwillingness of experienced hands to try something new; the failure of field professionals to understand the methods involved; and the fact that sometimes the actual physical system must be inordinately simplified to enable operations research techniques to be used. This was and still is especially true for attempts to use operations research techniques for reservoir system operations, but the operations research techniques have been applied in reservoir system planning.

The hydrologic engineer analyzes many detailed processes (reservoir inflow, outflow, and storage; downstream inflow; and channel hydraulics) to make a reservoir release decision. Often this must be accomplished during very short time intervals. The HEC-5 model (*Simulation* 1989) was developed beginning in the early 1970s to provide the needed detailed reservoir system operation simulation. Several internal and external attempts were made to apply linear and dynamic mathematical programming methods to solve this same problem. These attempts were not pursued because of lack of detail, perceived or real, in the solution techniques, and because of limited resources.

Two applications of analytical optimization models have been successful at HEC. A network linear programming method coupled with branch-and-bound enumeration was used to identify disposal sites for dredged material. A nonlinear mathematical programming algorithm was used in conjunction with a reservoir simulation model to determine optimal releases from the reservoir.

Application Philosophy

HEC has developed and supported a full range of simulation models for understanding how water resources systems function. It is assumed that experienced professionals can deduce the appropriate solution to a problem given the insight provided by selective execution of the simulation models. This deduction process has historically been the dominant methodology for planning and operational decisions in the water resources community, and it continues.

We have used systems analysis methods in a variety of situations with notable success. General applications were noted in the previous section; specific examples will be given in the following section. HEC's guiding principles for systems analysis applications have been: (1) Apply the techniques to solvable problems; (2) adapt the solution to the problem (not the other way around); (3) avoid inappropriate simplification of the problem; (4) use traditional simulation analysis tools in the system analysis solution where appropriate; and (5) use system analysis tools in an explainable manner.

Ford and Davis (1989) likened HEC's approach to problem solving to that of a successful hardware store. The hardware store staff works to understand a home-improvement project. The store offers a variety of tools and supplies to help the homeowner. They promote solutions of large problems by successfully completing small projects. The store services what it sells. HEC has followed a similar process for developing and applying systems analysis products. Ford and Davis's hardware-store-like rules are:

1. Invest the resources necessary to understand the planning problem.
2. Seek application rather than publication.
3. Consider a variety of system analysis tools. Select and fit the tools to the planning problem at hand.
4. Address solvable problems.
5. Train the user. Support continued use of the tools.

SYSTEMS ANALYSIS APPLICATIONS

Each of the four classes of systems analysis methods has been used by HEC to solve the Corps' water resources problems. Mathematical simulation models have played the major role. The models developed have been successful because of the technology transfer and computer program support provided by HEC (*Technology Transfer* 1988). From the Center's inception, technology transfer and computer program support have been set forth as primary responsibilities in conjunction with simulation model development. The following sections summarize the major types of technology developed in each of the four classes of systems analysis methods.

Simulation and Search Techniques

Simulation Models

The writer gave a brief history of HEC's simulation models development (Feldman 1981). The earliest models simulated the rainfall and snowmelt process and river hydraulics. Later, reservoir operation models were developed. Fig. 1 (Feldman 1981) summarizes the interconnected use of models for a floodplain information study. The HEC-1 watershed model and the HEC-2 water surface profile program were typical of the deterministic math-

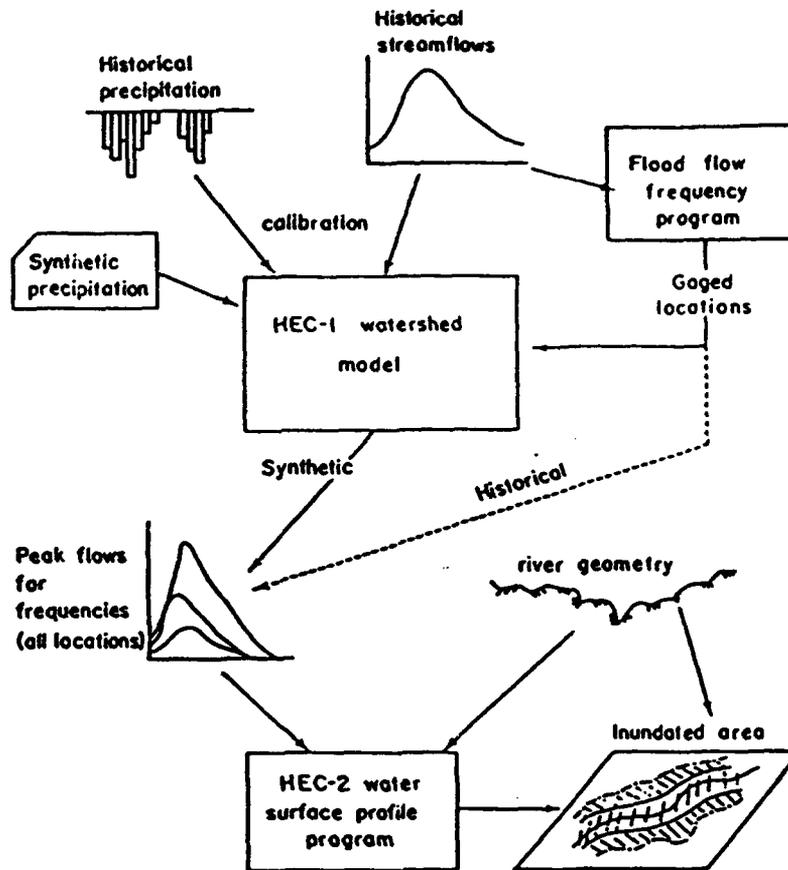


FIG. 1. Floodplain Information Study

ematical simulation models developed in the profession. Reservoir operation, flood damage, and river and reservoir hydraulics and sedimentation models were also developed. See *Computer* (1991) for a summary of current computer programs.

Univariate Search Techniques

Simulation models require calibration of their parameters to enable them to reproduce observed flood events. Manual sensitivity analysis was costly, so automated search techniques were developed. Beard used the univariate search technique in HEC-1 to obtain the best estimates of infiltration and unit hydrograph parameters. Automated sizing of urban flood control projects was also achieved with the univariate search technique. Davis (1975) used the technique to search for project sizes within the HEC-1 runoff model, which also included flood damage computation. All that was needed was to add project size-versus-cost data and to use the existing univariate technique to search the objective function. The objective function was to minimize the sum of project costs and expected annual flood damage (equivalent to maximizing net benefits) while using penalty functions to achieve performance targets.

Branch-and-Bound Techniques

As noted in HEC's history document (*The Hydrologic* 1989) the current thrust is to implement the branch-and-bound enumeration method for HEC computer programs. This method allows the nomination of alternatives in

a manner consistent with current planning practice. The alternatives are specified as distinct measures with specific sizes and operation characteristics. The method has been documented for manual application on flood control systems. It was successfully implemented using the HEC-5 reservoir system model to analyze the effectiveness of a set of flood damage reduction measures and the expected annual flood damage program to perform the economic analysis (*Branch-Bound* 1987). Fig. 2 (Ford and Oto 1989) depicts the use of simulation and branch-and-bound enumeration for floodplain management planning.

Flood Forecast, Observation and Update Process

Real time flood forecasting uses some aspects of control theory developed by industrial engineers for manufacturing processes. The process here is the watershed runoff and reservoir regulation system. The real process is observed through precipitation and streamflow measurements. Runoff forecasts are made with the simulation models. Then, when the forecasted point in time is actually observed, the parameters of the models can be updated to reflect the true observation as shown in Fig. 3. The parameter update process is complex because state variables (e.g. accumulated infiltration) of the model must be modified via the model's hydrologic processes. Reservoir

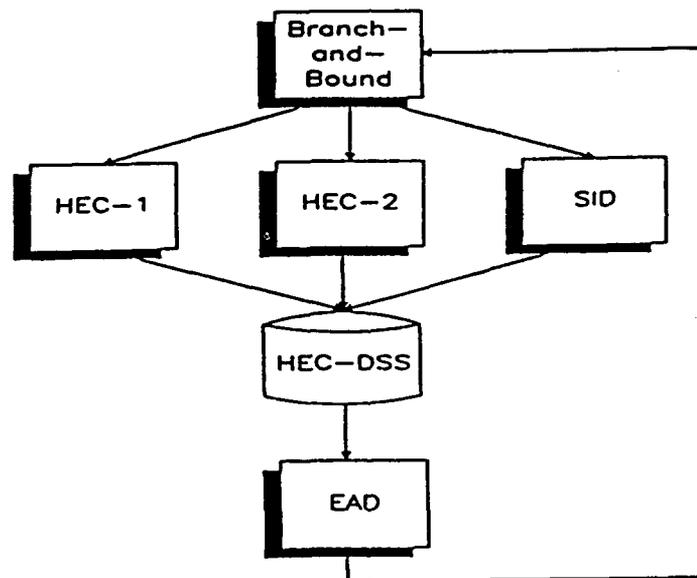


FIG. 2. Simulation with Branch-and Bound Enumeration

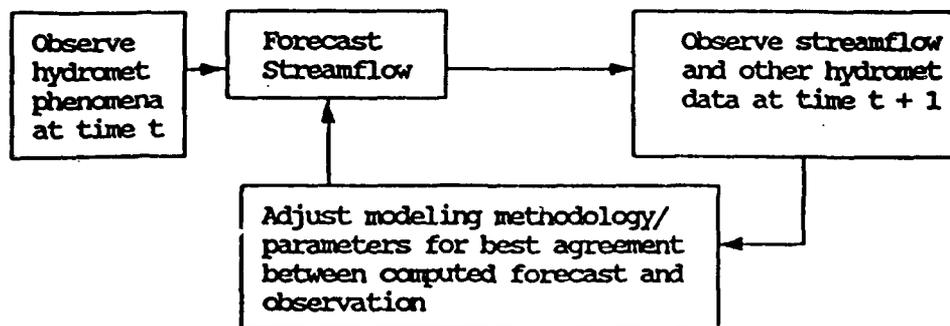


FIG. 3. Forecast, Observe, and Update Process

regulation is adjusted accordingly as the magnitude and distribution of the flood is observed (*A Software System* 1983).

Probabilistic Methods

Some of HEC's earliest work was in the use of stochastic hydrology to simulate monthly streamflow (*Monthly Streamflow* 1971). Stochastic hydrologic methods have been difficult for water managers to accept. This is because of managers' reliance on observed historical streamflow sequences to set water rights and obligations. Observed streamflow is natural; synthetic streamflow could make water managers liable for system failure.

One successful application of stochastic hydrology has been to forecast water supply during drought. HEC-4 and Monte Carlo simulations were used to derive a conditional probability distribution for the next month's flow given the observation of the current month's flow. The development of a derived distribution for various drought criteria using Monte Carlo simulations with HEC-4 is described in *Stochastic Analysis* (1985) and shown in Fig. 4.

Statistical Methods

Similar to probabilistic methods, HEC's work in statistical methods dates back to the Center's beginnings. The techniques used have been flood and

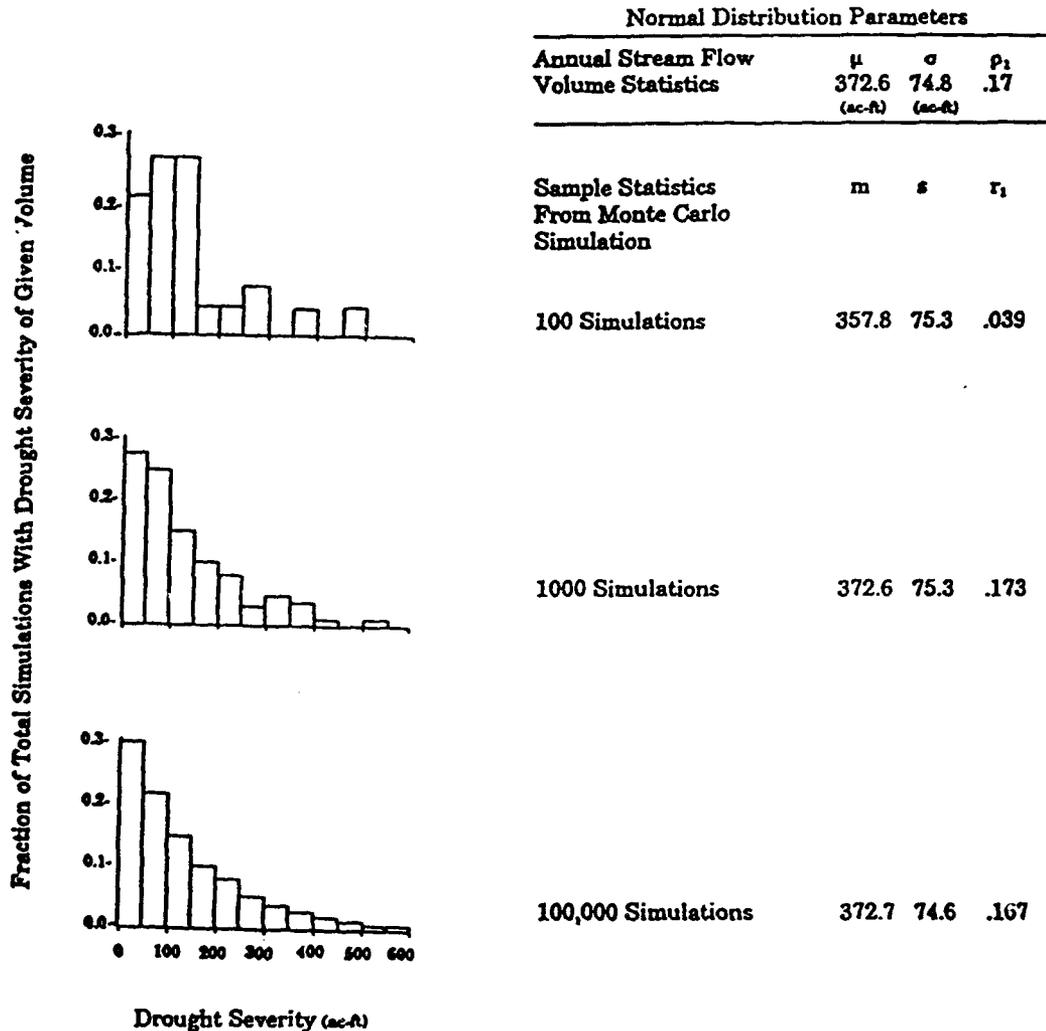


FIG. 4. Drought Severity Histograms by Monte Carlo Simulation

low-flow frequency analysis and multiple linear regression. The log-Pearson III frequency distribution recommended by HEC was adopted by the U.S. Water Resource Council for their uniform method for flood frequency computation. Regression analysis has provided a means to estimate hydrologic parameters in ungauged basins. The correlation of known hydrologic parameters to measurable basin characteristics has been a common practice in the profession. Regionalization studies have also been used for flood frequency statistical parameters such as skew.

Analytical Optimization Models

Implementing mathematical programming methods such as linear and dynamic programming has achieved limited success. There are two applications that have met with success: (1) Network programming for dredged material disposal; and (2) nonlinear programming for single reservoir operation.

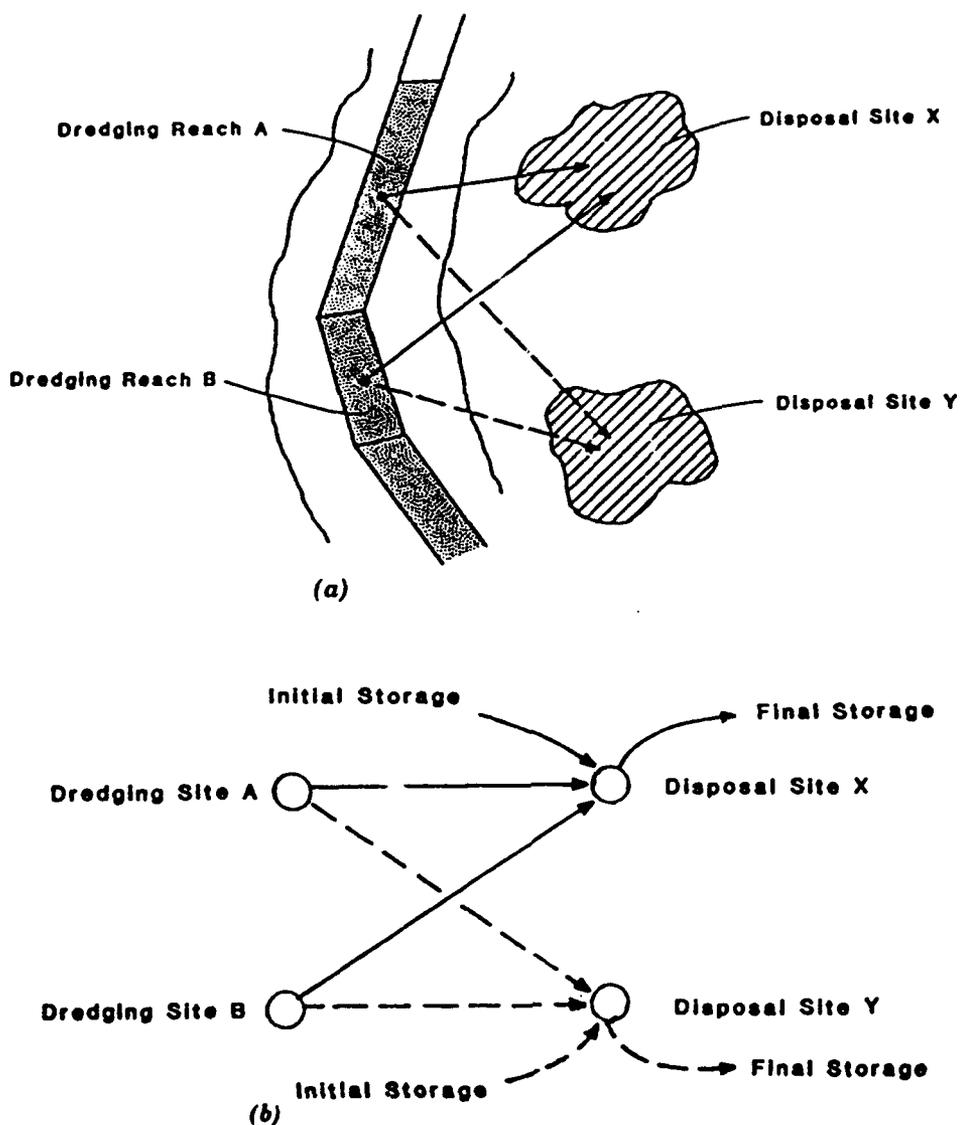


FIG. 5. Network Representation for Dredged-Material Disposal: (a) Disposal System; (b) Arc-Node Representation of Disposal System

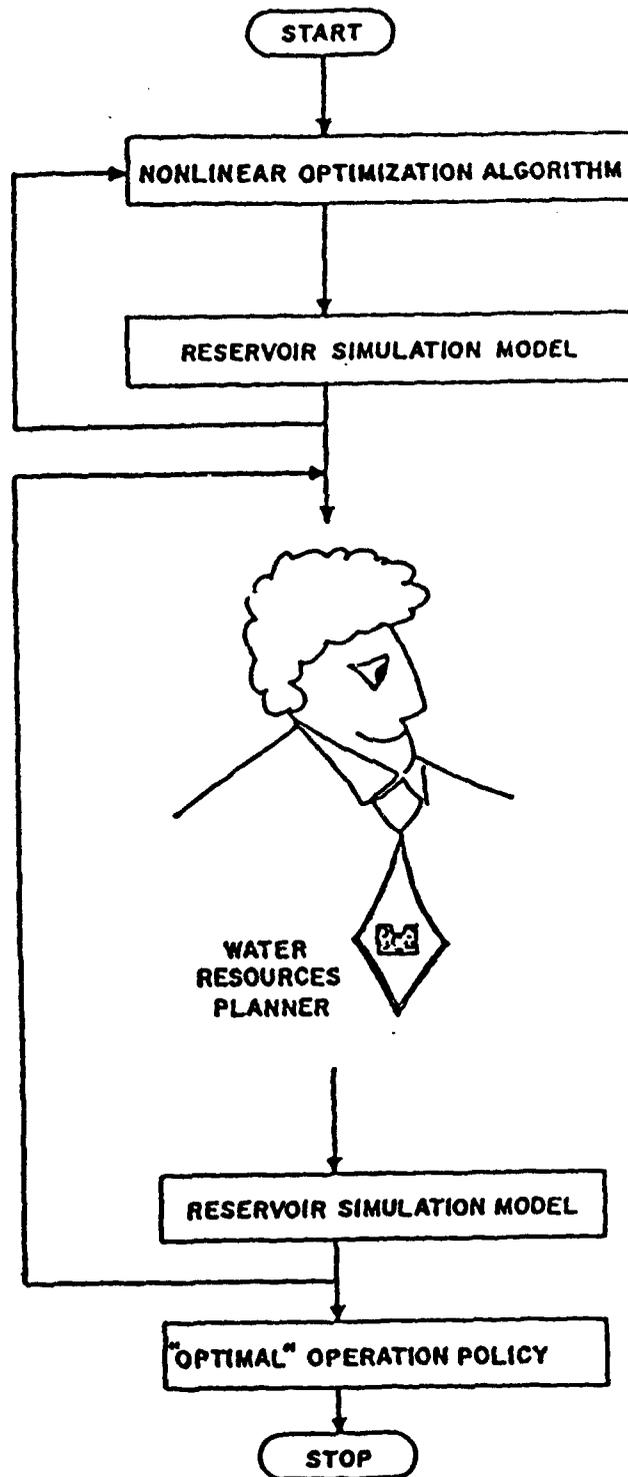


FIG. 6. Schematic of Solution Methodology

Network Programming

Dredged-material disposal sites in the Delaware estuary were becoming full, but dredging needed to continue. The correct decision, whether to buy new sites, extend leases and intensively manage existing sites, or close some navigation channels, was not obvious. HEC created a minimum-cost network-flow programming model of the dredge disposal system (*Dredged-*

Material 1984). The program formulates the optimization problem transparent to the user, solves the network (e.g. Fig. 5), and presents the results in user-specified output reports. The least-cost routing of sediment is a "network-with-gain" problem solved with an "out-of-kilter" algorithm. Management options are selected via branch-and-bound enumeration. District staff still use the program for strategic planning six years after the original development.

Nonlinear Mathematical Programming

The Sam Rayburn Reservoir in southeast Texas operates to prevent saltwater intrusion, to generate hydropower, to provide recreation, and to control floods. The operation to prevent saltwater intrusion is especially important to the downstream economy, which obtains freshwater from the river. If the reservoir releases cannot be maintained high enough to stop the saltwater intrusion, a saltwater barrier dam is constructed in the river. That barrier is washed out at higher flows.

In 1978, an existing single-reservoir simulation model was imbedded within a nonlinear programming algorithm to search for optimal operating policies for the Sam Rayburn Reservoir. Fig. 6 depicts the solution procedure developed by Ford et al. (1981). The optimization model is formulated as a constrained nonlinear programming problem. The variables are the volumes of storage allocated to four different operation levels. A box complex algorithm is used to solve the problem. The resulting operation of Sam Rayburn Reservoir with this methodology has been most successful at improving project performance and reducing the cost of operations. The saltwater barrier has not been necessary in the 10 years since this operation was adopted. Prior to that, the barrier was installed once or even twice a year. A follow-up analysis of the hydrology and operational results for the past 10 years is now being prepared.

CONCLUSIONS

The several systems analysis methods used at the HEC have been beneficial to the Corps' water resources development and management program. These techniques are not without their faults, however. We have followed a set of rules, like those used to run a hardware store, that have made these applications successful. Technology transfer and follow-up support of the techniques are key ingredients to successful application. The Sam Rayburn multipurpose reservoir operations project identified two important conclusions about successful systems analysis application. Ford et al. (1981) stated that:

1. "planners and engineers involved in planning and managing water resources projects will accept application of systems analysis techniques to problems they face if such applications can be demonstrated to: (1) Provide additional information for use in decision making; (2) reduce the time, money, or computer memory requirements for plan formulation or evaluation; or (3) increase the project benefits by identifying solutions that satisfy the practical constraints on operation and are sufficiently resilient to respond to changing conditions. Integrated use of a nonlinear programming formulation with the reservoir yield program for simulation of system operation, followed by an interactive smoothing process that allows input from the water managers satisfies these requirements."

2. "the resource managers/systems operators must be included in the policy formulation-evaluation 'DO-Loop' at many points." "Corps personnel who are involved daily with the operation were consulted in definition of the problem, in identification of the critical characteristics of the system that should be modeled, and in evaluation of the solutions developed by application of the optimization-simulation methodology. The results of the initial simulations of system operations were reviewed carefully by Corps District and Division personnel to assure that the modified reservoir simulation program adequately modeled the system operation."

FUTURE APPLICATIONS

Future application of systems analysis techniques at HEC will be to reservoir system regulation planning and expanded capabilities for simulation models. Both applications will support the Corps' objective to operate existing reservoir systems more efficiently and to design more effective projects for the future.

Reservoir System Operation Planning

Reservoir systems analysis will explore the use of network programming algorithms to improve regulation plans for multiple-use, multiple-reservoir systems. A project to help analyze the Missouri River main stem reservoir system operation is just being undertaken by HEC. The system of six reservoirs and seven downstream control points is being formulated as a minimum-cost, network-flow problem. Penalty functions (costs) are used to force the operation of the reservoirs system to meet desired goals and flow and storage constraints. Penalty functions were developed for flood damage, water supply, recreation, hydropower, navigation, and environmental interests. The environmental penalty (fish and wildlife protection) is not as directly based on real costs as the other penalties, but it serves to input explicitly a value on that resource. The sensitivity of the reservoir system performance to changes in water values for different purposes can be readily evaluated (*Missouri River 1991*).

The Missouri River is being analyzed for 92 years of monthly flows. Approximately 750,000 network equations are necessary to describe the objective function, continuity equations, and boundary constraints for that time period. For such a large system, the network solver becomes critical to timely completion of the computations. HEC is currently investigating several network solvers to reduce the computation time.

This initial, successful application of network systems analysis on the Missouri River system has given new insight to Corps water control managers. One problem that HEC is currently addressing is how to translate the results of the network analysis, such as time traces of optimal flows, storages, and penalties, into practical rules for real time reservoir operation. Applications of this network analysis capability are envisioned for several other Corps reservoir systems.

Next Generation Simulation Models

In 1990, HEC embarked on a project to develop the next generation of its simulation models. The objectives of the new modeling capabilities were to provide the user with better means to visualize and understand the process being simulated, and to build more engineering expertise into the models themselves. With the recent advances in computer hardware, it was no

longer necessary to have the computer programming constrained by the limitations of old machines. It was quite evident that the old batch processing format would not suffice and that interactive processing was necessary. The capabilities of modern workstation computers using the UNIX operating system offered a new level of processing power that could meet these next-generation software needs.

The intent of the next-generation models (called NexGen) is to put the users inside the model and give them the tools to easily work with the data, simulation processes, and results. It is planned to have the models interact with a data base for their input and for storing output results. The user will enter data into a data base that is constructed in a logical engineering-analysis format, not a format for some computer input device. Output will also be stored in the data base for ready analysis. A graphical user interface will facilitate the user's interaction with the computer. High-level graphics will let the user view the data, computations, and results for maximum understanding and analysis of the data and the physical processes.

Four technical areas are being addressed in the current NexGen effort, river hydraulics, watershed runoff, reservoir system, and flood damage analysis. The new models will have most of the capabilities of the existing HEC models in those areas plus new algorithms where appropriate. For example, current river hydraulics modeling capabilities require reformatting the river geometry differently for each analysis—steady state, unsteady, and multi-diversional. The new river analysis system of software will use consistent geometric representation of the river and floodplain for all applications. The simulation results will also be shown on the same geometric representations.

The ultimate goal is to have smarter models that automatically evaluate numerical stability (time and distance steps) and physical constraints of the process being simulated. The user will be advised of process-simulation problems, and alternative methods and analyses will be recommended where possible. Thus, more engineering expertise will be built into the model to enhance its application and interaction with the user. The NexGen project is a five-year effort, and interim products will be made available as the work progresses.

APPENDIX. REFERENCES

- "A software system to aid in making real-time water control decisions." (1983). *Computer Program Document No. 89*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- Beard, L. R. (1964). *Statistical methods in hydrology*. U.S. Army Corps of Engineers, Sacramento, Calif.
- "Branch-bound enumeration for reservoir flood control plan selection." (1987). *Research Document No. 35*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- Computer program catalog*. (1991). Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- Davis, D. W. (1975). "Optimal sizing of urban flood control systems." *J. Hydr. Div.*, ASCE, 101(8), 1077-1092.
- "Dredged-material disposal management model (D2M2)." (1984). *Computer Program Document No. 47*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- Feldman, A. D. (1981). "HEC models for water resources system simulation: Theory and experience." *Advances in hydrosience*, Ven Te Chow, ed., Vol. 12, Academic Press, Inc., New York, N.Y., 297-423.

- "Flood damage analysis package." (1988). *Computer Program Document No. 59*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- Ford, D. T., Garland, R., and Sullivan, C. (1981). "Operation policy analysis: Sam Rayburn Reservoir." *J. Water Resour. Plng. and Mgmt.*, ASCE, 107(2), 339-350.
- Ford, D. T., and Davis, D. W. (1989). "Hardware store rules for system-analysis applications." *Proc. of the Baltimore Symposium*, D. P. Loucks, ed., International Association of Hydrological Sciences, New York, N.Y., 180, 3-10.
- Ford, D. T., and Oto, A. (1989). "Floodplain management plan enumeration." *J. Water Resour. Plng. and Mgmt.*, ASCE, 115(6), 472-485.
- "HEC-1 flood hydrograph package." (1990). *Computer Program Document No. 1*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- "HEC-2 water surface profiles." (1990). *Computer Program Document No. 2*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- "Missouri River system analysis model—Phase I." (1991). *Project Report No. 15*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- "Monthly streamflow simulation, HEC-4, user's manual." (1971). *Computer Program Document No. 4*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- "Simulation of flood control and conservation systems, HEC-5, user's manual." (1989). *Computer Program Document No. 5*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- "Stochastic analysis of drought phenomena." (1985). *Training Document No. 25*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- Systems analysis in water resources planning.* (1975). Information Center, Meta Systems, Inc., Port Washington, N.Y.
- "Technology transfer of the Corps' hydrologic models." (1988). *Tech. Paper No. 120*, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.
- The Hydrologic Engineering Center—A quarter century 1964-1989.* (1989). Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, Calif.

TECHNICAL PAPER SERIES
(\$2 per paper)

- | | | | |
|-------|--|-------|---|
| TP-1 | Use of Interrelated Records to Simulate Streamflow | TP-38 | Water Quality Evaluation of Aquatic Systems |
| TP-2 | Optimization Techniques for Hydrologic Engineering | TP-39 | A Method for Analyzing Effects of Dam Failures in Design Studies |
| TP-3 | Methods of Determination of Safe Yield and Compensation Water from Storage Reservoirs | TP-40 | Storm Drainage and Urban Region Flood Control Planning |
| TP-4 | Functional Evaluation of a Water Resources System | TP-41 | HEC-5C, A Simulation Model for System Formulation and Evaluation |
| TP-5 | Streamflow Synthesis for Ungaged Rivers | TP-42 | Optimal Sizing of Urban Flood Control Systems |
| TP-6 | Simulation of Daily Streamflow | TP-43 | Hydrologic and Economic Simulation of Flood Control Aspects of Water Resources Systems |
| TP-7 | Pilot Study for Storage Requirements for Low Flow Augmentation | TP-44 | Sizing Flood Control Reservoir Systems by Systems Analysis |
| TP-8 | Worth of Streamflow Data for Project Design - A Pilot Study | TP-45 | Techniques for Real-Time Operation of Flood Control Reservoirs in the Merrimack River Basin |
| TP-9 | Economic Evaluation of Reservoir System Accomplishments | TP-46 | Spatial Data Analysis of Nonstructural Measures |
| TP-10 | Hydrologic Simulation in Water-Yield Analysis | TP-47 | Comprehensive Flood Plain Studies Using Spatial Data Management Techniques |
| TP-11 | Survey of Programs for Water Surface Profiles | TP-48 | Direct Runoff Hydrograph Parameters Versus Urbanization |
| TP-12 | Hypothetical Flood Computation for a Stream System | TP-49 | Experience of HEC in Disseminating Information on Hydrological Models |
| TP-13 | Maximum Utilization of Scarce Data in Hydrologic Design | TP-50 | Effects of Dam Removal: An Approach to Sedimentation |
| TP-14 | Techniques for Evaluating Long-Term Reservoir Yields | TP-51 | Design of Flood Control Improvements by Systems Analysis: A Case Study |
| TP-15 | Hydrostatistics - Principles of Application | TP-52 | Potential Use of Digital Computer Ground Water Models |
| TP-16 | A Hydrologic Water Resource System Modeling Techniques | TP-53 | Development of Generalized Free Surface Flow Models Using Finite Element Techniques |
| TP-17 | Hydrologic Engineering Techniques for Regional Water Resources Planning | TP-54 | Adjustment of Peak Discharge Rates for Urbanization |
| TP-18 | Estimating Monthly Streamflows Within a Region | TP-55 | The Development and Servicing of Spatial Data Management Techniques in the Corps of Engineers |
| TP-19 | Suspended Sediment Discharge in Streams | TP-56 | Experiences of the Hydrologic Engineering Center in Maintaining Widely Used Hydrologic and Water Resource Computer Models |
| TP-20 | Computer Determination of Flow Through Bridges | TP-57 | Flood Damage Assessments Using Spatial Data Management Techniques |
| TP-21 | An Approach to Reservoir Temperature Analysis | TP-58 | A Model for Evaluating Runoff-Quality in Metropolitan Master Planning |
| TP-22 | A Finite Difference Method for Analyzing Liquid Flow in Variably Saturated Porous Media | TP-59 | Testing of Several Runoff Models on an Urban Watershed |
| TP-23 | Uses of Simulation in River Basin Planning | TP-60 | Operational Simulation of a Reservoir System with Pumped Storage |
| TP-24 | Hydroelectric Power Analysis in Reservoir Systems | TP-61 | Technical Factors in Small Hydropower Planning |
| TP-25 | Status of Water Resource Systems Analysis | TP-62 | Flood Hydrograph and Peak Flow Frequency Analysis |
| TP-26 | System Relationships for Panama Canal Water Supply | TP-63 | HEC Contribution to Reservoir System Operation |
| TP-27 | System Analysis of the Panama Canal Water Supply | TP-64 | Determining Peak-Discharge Frequencies in an Urbanizing Watershed: A Case Study |
| TP-28 | Digital Simulation of an Existing Water Resources System | TP-65 | Feasibility Analysis in Small Hydropower Planning |
| TP-29 | Computer Applications in Continuing Education | TP-66 | Reservoir Storage Determination by Computer Simulation of Flood Control and Conservation Systems |
| TP-30 | Drought Severity and Water Supply Dependability | TP-67 | Hydrologic Land Use Classification Using LANDSAT |
| TP-31 | Development of System Operation Rules for an Existing System by Simulation | TP-68 | Interactive Nonstructural Flood-Control Planning |
| TP-32 | Alternative Approaches to Water Resource System Simulation | TP-69 | Critical Water Surface by Minimum Specific Energy Using the Parabolic Method |
| TP-33 | System Simulation for Integrated Use of Hydroelectric and Thermal Power Generation | TP-70 | Corps of Engineers Experience with Automatic Calibration of a Precipitation-Runoff Model |
| TP-34 | Optimizing Flood Control Allocation for a Multipurpose Reservoir | TP-71 | Determination of Land Use from Satellite Imagery for Input to Hydrologic Models |
| TP-35 | Computer Models for Rainfall-Runoff and River Hydraulic Analysis | TP-72 | Application of the Finite Element Method to Vertically Stratified Hydrodynamic Flow and Water Quality |
| TP-36 | Evaluation of Drought Effects at Lake Atitlan | | |
| TP-37 | Downstream Effects of the Levee Overtopping at Wilkes-Barre, PA, During Tropical Storm Agnes | | |

- TP-73 Flood Mitigation Planning Using HEC-SAM
TP-74 Hydrographs by Single Linear Reservoir Model
TP-75 HEC Activities in Reservoir Analysis
TP-76 Institutional Support of Water Resource Models
TP-77 Investigation of Soil Conservation Service Urban Hydrology Techniques
TP-78 Potential for Increasing the Output of Existing Hydroelectric Plants
TP-79 Potential Energy and Capacity Gains from Flood Control Storage Reallocation at Existing U. S. Hydropower Reservoirs
TP-80 Use of Non-Sequential Techniques in the Analysis of Power Potential at Storage Projects
TP-81 Data Management Systems for Water Resources Planning
TP-82 The New HEC-1 Flood Hydrograph Package
TP-83 River and Reservoir Systems Water Quality Modeling Capability
TP-84 Generalized Real-Time Flood Control System Model
TP-85 Operation Policy Analysis: Sam Rayburn Reservoir
TP-86 Training the Practitioner: The Hydrologic Engineering Center Program
TP-87 Documentation Needs for Water Resources Models
TP-88 Reservoir System Regulation for Water Quality Control
TP-89 A Software System to Aid in Making Real-Time Water Control Decisions
TP-90 Calibration, Verification and Application of a Two-Dimensional Flow Model
TP-91 HEC Software Development and Support
TP-92 Hydrologic Engineering Center Planning Models
TP-93 Flood Routing Through a Flat, Complex Flood Plain Using a One-Dimensional Unsteady Flow Computer Program
TP-94 Dredged-Material Disposal Management Model
TP-95 Infiltration and Soil Moisture Redistribution in HEC-1
TP-96 The Hydrologic Engineering Center Experience in Nonstructural Planning
TP-97 Prediction of the Effects of a Flood Control Project on a Meandering Stream
TP-98 Evolution in Computer Programs Causes Evolution in Training Needs: The Hydrologic Engineering Center Experience
TP-99 Reservoir System Analysis for Water Quality
TP-100 Probable Maximum Flood Estimation - Eastern United States
TP-101 Use of Computer Program HEC-5 for Water Supply Analysis
TP-102 Role of Calibration in the Application of HEC-6
TP-103 Engineering and Economic Considerations in Formulating
TP-104 Modeling Water Resources Systems for Water Quality
TP-105 Use of a Two-Dimensional Flow Model to Quantify Aquatic Habitat
TP-106 Flood-Runoff Forecasting with HEC-1F
TP-107 Dredged-Material Disposal System Capacity Expansion
TP-108 Role of Small Computers in Two-Dimensional Flow Modeling
TP-109 One-Dimensional Model For Mud Flows
TP-110 Subdivision Froude Number
TP-111 HEC-5Q: System Water Quality Modeling
TP-112 New Developments in HEC Programs for Flood Control
TP-113 Modeling and Managing Water Resource Systems for Water Quality
TP-114 Accuracy of Computed Water Surface Profiles - Executive Summary
TP-115 Application of Spatial-Data Management Techniques in Corps Planning
TP-116 The HEC's Activities in Watershed Modeling
TP-117 HEC-1 and HEC-2 Applications on the MicroComputer
TP-118 Real-Time Snow Simulation Model for the Monongahela River Basin
TP-119 Multi-Purpose, Multi-Reservoir Simulation on a PC
TP-120 Technology Transfer of Corps' Hydrologic Models
TP-121 Development, Calibration and Application of Runoff Forecasting Models for the Allegheny River Basin
TP-122 The Estimation of Rainfall for Flood Forecasting Using Radar and Rain Gage Data
TP-123 Developing and Managing a Comprehensive Reservoir Analysis Model
TP-124 Review of the U.S. Army Corps of Engineering Involvement With Alluvial Fan Flooding Problems
TP-125 An Integrated Software Package for Flood Damage Analysis
TP-126 The Value and Depreciation of Existing Facilities: The Case of Reservoirs
TP-127 Floodplain-Management Plan Enumeration
TP-128 Two-Dimensional Floodplain Modeling
TP-129 Status and New Capabilities of Computer Program HEC-6: "Scour and Deposition in Rivers and Reservoirs"
TP-130 Estimating Sediment Delivery and Yield on Alluvial Fans
TP-131 Hydrologic Aspects of Flood Warning - Preparedness Programs
TP-132 Twenty-five Years of Developing, Distributing, and Supporting Hydrologic Engineering Computer Programs
TP-133 Predicting Deposition Patterns in Small Basins
TP-134 Annual Extreme Lake Elevations by Total Probability Theorem
TP-135 A Muskingum-Cunge Channel Flow Routing Method for Drainage Networks
TP-136 Prescriptive Reservoir System Analysis Model - Missouri River System Application
TP-137 A Generalized Simulation Model for Reservoir System Analysis
TP-138 The HEC NexGen Software Development Project
TP-139 Issues for Applications Developers
TP-140 HEC-RAS/HEC-2 Comparison Study
TP-141 HEC-RAS Conveyance Comparison
TP-142 Systems Analysis Applications at the Hydrologic Engineering Center
TP-143 Runoff Prediction Uncertainty for Ungauged Agricultural Watersheds
TP-144 Review of GIS Applications in Hydrologic Modeling

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION Unclassified		1b. RESTRICTIVE MARKINGS	
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION / AVAILABILITY OF REPORT Distribution of this document is unlimited	
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE		5. MONITORING ORGANIZATION REPORT NUMBER(S)	
4. PERFORMING ORGANIZATION REPORT NUMBER(S) Technical Paper No. 142		7a. NAME OF MONITORING ORGANIZATION	
6a. NAME OF PERFORMING ORGANIZATION Hydrologic Engineering Center	6b. OFFICE SYMBOL (If applicable) CEWRC-HEC	7b. ADDRESS (City, State, and ZIP Code)	
6c. ADDRESS (City, State, and ZIP Code) 609 Second Street Davis, CA 95616		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
8a. NAME OF FUNDING / SPONSORING ORGANIZATION Water Resources Support Center	8b. OFFICE SYMBOL (If applicable) CEWRC	10. SOURCE OF FUNDING NUMBERS	
8c. ADDRESS (City, State, and ZIP Code) Casey Building # 2594 Ft Belvoir, VA 22060-5586		PROGRAM ELEMENT NO.	PROJECT NO.
		TASK NO.	WORK UNIT ACCESSION NO.
11. TITLE (Include Security Classification) Systems Analysis Applications at the Hydrologic Engineering Center			
12. PERSONAL AUTHOR(S) Arlen D. Feldman			
13a. TYPE OF REPORT Technical Paper	13b. TIME COVERED FROM _____ TO _____	14. DATE OF REPORT (Year, Month, Day) 1992 May	15. PAGE COUNT 13
16. SUPPLEMENTARY NOTATION			
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	systems analysis, operations research, water resources, hydrology, reservoirs, planning, statistics	
	SUB-GROUP		
19. ABSTRACT (Continue on reverse if necessary and identify by block number) In the broadest sense of systems analysis, the Hydrologic Engineering Center (HEC) has been actively applying systems analysis techniques since its inception in 1964. HEC's basic systems analysis method has been the simulation of watershed and river basin processes. Several other systems analysis activities are an outgrowth of that basic simulation capability: automated parameter estimation algorithms, synthetic streamflow generation, network analysis, branch-and-bound search techniques, numerical methods, risk and uncertainty analysis, and expert systems. Systems analysis at the HEC has been an approach to problem solving as much as the actual technical methods. This philosophy of problem solving can be likened to a local hardware store's approach to do-it-yourself home repair. The hardware store personnel make a genuine effort to understand the homeowner's problem; then, they offer tools, supplies, and advice to solve the problem. Examples of these systems analysis techniques and their application to hydrologic engineering problem solving, are presented in this paper.			
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS		21. ABSTRACT SECURITY CLASSIFICATION Unclassified	
22a. NAME OF RESPONSIBLE INDIVIDUAL DARRYL W. DAVIS		22b. TELEPHONE (Include Area Code) (916) 756-1104	22c. OFFICE SYMBOL CEWRC-HEC